SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1897, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXXVII.—No. 22. ESTABLISHED 1845. | NEW YORK, NOVEMBER 27, 1897. | $3.00 A YEAR. WEEKLY.

LENGTHENING A HUDSON RIVER STEAMBOAT.

Whenever the historian shall take up his pen to write the complete story of steam navigation, if he be a fit man for his task, with a due sense of perspective and proportion, he will write large and lengthily the chronicles of "steamboating" on the waters of the Hudson River. Here, surely, if anywhere, we must look for the cradle and nursery of the practical steam propelled freight and passenger carrying vessel; for when Robert Fulton dispatched the Clermont, a 160 ton steamer, on its first trip from New York to Albany on the morning of August 7, 1807, he established his claim as the father of the steamship with as much certainty as the Rocket in a later day entitled Stephenson to be called the father of the locomotive.

The Clermont was a worthy ancestor to the fleet of truly magnificent boats which have made the Hudson River service the most famous of its kind in the world. The requirements of the service have produced two distinct classes of boats, those for night service, carrying both freight and passengers, of which the Adirondack, of the People's Line, is the finest and latest example, and another class for day service, represented by the historic Mary Powell and the swift and luxurious New York and Albany, of the Albany Day Line. Each type of boat has been designed with special reference to the necessities of night or day service. The night boats, as exemplified in the Adirondack, are characterized by large freight-carrying capacity, lofty tiers of staterooms for the accommodation of passengers, and a high rate of speed, the boat named having made about 20 knots under favorable conditions. The day boats, carrying no

(Continued on page 342.)

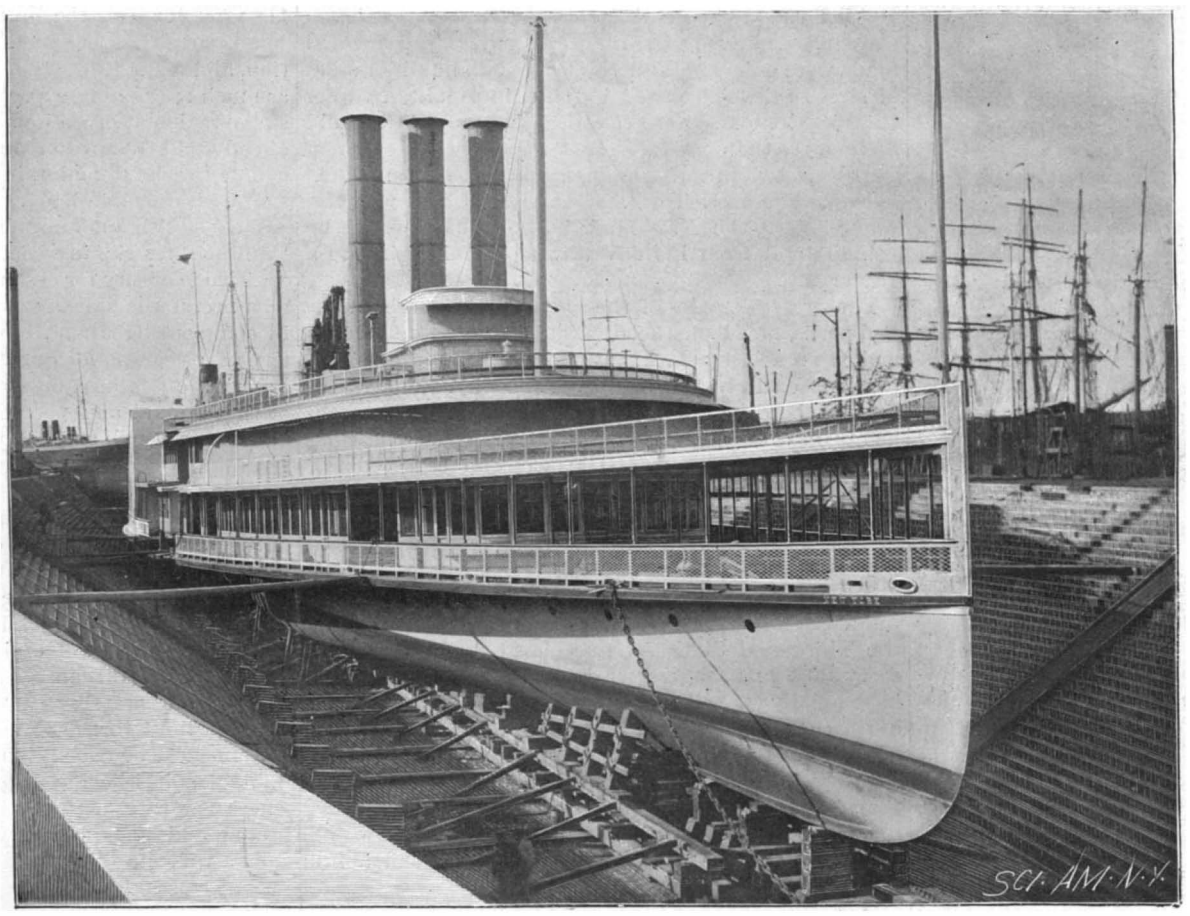

BOW VIEW, SHOWING SLIDING WAYS.

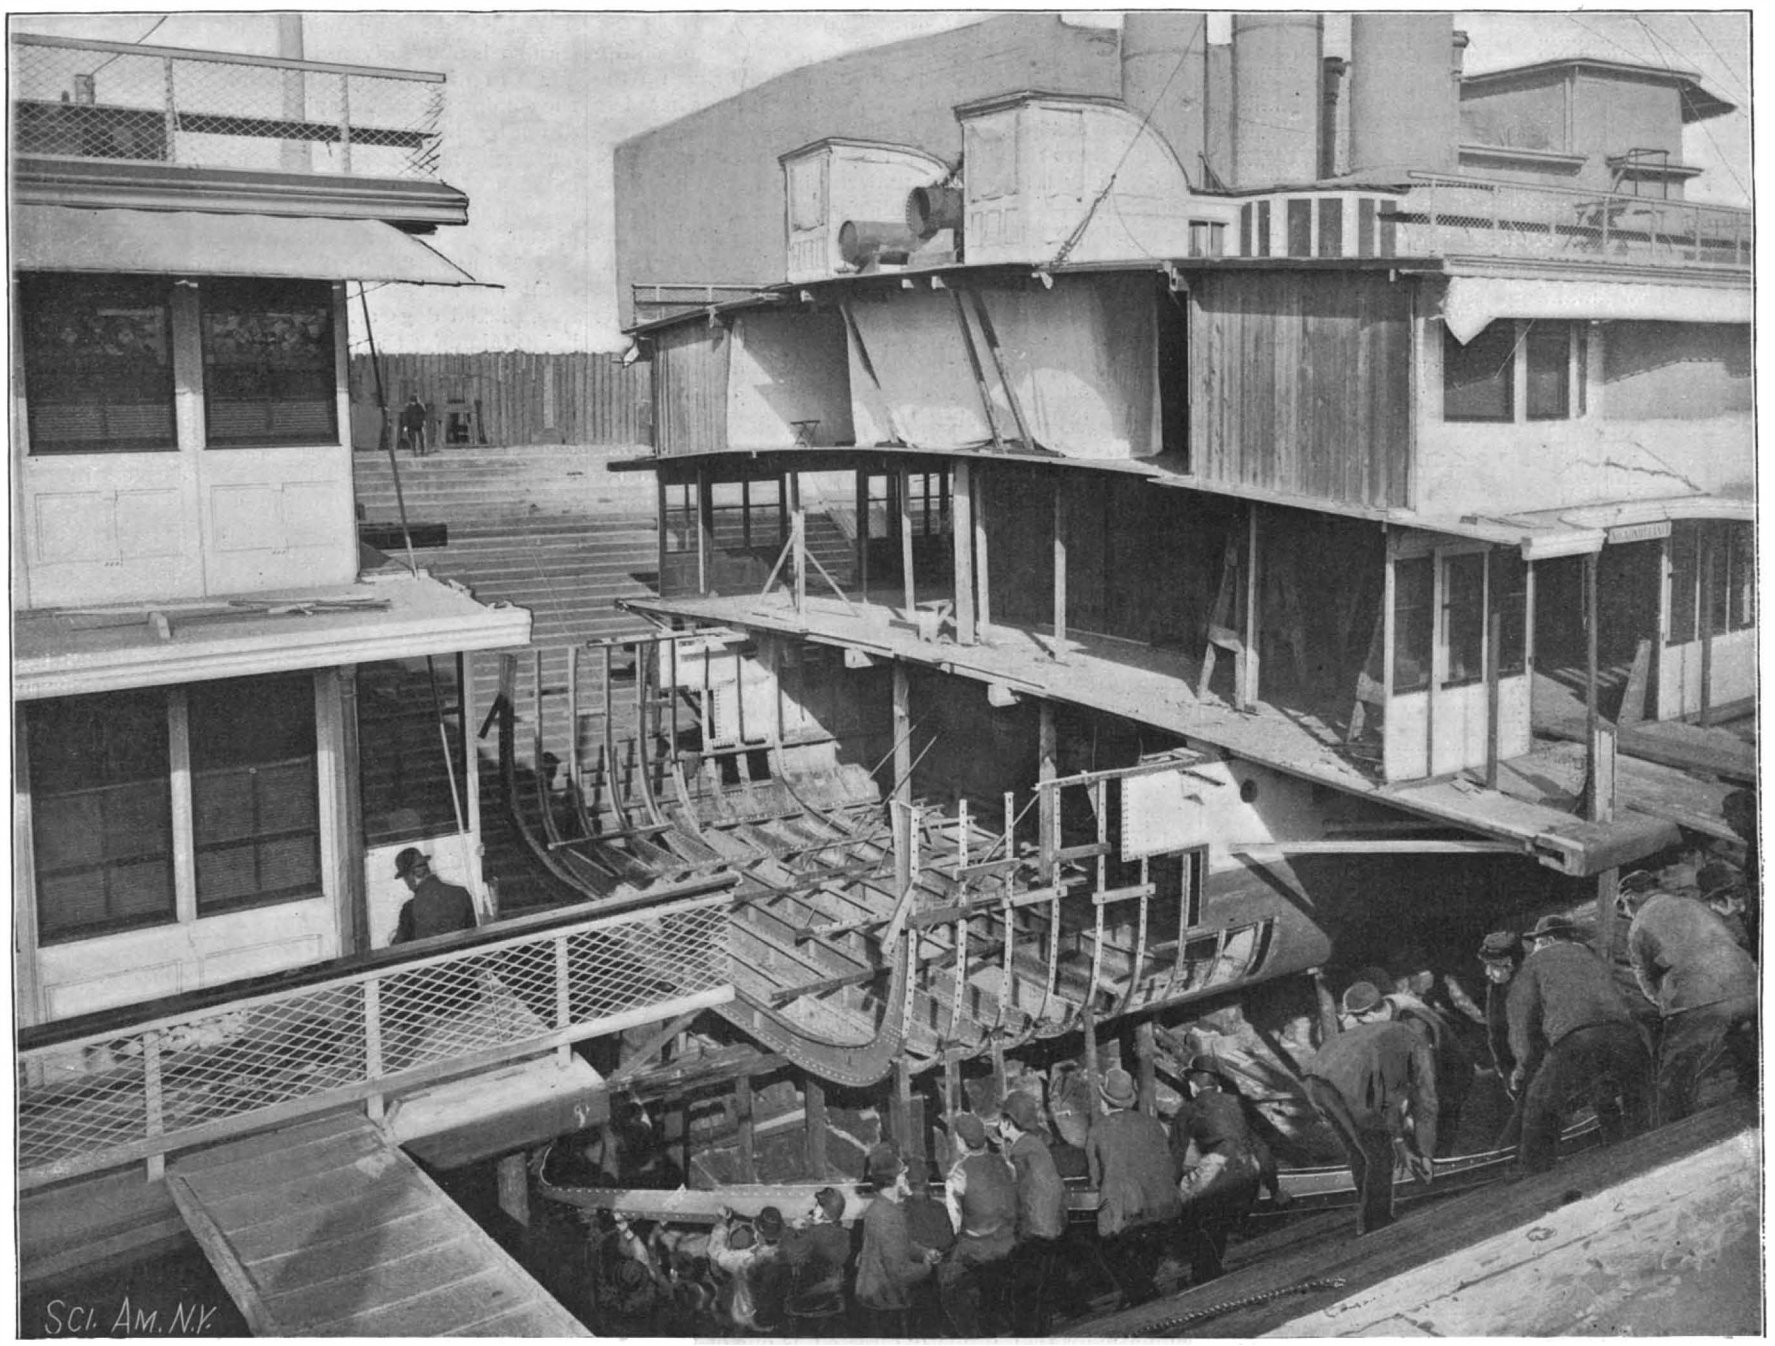

LENGTHENING A HUDSON RIVER STEAMBOAT—THE HULL PULLED APART—FRAMING THE NEW SECTION.

© 1897 SCIENTIFIC AMERICAN, INC.

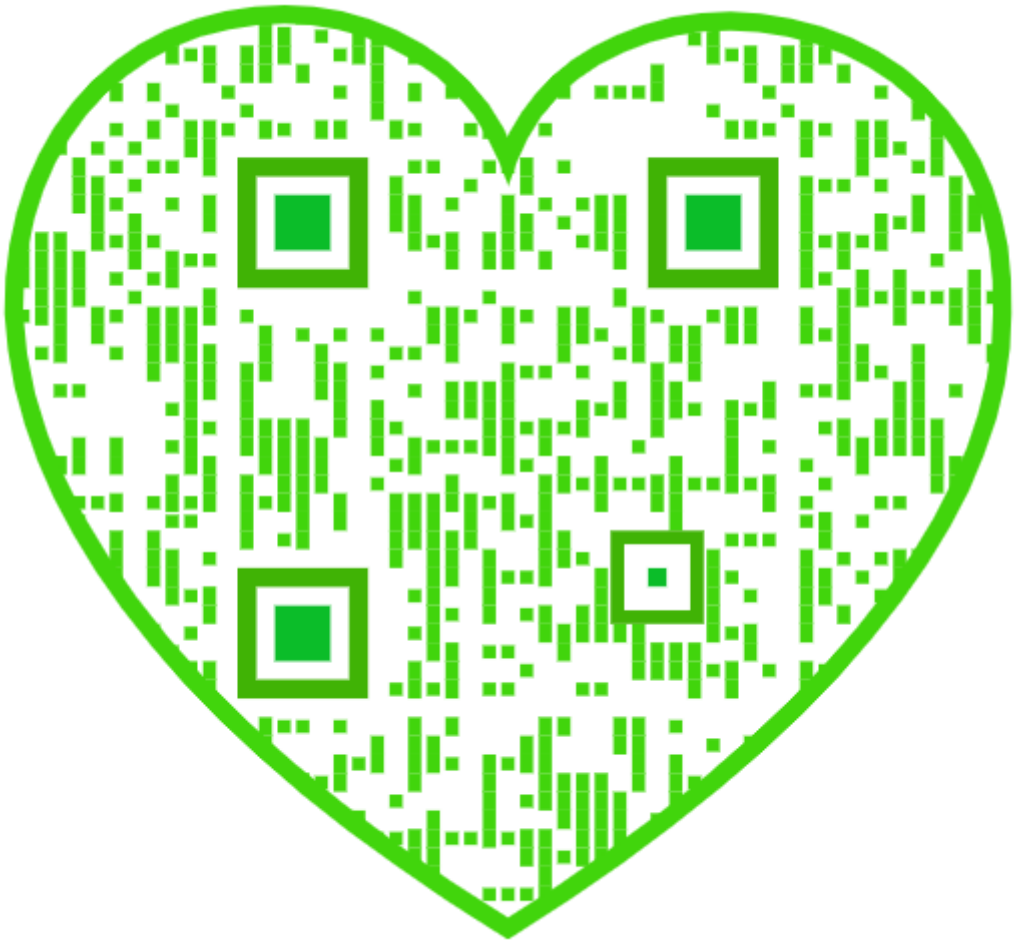

Scientific American.

ESTABLISHED 1845

MUNN & CO., - - - EDITORS AND PROPRIETORS.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, - - NEW YORK.

TERMS FOR THE SCIENTIFIC AMERICAN.

(Established 1845.)

One copy, one year, for the U. S., Canada or Mexico.....$3.00
One copy, six months, for the U. S., Canada or Mexico..... 1.50
One copy, one year, to any foreign country, postage prepaid, £0 16s. 5d. 4.00

Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, corner Franklin Street, New York.

The Scientific American Supplement

(Established 1876)

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year, or £1 4s. 5d., to foreign countries belonging to the Postal Union. Single copies 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries, *eight dollars and fifty cents a year*, or £1 14s. 11d., postage prepaid.

Building Edition of Scientific American.

(Established 1885.)

THE BUILDING EDITION OF THE SCIENTIFIC AMERICAN is a large and splendidly illustrated periodical, issued monthly, containing floor plans and perspective views pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To architects, builders, and all who contemplate building this work is invaluable.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign countries, $3.00 a year, or £0 12s. 4d. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, $5.00 a year. To foreign countries, $6.50 a year, or £1 6s. 9d. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN, and SUPPLEMENT, $9.00 a year. To foreign countries, $11.00 a year, or £2 5s. 2d., postage prepaid.

Export Edition of the Scientific American

(Established 1878)

with which is incorporated "LA AMERICA CIENTIFICA E INDUSTRIAL," or Spanish edition of the SCIENTIFIC AMERICAN, published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number contains about 100 pages, profusely illustrated. It is the finest scientific industrial export paper published. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. THE SCIENTIFIC AMERICAN EXPORT EDITION has a large guaranteed circulation in all commercial places throughout the world. $3.00 a year, or £0 12s. 4d., postpaid to any part of the world. Single copies, 25 cents.

MUNN & CO., Publishers, 361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, NOVEMBER 27, 1897.

Contents.

(Illustrated articles are marked with an asterisk.)

Artillery force, increase..... 343
Arctic exploration, organized... 343
Armor plate process, new Krupp 343
Beet sugar industry, the American..... 339
Borax..... 346
Boring oil wells, coast of California*..... 341
Car, a motor and passenger*..... 344
Cells, steel, for prisons*..... 345
Coal, the world's production of.. 340
Dining table, a unique*..... 347
Erie County Penitentiary, the*.. 345
Fishes, tuberculous disease in... 346
Flowers and grasses, preserving 343
Gas burner, Billington's*..... 340
Glass cement, chrome glue for.. 343
Hudson River steamboats*..... 337
Ice breaking steamer, an..... 344
Inventions recently patented.... 348
Maasdam, accident to the..... 344
Moulds for soldering pipes*..... 341
Mucilage reservoir, Lewis'*..... 340
New York rapid transit..... 338
New York, the steamboat*..... 337
North Pole, quest of the..... 338
Notes and receipts, miscellaneous..... 343
Oil well boring at sea*..... 341
Oysters, artificial..... 343
Patents granted, weekly record of..... 348
Peters, Dr. Carl, punished..... 346
Pipes, soldering*..... 341
Polar expedition, Swedish..... 343
Printing ink production..... 343
Prison construction, model*..... 345
Redwood trees, the giant*..... 347
Report Secretary of Interior..... 338
Science notes..... 343
Sea coast defense, militia for.... 342
Ships, model, testing tank for... 344
Smoke a preventive of lightning 341
Steamboat, lengthening a*..... 337
Steam motor car, a*..... 344
Strontium, discovery of..... 341
Ventilation in prisons*..... 346
Vesuvius in eruption..... 343
Water power utilization..... 347
Weir, Fuchs' automatic*..... 340

TABLE OF CONTENTS OF

Scientific American Supplement

No. 1143.

For the Week Ending November 27, 1897.

Price 10 cents. For sale by all newsdealers.

PAGE

I. ASTRONOMY.—The Observation of Meteors, with Especial Reference to the Leonids..... 18277
II. BICYCLES.—Brigg's Bicycle Attachment.—1 illustration..... 18265
III. BOTANY AND HORTICULTURE.—Echinocystis Lobata.—1 illustration..... 18274
Renewing Old Trees..... 18274
Tobacco in Germany..... 18275
IV. CHEMISTRY.—Acetylene as a Quantitative Reagent..... 18278
Chemical Processes in a Gas Plant..... 18273
Determination of Sulphur in Coal..... 18273
The Behavior of Argon in X Ray Tubes.—A paper read before the British Association by Prof. H. L. CALLENDAR and Mr. N. N. EVANS..... 18272
V. CHRONOLOGY.—The Unification of Time..... 18276
VI. CIVIL ENGINEERING.—Pneumatic Locks for Canals.—By CHAUNCEY N. DUTTON..... 18264
VII. ELECTRICITY.—The Economy and Utility of Electrical Cooking Apparatus.—By JOHN PRICE JACKSON.—This paper gives valuable figures as to the cost of electricity as a fuel..... 18271
The Electric Transportation System of Fairmount Park, Philadelphia.—4 illustrations..... 18270
VIII. LOCOMOTIVE ENGINEERING.—The Hagan's Coupled Locomotive.—A new locomotive for the Prussian State Railways.—1 illustration..... 18266
The Locomotives for the Jungfrau Railway..... 18267
IX. MARINE ENGINEERING.—M. Bazin's Roller Steamship.—An illustrated description of the new roller steamship which has recently been unsuccessfully tested in France.—A full account of this marine curiosity.—3 illustrations..... 18263
X. MECHANICAL ENGINEERING.—Machine for Drying up a Marsh or for Drawing Water from a Shallow Place.—A curious old engraving reproduced from a rare work.—1 illustration..... 18267
One Hundred Ton Testing Machine.—1 illustration..... 18266
XI. METALLURGY.—Iron and Steel Production in France..... 18268
XII. MISCELLANEOUS.—Stature of Men of Genius..... 18274
Electrical Notes..... 18269
Miscellaneous Notes..... 18269
Selected Formulæ..... 18269
Hot Soda Water Fountain Food Preparations..... 18268
XIII. NATURAL HISTORY.—The American Lobster..... 18277
XIV. PHYSICS.—Mercury Pumps.—2 illustrations..... 18273
XV. RELIGIONS.—The Guimet Museum.—A description of the museum of comparative religions at Paris.—3 illustrations..... 18275
XVI. STEAM ENGINEERING.—The De Laval Steam Boiler.—A description of an interesting boiler which is automatic in operation and regulation.—The feeding with coal, water and air being done by the apparatus itself.—2 illustrations..... 18265
XVII. TECHNOLOGY.—History of Tinfoil..... 18267
Disinfectant Soaps..... 18268
Typewriter Ribbons.—By ISIDOR FURST.—A valuable paper, giving formulas..... 18267
XVIII. TRAVEL AND EXPLORATION.—The Lower Congo and its People..... 18273

APPELLATE COMMISSION REPORT FAVORABLY ON THE NEW YORK RAPID TRANSIT SCHEME.

The commissioners appointed by the Appellate Division of the Supreme Court to determine whether the rapid transit tunnel should be constructed have filed a report in favor of the building of the road. Every one who is intelligently informed as to the problem of transportation in this city, and is disposed to look at the question from a broadminded standpoint, will be glad to know that this, the greatest and most needed improvement in the history of the city, is now in a fair way to be accomplished. So rapid is the growth of New York that not even the great enlargement of their facilities which the street traction companies are now making can do more than give a temporary relief to the congested traffic. If the present system of elevated roads were enlarged, and the whole two hundred miles of street railways owned by the Metropolitan Street Railway Company were electrically equipped, it would do no more than provide a seat for every passenger in the busiest hours of the day; and unless the tunnel scheme were carried out, it would be but a very few years before the New York business man would be going to and from his downtown office hanging to a hand strap.

The report disposes of the so-called engineering risks and perils, of which the opposition has attempted to make so much, by stating at once that the road as proposed is entirely practicable. The objections raised against the Broadway scheme on the score of encroachments on vault spaces are, in the opinion of the commissioners, entirely avoided in the Elm Street plans, which call for a fifty foot width, as against a seventy foot width in the Broadway plan. The cost will not exceed $35,000,000, and in the opinion of the board $30,000,000 will pay for the road.

In regard to the second objection that the road, if built, would not pay expenses, it is estimated that as the Third and Sixth Avenue elevated railroads now carry 390,000 passengers per day, the tunnel road would have a daily capacity of 425,000. The passenger traffic of the city is increasing at the rate of 20,000,000 a year, which in the five years that will be consumed in building the new road would amount to 300,000 a day more than are now carried on all roads. This increase, together with the surplus which is now overcrowding the existing roads, should give the new road a full volume of travel.

It is estimated that the income from passenger traffic and advertising would reach $5,575,000, and the operating expenses, estimated at 60 per cent of the passenger traffic receipts, are put down at $3,285,000. The interest on $35,000,000, together with depreciation of equipment and sinking fund payment, would bring up the annual expenditure to $5,557,000, or somewhat less than the receipts.

In reply to the statement that the financial condition of the city renders the undertaking impossible, the report quotes the comptroller's testimony that if the assessed valuation of real estate increases as fast in the next decade as it has in the past ten years, it would allow the city to incur an indebtedness of $135,295,662 without any reduction of the margin which now exists between its net debt and the limit allowed by law.

We have spoken of the good work being done by the Metropolitan Street Railway Company in equipping its system with the electric underground trolley. Incidentally, a portion of the completed work gives a fair example of what the proposed underground transit will be like. We refer to the portion of the Fourth Avenue line which runs through the tunnel between Forty-second and Thirty-second Streets. The floor was asphalted and the walls and arch were whitewashed just before and after the laying of the splendid track with which the tunnel is equipped. The new cars now pass swiftly and with little noise through an atmosphere that is as pure as the most fastidious could desire, and any one that travels by this route must admit that the discomforts of the proposed rapid transit tunnel will prove to be more imaginary than real.

THE QUEST OF THE NORTH POLE.

In all the recorded history of our race there is nothing to compare with the unfailing persistence with which the quest of the North Pole has been carried on. It is not that men have failed to show perseverance in other enterprises of a military, scientific or romantic character, or that they have suffered less or run less risk to life and limb; but the fact that renders the search for the North Pole altogether unique and incomparable is the comparative smallness of the results which are expected to crown a successful attempt.

It is not likely that even the most practical among the many explorers who have set out for the North Pole has expected to contribute to the world's store of scientific knowledge any facts that would add greatly to its sum; and it is likely that the majority of the explorers who have gone north since the time when the impracticability of a northwest passage was proved have consciously or unconsciously been moved by the pure spirit of daring and discovery, and that spirit of emulation which, properly directed, is one of the most powerful agencies of human progress.

However, without attempting to analyze the motives which underlie these crusades of the nineteenth century, it must be admitted that their increasing frequency, their exhibition of courage and unconquerable purpose, and the ingenuity and resourcefulness with which they are in quick succession conceived and carried out, all indicate that man has set his heart resolutely upon reaching the North Pole, and that he is within measurable distance of the day when he will stand there.

The prospects of an early discovery (so called) of the North Pole are rendered more likely by the intelligent methods which are now being proposed for future expeditions. The work that has been done already has been too much of the nature of a forlorn hope. The small party that has cut loose from the main expedition, and made the "dash for the pole," has had about as much reasonable expectation of success as would a single regiment of an invading army, if it should push ahead and attempt to reach the interior of an enemy's country without maintaining its lines of communication with the main body.

We publish on another page a timely letter from Timbirsk, Russia, in which the writer dwells upon the positive necessity for systematic and strongly organized advance, if the pole is ever to be reached. The writer, in commenting upon Mr. Wellman's proposed expedition next year, points out two elements which are liable to bring on failure, one of these being haste and the other national and personal egotism. While the suggestion that such expeditions should partake of an international character, "accepting both universal subscription and universal help," is a good one, which, if adopted, would insure the expedition being carried out on the scale which, in our opinion, is necessary to success, we think that national and personal egotism has been and will continue to be a powerful and perfectly legitimate controlling factor in Arctic exploration. The element of undue haste, on the other hand, has been a fruitful cause of failure. The expedition that sets out deliberately to journey to the pole must place no strict limit to the time which will be consumed in the effort. The expedition should be considered in the light of a hostile incursion into an enemy's country, where the rate of progress will be determined by expected and unexpected resistance. It should start from a well-supplied base and should maintain a strong line of communications. If there is one thing more than another that the tragic history of Arctic exploration teaches, it is that the northern citadel can never be taken by a dashing assault.

By far the most promising attempt, judged by the standards above given, is that which will be made by our own distinguished explorer, Lieut. Peary, during the coming year. The plan of attack includes an expedition by ship through Robeson Channel to a point as far north on the Greenland coast as possible; then an advance of the party of Eskimos, with a few selected white leaders, by easy stages to the northern terminus of the North Greenland archipelago, caches of provisions being established at each headland; and from this point the inevitable "dash for the pole"—two Eskimos, picked dogs and the lightest possible equipment being taken for the final three hundred miles.

The fact that both Peary and Wellman intend to carry their lines of communication only as far north as the mainland, or archipelago, as the case may be, extends, seems to indicate that, in their opinion, it would be impossible to establish a chain of caches or depots across the sea of ice which encircles, or is supposed to encircle, the North Pole. If it is possible to place a line of depots across the floating ice beyond the land, it seems like inviting disaster not to do so, and one is driven to the conclusion that it is only the increased cost that prevents such a plan from being carried out. If our surmise is correct, the chances of reaching the pole would be very much greater if the two or three separate expeditions which are planned for next year were to join forces, and make the attempt through an unbroken line of communications and on the general lines suggested by Lieut. Peary.

REPORT OF THE SECRETARY OF THE INTERIOR.

In his first annual report, the Hon. Cornelius N. Bliss, Secretary of the Interior, deals at length and in an interesting manner on the condition, work and needs of this department of the government. We give below some of the topics touched upon in the report. In speaking of the devastation of the public domain by forest fires, the Secretary says:

"There are now existing nineteen forest reservations, embracing lands having an estimated area of 18,993,280 acres, which from time to time have been set aside by presidential proclamations. Thirteen forest reserves created by proclamation of February 22, 1897, were, with the exception of two in the State of California, suspended by the sundry civil act of June 4, 1897, until March 1, 1898. The suspended reservations contain an estimated area of 19,951,360 acres. The preservation of the public forests is a matter of vital interest to the entire nation. The enactment of adequate laws for their protection and the proper enforcement thereof, coupled

© 1897 SCIENTIFIC AMERICAN, INC.

with the inauguration of a comprehensive forest system, can only effect such result.

"I most heartily concur in the recommendation of the Commissioner of the General Land Office that liberal appropriations be made by Congress for the forestry service.

"Attention is directed to the law, which provides a penalty for the cutting or destruction of live oak or red cedar, or other timber on the public lands. It is open to serious objection, in that it is inadequate for the punishment of offenses to which it relates; it fails to discriminate clearly and justly as to what constitutes a crime with respect to the use of public timber. As this law is the principal penal statute upon which the Land Department has to rely to check the waste and destruction of public timber, its failure to meet the ends desired is a serious matter, and legislation more in accord with the needs of the times should be secured."

Secretary Bliss calls attention to the report of the Commissioner of Pensions, already published, which shows that on June 30, 1897, there were on the pension rolls 976,014 names, an increase of 5,336 during the year. Of these there were 16 widows and daughters of revolutionary soldiers, 7 survivors of the war of 1812, 281 widows of soldiers of that war, 18,994 survivors and widows of the Mexican war, 6,661 survivors and widows of Indian wars, 663 army nurses and 438,064 survivors and widows and children of deceased soldiers and sailors of the war of the rebellion. The latter number represents those pensioned on account of disabilities or death resulting from army and navy service. The number of persons remaining on the rolls June 30, 1897, who were pensioned under the act of June 27, 1890, which allows pensions on account of death and disability not chargeable to the service, was 508,799.

The number added to the rolls during the year was 54,072, the number dropped from various causes was 41,122, and the number of claims of various classes disallowed was 76,234. The amount disbursed for pensions during the year was $139,799,242.12, exceeding the amount disbursed during the fiscal year 1896 by the sum of $1,584,480.18. During the year 994,454 pension certificates were issued.

The Secretary indorses the recommendation of Commissioner Evans for the passage of a law providing that no pension shall be granted to the widow of any soldier who shall hereafter marry. As to the status of pension claims generally, he says:

"There are about 200,000 pension claims awaiting adjudication, and it is estimated that 40 or 50 per cent thereof will be finally admitted. If these claims are rapidly adjudicated, they will swell the pension roll from $5,000,000 to $7,000,000.

The receipts of the Patent Office during the fiscal year exceeded the expenditures to the amount of $317,135.05, and the money covered into the Treasury from fees in patent cases from July 4, 1836, when the office was created, to June 30, 1897, in excess of the amount expended, reached the sum of $5,093,614.23. A greater number of applications for patents were filed during the year 1896 than in any previous year in the history of the Patent Office, and yet the number filed during the first six months of 1897 has exceeded by more than 7 per cent the number received in the first half of 1896. From January 1, 1897, to June 30, 1897, there were filed 25,559 applications. During the same period the total receipts of the office were $722,897.47, a gain of $102,015.50 over the six months immediately preceding. These figures are used as a basis for a recommendation for increased clerical force and office accommodations.

THE AMERICAN BEET SUGAR INDUSTRY.

(Continued from page 323.)

To sum up, then, nearly seventy years of experiment in the beet sugar manufacture in the United States has brought the industry to such a point that we can produce in one year only enough to supply the nation's requirements for about a week. Europe, on the other hand, long ago began to export beet sugar, Germany alone sending us last year some 800,000 tons, or about twenty times our home production. That we have not made better progress in so long a period is due to no climatic obstacles. We have a sugar beet belt stretching from ocean to ocean and of no mean width, inferior in few parts to Europe and in some sections surpassing its most favored beet districts in both soil and climate. The early failures must therefore be ascribed to a want of thoroughness on the part of the pioneers, due to inexperience and a lack of sufficient capital. Theirs was no easy road to travel, and it would have been nothing short of marvelous had they succeeded in securing an immediate foothold for a new manufacture and an untried crop.

This applies to all the failures recorded down to 1890. The plants were not only located unwisely, but were too small to be successful even without that drawback. Since then two factories have been thoroughly unsuccessful. The one at Staunton, Virginia, was destroyed by fire after it had been operated on a small scale, and made a very little raw sugar, and the one at Menominee Falls, Wisconsin, was not completed until toward the end of last winter, by which time the siloed beets, none too rich in the beginning, had so deteriorated in sugar content that they could not be worked up with profit, and the result was the failure of the sugar company. Neither one of these failures however, is any proof that the States of Virginia and Wisconsin are unsuited for sugar beet culture. On the contrary, experiments with the crop in various points of these States indicate that they both have desirable sections for the establishment of beet sugar factories, but any resumption of the industry must be on a larger scale, with enough capital behind the scheme to tide over the agricultural uncertainties of the first year or two. Of the other plants mentioned, none can be called a distinct failure, because they are still running, although some of them have not been as profitable as was expected when they were built. All of them had their trials at the start, and it may be said that for some years to come the first campaign or two of a new factory will not be free from tribulations of one kind or another. The oldest of them, which is operated by the Alameda Sugar Company, at Alvarado, California, achieved success only after a long uphill struggle occasioned by lack of capital and the difficulties of establishing a new branch of agriculture in a country only partially developed. Those behind the project chose their location wisely, and to this choice and their close study of the situation of the industry must be attributed the stable foundation of beet sugar manufacture in this country. Coming later, as it did, the Watsonville factory, which was recently purchased by the American Sugar Refining Company (at a figure said to be 300 for the capital stock), had its way in a measure paved for it, but still had its pioneer work to accomplish. The next plant to be installed, that of the Oxnard Beet Sugar Company, at Grand Island, Nebraska, profited in a measure by the work of its predecessors, and yet, with the untried prairie to conquer, it had obstacles that were unique. This and the one built by the Norfolk Beet Sugar Company, at Norfolk, in the same State, a year later, have had on the whole unprofitable careers, though each succeeding season has undoubtedly brought them nearer to the desired goal. Drought, excessive rains at the wrong periods, the failure of both the State and nation to redeem promises of protection by bounties, and the inability during the earlier years to convince the farmers that beets could be grown profitably at the prices offered—all made the progress of the industry in Nebraska exceedingly uphill work. The Chino factory, built by the Chino Valley Beet Sugar Company, also suffered from drought and the loss of federal bounty and was obliged to endure bad seasons before it attained the great prosperity that ultimately came to it. At Lehi, the plant of the Utah Sugar Company likewise failed to profit long by the McKinley bounty, and while drought was conquered by irrigation of the crop, the use of water at first made the beets somewhat low in sugar and purity. However, an American-built factory that could be run economically, very conservative management and the co-operation so characteristic of the Mormons, have made the course of this factory perhaps the smoothest of all. It certainly has lost nothing, even if it has not made a fortune in the six campaigns of its history. Comparatively smooth, also, has been the brief history of the plant of the Pecos Valley Beet Sugar Company, at Eddy, New Mexico. It probably had the least unsuccessful first campaign of any of our beet sugar factories, irrigation securing for it a fair sized crop of extraordinarily rich beets that but for the difficulties encountered in working it up would have realized a handsome profit. So then, to sum up the general history of the sugar beet in the United States, whatever failures there are to record may be set down to the natural obstacles that lie in the path of any new industry of such great magnitude and importance, and, far from impeding its progress, have helped to place it on a sounder basis. To-day beet sugar manufacture in this country is an established success, even if—as has been stated—nearly seventy years of experiment have given us but nine factories to work up this season's crop.

As for the future, what with the protection that the Dingley act gives sugar, and the growing desire of farmers to familiarize themselves with the culture of the sugar beet for manufacturing purposes, it is full of hope. It would be more than desirable to have this country eventually produce all the sugar that it consumes, and it is because of the possibility of some time bringing this about that the new industry is looked upon with the greatest favor and interest; for, with the cane belt so restricted to a few States that it may never have an annual output of more than a quarter of our present consumption, everything depends practically upon the sugar beet. Allowing for the cane crop of the Southern States and Hawaii (the latter must be included, as it enters free of duty), we should require some 350 beet sugar factories, each with a daily capacity of 500 tons of beets, to manufacture the sugar that we now import; and, considering the rapid growth of this nation, before the erection of so many expensive plants could be brought about, it can readily be seen that there will be little danger of over-production for years to come. Thus far, California has shown the greatest development. Its four factories will, this season, turn out about two-thirds of all the beet sugar made in the United States, and, if the various projects in the air materialize, another year will see an immense increase in the output of this State.

Claus Spreckels is building at Salinas a plant which it is claimed will have a daily capacity of 3,000 tons of beets, thus exceeding by about 500 tons the largest one in Europe. Rumor has it also that one of the sugar king's sons is about to build a big factory, and that still another for both beets and Hawaiian raw sugar will go up at Crocketts.

The special advantages of California are several. In the northern part, where the Watsonville and Alvarado plants (both within 100 miles of San Francisco) have shown the best average results thus far obtained in this country, the soil and climate possess not only the best qualities of Europe—excellent beets growing hand in hand with very high tonnage—but it is surpassed in one important respect, the short winter season permitting planting to be distributed over a long period and harvesting prolonged, without danger of killing frosts.

Southern California makes even greater claims for superiority. It has a wealth of sunshine, considerable moisture from sea and mountains, and a goodly store of subterranean water, but is not drought-proof, and may eventually be obliged to irrigate certain of its lands. However, six years of work at Chino have proved the possibility of raising big crops of rich beets there in an average season, and that the wiseacres who insisted that proper culture was practicable only in a temperate climate were greatly mistaken. Therefore, unless other difficulties arise, the Chino and Los Alamos plants—each 30 odd miles from Los Angeles—are the nucleus of what is destined to become a big sugar producing district.

Meanwhile, New Mexico is running after California's laurels. Last season, at Eddy, the average sugar and purity of the beets were unprecedented, and with abundant water supplies for irrigation purposes and sunshine 300 days in the year, the pioneer manufacturers in that territory firmly believe that they have found the ideal section of the United States for beet culture.

A new 500 ton plant is talked of at Roswell, 75 miles north of Eddy, and as soon as the country thereabout becomes a little more thickly populated, there is every reason to believe that beet sugar will be a staple product of New Mexico.

In Utah further development will probably be quite slow. There is plenty of land in the valleys, and that irrigation would render suitable for beet culture, but lacking, as it does, the continued sunshine of the South, it is still questionable whether the application of water in this way can be so regulated as not to keep the sugar and purity down to a rather low point.

Nebraska, also, is not likely to show rapid or immediate progress in the industry. Drought and the lack of sufficient surface water to make irrigation practicable debar a considerable portion of the State from profitable agriculture, and, while eastern Nebraska has some very fine sections of land that in a normal year can be depended upon for crops that will compare favorably with Europe, the general results have not been good enough to warrant anything but most cautious progress. Two of the most desirable sites are now looking for a factory, and if such a one were built of not less than 500 tons capacity, it could, without doubt, be made to pay well.

To sum up, therefore, the future of the industry in California and New Mexico is quite rosy; in Nebraska and Utah it is somewhat problematical, though by no means dark; while New York, being about to engage in its first practical test, is as yet hardly a fit subject for prophecy. It may be said in its favor, however, that it seems to have an abundance of good beet land, climatic conditions that are all right, if rains are not too heavy at harvest time, a class of farmers that are more used to the intense culture that the beet requires than those west of the Mississippi, and, lastly, very cheap coal and other important supplies.

So far as other States of the Union are concerned, several of them promise well, judging by the reports from agricultural experiment stations and test patches of farmers—Iowa, Minnesota, Michigan, South Dakota, Indiana, Colorado, Washington and Arizona having shown very satisfactory analyses. None of these, however, is likely to enjoy any immediate boom as a sugar State.

The eyes of capitalists are, for the present, turned upon California and New Mexico, and until they have their quota of beet sugar factories, it looks as if the progress of the industry in other States would be slow, unless local capital takes the thing in hand, as has been the case in Utah and New York. In other words, while the industry is bound to develop, and develop with as great rapidity as proper caution will allow, the capitalist who has half a million dollars or so to invest in a beet sugar plant will naturally choose what seem to be the most favored spots, so long as they last, and profit by the pioneer work of others, rather than undertake it himself.

© 1897 SCIENTIFIC AMERICAN, INC.

AN IMPROVED GAS BURNER.

The illustration represents a gas burner provided with an automatic gas stop or cut-off, whereby, should the light be accidentally extinguished or blown out, the cut-off will immediately stop the flow of gas. It is also provided with a controller to gage the size of the light, and means for locking the fixture so that it cannot be used for unauthorized purposes. The improvement has been patented by Horace W. Billington, of No. 565 Jersey Avenue, Jersey City, N. J. The base of the burner is spherical, on this portion being

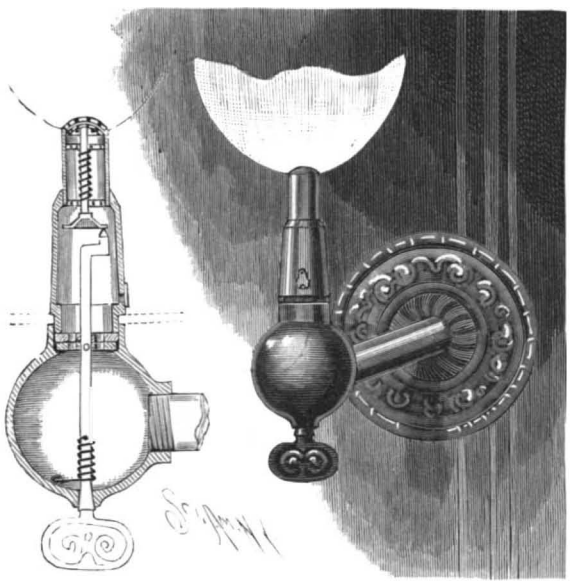

BILLINGTON'S GAS BURNER.

screwed a neck, with which the tip is removably connected, the hollow base where the gas first enters forming a receptacle to receive and hold all impurities, which may be cleaned out occasionally through an opening at the bottom. In the portion of the neck which joins the lower part of the burner is a fixed perforated disk, whose openings correspond with similar perforations on a lower revoluble disk on a rod or key, on whose lower end is a turning knob, while on the upper end of the rod is a crank whose upright member is finely pointed, and adapted to engage one of several apertures in a locking disk, as indicated in the sectional view. A spring attached to and coiled around the key rod is also attached by its other end to the inner surface of the hollow base. In the lower portion of the tip is secured a spider, through which and through an upper guide spider a hollow rectangular copper rod extends upward to the inner face of the burner tip, where it is connected with the apertured cap, a spring around the rod bearing against the two spiders, and the lower end of the rod being connected with the apertured locking disk, preferably made of steel. When the key is turned to bring the cut-off disks in registry and the gas is ignited, the copper rod is expanded, bringing the locking disk downward, so that the fine point of the crank arm of the key rod will enter one of the apertures of the disk, and the key will thus be held open, the locking disk thus also forming a controller to gage the flow of the gas. Should the flame be accidentally extinguished, the cooling of the copper rod and its consequent expansion, assisted by the spring within the tip, causes the lifting of the locking disk and the freeing of the key, when the cut-off disks move to non-registering positions, and prevent the further flow of gas. Provision is made to lock the fixture against unauthorized use, by means of a spring and a corresponding opening in the meeting faces of the cut-off disks, it being thus possible to turn the lower disk by means of the key to a locking engagement, such lock being released by passing a rod of the necessary shape through an opening in the neck portion of the burner to depress the spring.

AN IMPROVED AUTOMATIC WEIR.

The illustration represents a weir arranged to open and close automatically according to the amount of water passing down the waterway, to always retain the desired amount of water and permit a ready discharge of the surplus. Between suitable side abutments, and on top of a foundation in the bed of the waterway, are secured longitudinal I beams, the space between being filled in with cement or concrete, and on each of the beams a vertical rib is fastened by angle irons. A series of gates extend across between the abutments, rearwardly inclined and normally resting with their lower edges on the bottom of the weir, each gate having in its lower portion one or more slots adapted to straddle the vertical ribs. The gates are mounted to swing at the rear on a series of curved rider plates, one of which is shown in Fig. 2, these rider plates being bolted to opposite sides of each vertical rib, and there being also on top of the ribs horizontal angle irons, forming a rest for the gates when they curve from a vertical to a horizontal position. On the back of each gate is a reinforcing plate, adapted to ride on the rider plates, and the gates carry keepers, which inclose the rider plates, preventing the accidental displacement of them. If the height of the water to be retained is equal to the height of the gates, they press, with about one-third of their height from the bottom edges, against the rider plates, as shown in Fig. 3; and if the height of the water increases beyond the limit, the pressure on the upper portion of the gates causes them to turn on the rider plates, the gates opening proportionately to let one-half of the surplus water over the top edges of the gates and one-half under the bottom edges, as shown in Fig. 1. The gates change their resting point on the rider plates, moving upwardly and rearwardly, according to the pressure of the surplus water, and when this has been discharged and a normal pressure again prevails, the gates return to their first position.

To facilitate opening the gates when water is not desired, their upper ends are connected by chains with drums on a transverse shaft at the rear, the shaft having at one end a bevel gear with a worm on a vertical shaft to be turned by a handle. The several drums are locked to the shaft by clutches, which may be moved into and out of engagement with the drums by transversely sliding rods connected with a link under the control of a gateman on one of the abutments. When the gates move to a horizontal position, hooks on their upper ends engage pins on the vertical ribs, and the hooks may be disengaged by rods sliding on the ribs, and pivotally connected with arms on a shaft in brackets attached to a runway or gang plank, extending from one abutment to the other in the rear of the gates, one end of the shaft having a lever, by which the gateman may simultaneously throw the several hooks to unlock the gates and return them to the normal upright position. The main principle in the construction of this weir is that it is designed to retain the water to the full height of the gates when the pressure is in equilibrium, the weir commencing to discharge when the water rises above this point. The point of support of the gates changes according to the height of the water, and the gates come back again to their lowest resting point on the rider plates when the excess of water is discharged.

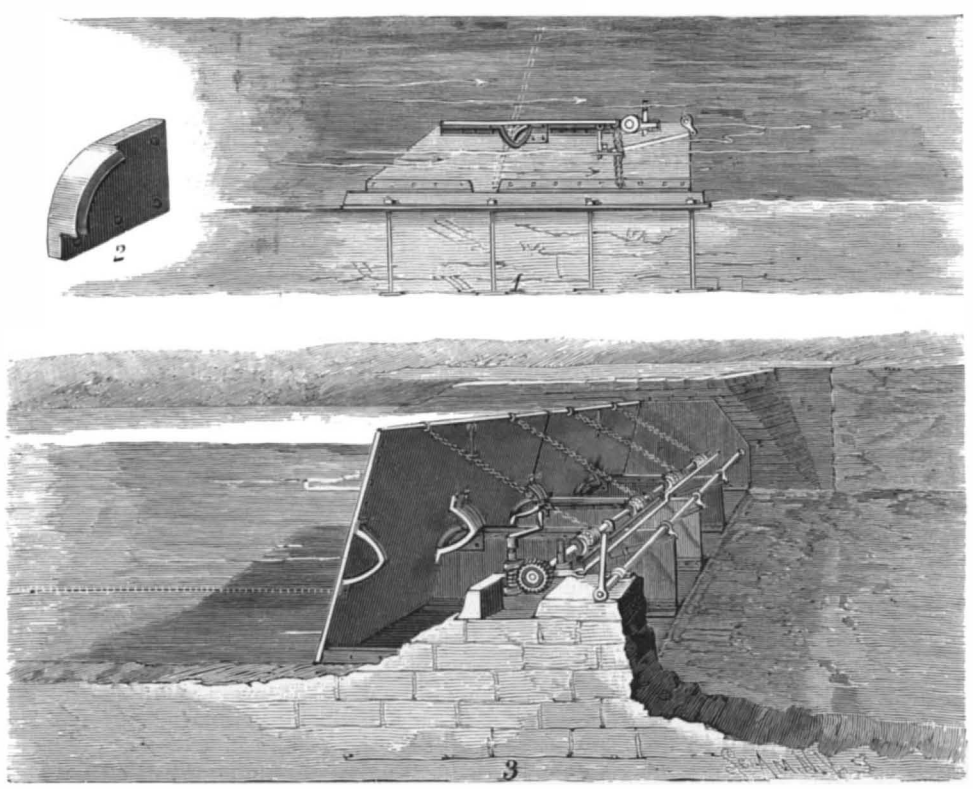

FUCHS' IMPROVED AUTOMATIC WEIR.

This improvement has been patented by Mr. G. Ludwig Fuchs, of Meiningen, Germany, and further information relative thereto may be obtained through Mr. Ernesto Fuchs, Ciudad Lerdo, Mexico. The construction of the weir is especially adapted for streams, rivers or creeks where water is to be retained to a certain level for hydraulic power or for irrigation purposes. It is also designed for use in rivers where large amounts of ice or floating obstructions may injure a weir, in which case it is provided in front of the ribs with a grate that allows the gates to perform their action without allowing any obstructions to go underneath the lower part of the gates, but forcing such obstacles to go over the weir without causing injury to its construction. Where sudden floods come, the gates work automatically to release the surplus water without the supervision of a gateman, and the practical working of the weir is designed to keep the river bed clean, as in floods all the sediment, which would accumulate before a dam made of mason work, is carried down.

A COVER FOR MUCILAGE RESERVOIRS.

The appliance shown herewith is especially designed for use with bottles having a vacuum reservoir within which the liquid is retained by air pressure, a fount or cup being connected with the reservoir by a passage at the bottom. The improvement has been patented by Truman S. Lewis, of Waterbury, Conn. (Box 823). The larger view shows the device with the cover thrown back, the small figure showing it in section with the cover closed. A connecting passage opens from the bottom of the reservoir into a well or cup in front, and the cover is pivoted to a band which surrounds the lower portion of the bottle, the lower portion of the cover having a projecting arm to engage the side of the bottle, and keep the cover from being thrown too far back. On the inside of the cover is an outwardly extending downwardly bent arm carrying a small bucket or cup, which is immersed in the mucilage when the cover is down, and on the inner side of the reservoir is a groove adapted to receive the handle of a brush placed in the cup. When the cover is thrown back, as shown in the main view, this cup then acts as a brush wiper, but when the cover is closed the brush is kept constantly immersed, with the cup, in the mucilage, so that the evaporation is not great, and the brush and its supporting cup are constantly kept moist, preventing the edges of the reservoir and brush from becoming gummed up.

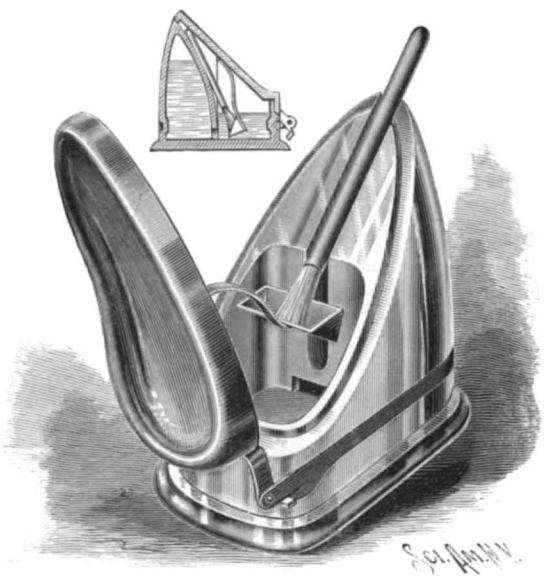

LEWIS' COVER FOR MUCILAGE RESERVOIRS.

The World's Production of Coal.

The following table has been compiled by Dr. E. W. Parker, of the United States Geological Survey, giving the coal output of the principal countries for the years nearest 1896 for which figures could be obtained. The table will appear in the Report of the Survey for 1896. The long ton is, of course, 2,240 pounds and the short ton 2,000 pounds.

Country.	Usual unit in producing country.
Great Britain (1896), long tons	195,361,260
United States (1896), long tons	171,416,390
Germany (1896), metric tons	112,437,741
France (1896), metric tons	29,310,832
Austria-Hungary (1895), metric tons	32,654,777
Belgium (1895), metric tons	21,213,000
Russia (1896), metric tons	9,079,138
Canada (1896), short tons	3,743,034
Japan (1893), short tons	3,400,000
India (1895), long tons	4,441,890
New South Wales (1895), long tons	3,737,536
Spain (1896), metric tons	1,878,399
New Zealand (1894), long tons	719,546
Sweden (1895), metric tons	223,652
Italy (1895), metric tons	305,321
Transvaal (1895), long tons	1,152,206
Queensland (1895), long tons	322,977
Victoria (1895), long tons	194,171
Natal (1895), long tons	153,951
Cape Colony (1895), long tons	87,985
Tasmania (1895), long tons	36,856
Other countries	2,000,000
Total in English tons	589,732,000
Percentage of Great Britain	33·1

The total under "other countries" includes China, Turkey, Servia, Portugal, United States of Colombia, Chile, Borneo and Labuan, Mexico, Peru, Greece, etc.

© 1897 SCIENTIFIC AMERICAN, INC.

MOULDS FOR SOLDERING PIPES.

The apparatus represented in the accompanying figure consists of a bronze mould formed of two pieces opening through a hinge, and which is fitted either horizontally or vertically to the extremities of the two lead pipes that it is desired to solder together. For vertical pipes a special hopper is provided. It is necessary to scrape and carefully prepare the extremities of the pipes to be united. Then the mould is heated and fixed to the latter. After this the molten lead, which has been raised to a red heat, is poured in. In this way there is obtained a very clean joint without any burrs. It is to be remarked that only lead is employed, instead of the soft solder used with the soldering iron and lamp.

These moulds, due to M. Tye, permit of soldering more rapidly and surely than with the ordinary process, and of effecting a considerable saving, resulting from the difference in the cost of the material and diminution in manual labor. These apparatus are made in several series, varying according to the external diameters of the pipes. They can be arranged for uniting pipes of different diameters and for soldering two pipes at right angles, and either horizontal or vertical.—La Nature.

BORING OIL WELLS AT SEA.

The early settlers in California were familiar with the indications of oil, which were common at various localities up and down the coast, and the asphaltum from beds in the sea, where this product oozed up out of the bottom, formed an important factor in the household economy of the ancients. In almost every burial place on the coast asphaltum is found. The natives employed it to mend objects which were broken, and as a base in which to place ornamental pieces of pearl mosaic; baskets were fastened to ollas by this means, and it was used for endless purposes in lieu of nails, cordage and glue. The natives on the islands obtained their supply from the water, and today the rocks at various places can be seen splashed with asphaltum which has drifted in. This is particularly noticeable after an east wind, showing that there is a large area in the deep Santa Catalina channel from which asphaltum oozes up. Off Redondo Beach, Los Angeles County, it is extremely troublesome, oozing out of the sand offshore and drifting in. Between Santa Monica and Los Angeles there are undoubted deposits, and north of Santa Barbara several enormous ones. That owned by the More estate extends some distance alongshore, so that vessels run in and the asphaltum is shoveled aboard. The quality, it is said, is quite equal to that of the famous Trinidad variety.

At Santa Paula, oil wells were long ago developed, and later the oil-producing belt was found at Puente, and again at Summerland, below Santa Barbara, where a singular state of affairs may be seen. That the oil-bearing strata reached out into the ocean soon became apparent at Summerland, and the drill scaffoldings, looking like windmills without the wheel, began in a short time to extend down the little cañon which they had filled and to creep up the shore in the direction of Santa Barbara. At first, as shown in the accompanying illustration, they kept along the sides of the hills which breast the ocean here, but gradually they turned seaward, until one more adventurous than the rest rose from the water. The work was started at extreme low tide, and finally the tall scaffolding appeared twenty or thirty feet from shore, seemingly rising from the sea.

The illustration shows the location of three wells, which at low tide are in the water and at flood tide are

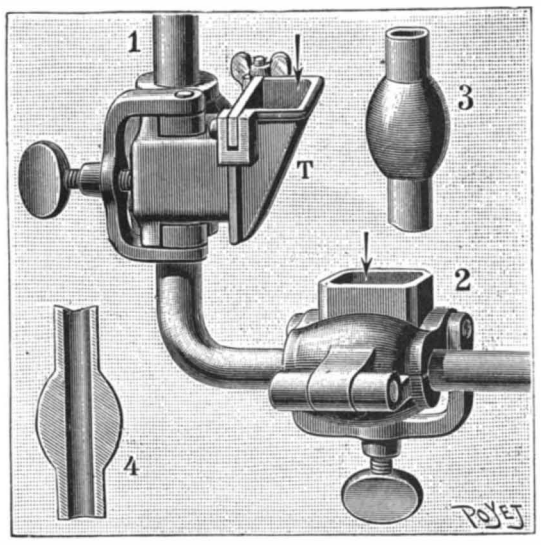

MOULDS FOR SOLDERING PIPES.

completely surrounded, the men working on platforms of various heights which they ascend when working as the sea rises. The structures that are built in the sea have not yet experienced a strong southwester, and it is assumed by some that there will be a fall in oil when a heavy sea begins to break against the scaffolding. The drill is worked in the water by an engine on the beach, the fuel being the oil pumped up; this engine working several wells. At present the most daring well scaffold stands in six feet or more of water at high tide, and there is rumor that others will be pushed out into the shallow water near the kelp beds. This is probably the only place where oil is pumped out of the ocean. Undoubtedly the entire coast in this vicinity overlies an oil-producing stratum. Off what is known as More's wharf, half a mile out, oil rises to the surface in several places. A spring of water also rushes up here with such velocity that it can be taken up and used if one does not mind a slight intermixture of salt. A similar spring is known on the Florida coast, where it it is said that a vessel can lie alongside the great rush of water and fill her tanks with fresh drinking water out of the ocean.

Probably one of the most extraordinary sights of oil wells is seen in Los Angeles. Oil was first discovered in the west portion, in what was considered a choice residence part of the city, but like magic the lighthouse-like scaffoldings began to rise until the land appeared fairly to bristle with them. Fine residences were ruined by the proximity of the unsightly objects, and, finally, the section was given over to them, and now resembles certain sections of the oil region in Pennsylvania. See the SCIENTIFIC AMERICAN for July 17, 1897.

The wells have advanced in a well defined tract in a northeasterly direction, and at present appear to be stopped by the large Catholic cemetery, which overlies the oil-producing strata. Not far distant is the Los Angeles River, which probably will ultimately be encroached upon and made to give up its hidden riches.

The discovery of oil in and about Los Angeles bids fair to revolutionize certain lines of business, and promises to produce the long wished for power for manufactories. The Terminal Railroad has adopted the oil as fuel, and the Southern Pacific is said to be experimenting in the same direction.

California is without deposits of coal, if we except lignite beds, which crop out in various places, so that oil, as fuel, will supply a long felt want, and become a factor in the rapid development of this growing city.

Reported Discovery of Strontium.

The discovery of a large bed of strontium at Put-in-Bay Island, reported from Toledo, has awakened a considerable amount of interest among the manufacturers of fireworks, as it is thought likely that it will result in a considerable reduction in the price of all fireworks in which strontium nitrate or strontium carbonate is used. One large manufacturer of fireworks in New York, who makes use of about one hundred and fifty tons of strontium nitrate in a year and imports the whole of it from Europe, states that it costs his firm now about seven and a quarter cents a pound. If the strontium should be found in large quantities, it would have the effect of lowering the cost of certain classes of fireworks, that is, all those that use a red or crimson light. At present the supply comes chiefly from Germany, and the American manufacturer has to pay a high price for it.

ON the approach of a thunder storm French peasants often make up a very smoky fire, says Industries and Iron, in the belief that safety from lightning is thus assured. By some this is deemed a superstition, but Schuster shows that the custom is based on reason, inasmuch as the smoke acts as a good conductor for carrying away the electricity slowly and safely. He points out that in 1,000 cases of damage by lightning 6·3 churches and 8·5 mills have been struck, while the number of factory chimneys has only been 0·3.

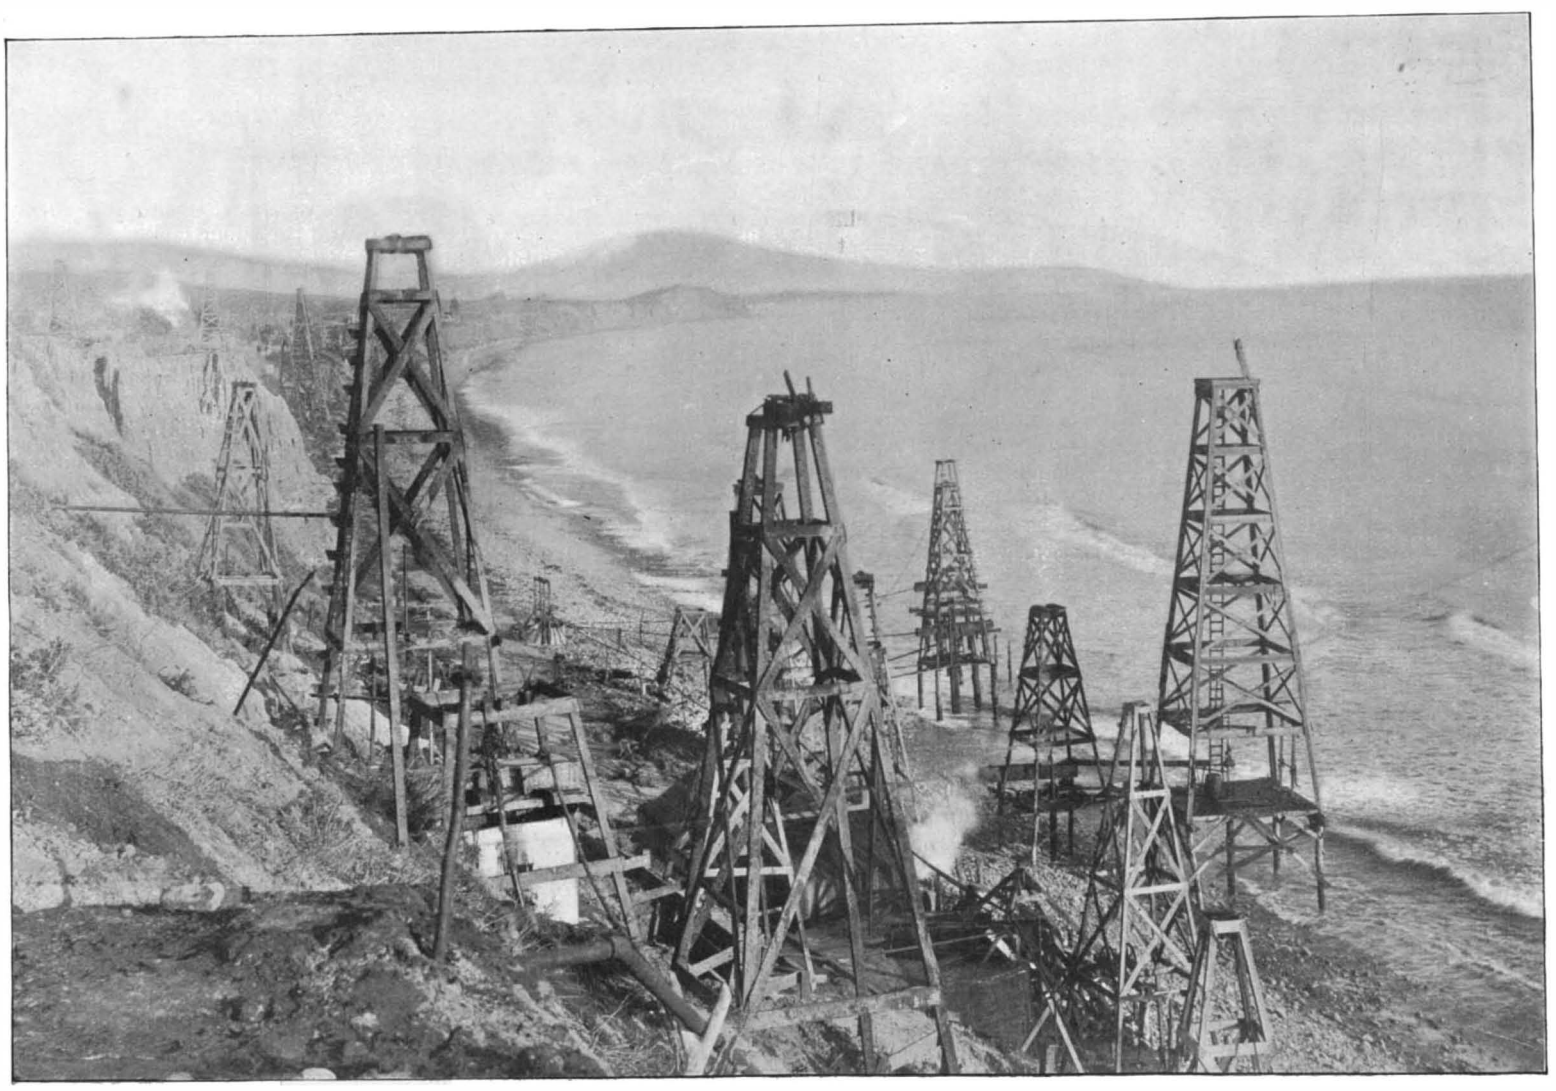

OIL WELLS ON THE SEA SHORE NEAR SANTA BARBARA, CALIFORNIA.

© 1897 SCIENTIFIC AMERICAN, INC.

LENGTHENING A HUDSON RIVER STEAMBOAT.

(Continued from first page.)

freight, have no sleeping accommodation, and are built with the sole object of giving the traveler a swift passage with every possible facility for seeing the beauties of the Hudson River. As compared with the night boats they sit low in the water, and one misses the towering superstructure, the dining saloons, parlors, etc., being all contained on the main and upper decks. They are distinguished by the extreme fineness of their lines and a general rakish and yacht-like appearance that is not belied by the speed of 23 miles an hour of which they are capable under favorable conditions.

The twin boats of the Albany Day Line were built with the object of enabling the tourist to leave New York at a reasonable hour in the morning and reach Albany in the early evening; or, should he prefer it, to make the round trip between New York and Poughkeepsie between nine in the morning and half past five in the evening. As the distance is 150 miles, and the current varies from one to two and a half miles an hour and seven different landings have to be made en route, the actual speed of these boats has frequently to be maintained at 20 miles an hour to enable them to make the run within the nine hours. This large reserve of power enables them in cases of emergency or delay to run up to 23 miles an hour, and herein lies the secret of the remarkable regularity with which the landings are made. This is seen at Poughkeepsie, where the passengers that are making the round trip are timed to land five minutes before the arrival of the return boat from Albany. The transfer is made with unfailing regularity.

The New York, which forms the subject of our front page illustrations, was built in 1887 at the yards of the Harlan & Hollingsworth Company, Wilmington, Del. Her dimensions are as follows:

Length on water line	301 feet.	
Length over all	311 "	
Breadth of beam, moulded	40 "	
Breadth of beam, over guards	74 "	
Depth, moulded	12 "	3 inches.
Draught	6 "	
Tonnage (net 1091·81)	1,552	

The hull is built of iron, and everything was done to cut down the weights and secure the light draught which is necessary for running at high speed over the shoals of the upper river. The frames, which are spaced 2 feet apart, are 4 inches by 3 inches by 7-16 inch; the reverse bars are 2½ inches by 2½ inches by 5-16 inch; the stringers are 4 inches by 3 inches by ⅜ inch, and the floors 16 inches by ⅜ inch. The shell plating is ⅜ inch throughout, except the sheer strake and garboards, which are ½ inch and 7-16 inch respectively. The hull is divided into four watertight compartments by bulkheads, which extend to the main deck and are free from doors or passageways, the compartments being entered by stairways from this deck. The boat is driven by a standard American beam engine of 3,850 horse power, with a cylinder 75 inches diameter by 12 feet stroke, provided with a Stevens cut-off. The 30 foot paddle wheels are of the "feathering" type, in which the steel buckets enter and leave the water perpendicularly, and thereby avoid that beating of the water which, in wheels of the radial type, at once absorbs much of the engine power and sets up an uncomfortable vibration in the boat. Steam is supplied by three return-flue boilers 9¼ feet diameter and 33 feet long.

As the boat is designed for giving full opportunity to see the beauties of the river, the saloons and private parlors on the main and upper decks are liberally supplied with glass, the partitions between the windows being kept down to the lowest practicable limit. A special feature, borrowed no doubt from the railroad observation car, is a set of private observation parlors, located just forward of the paddle boxes, the fronts of which consist of large plate glass bay windows, which reach from the ceiling almost to the floor. Taken altogether, the New York, with its long unbroken lines of hull and superstructure, its double row of continuous plate glass windows, its shapely paddle boxes, and its pale, buff-colored smokestacks standing three abreast, is as dainty and picturesque a piece of naval architecture as can be seen anywhere in American waters.

The sister ship, the Albany, which was built in 1880, was lengthened 30 feet during the winter of 1892, and the results were so satisfactory that the company recently determined to make the same addition to the length of the New York. The operation of cutting the hull of a vessel in two, hauling it apart, and building in a new section at the point of division, is a delicate operation that calls for the best skill of the shipbuilder. The Albany was sent down to Wilmington to be lengthened; but it was decided that the local shipyards were quite equal to a task of this kind, and accordingly the New York was taken over to Robins' shipyard at the Erie Basin. Here she was floated into the dry dock and placed upon the keel blocks and bilge blocks in the usual manner. It was decided to cut the hull at a point between the engines and boilers, and the first step was to build launching ways beneath the forward half of the hull, and transfer to it the load that was carried by the blocks. The accompanying diagram, which has been prepared from drawings furnished by the John N. Robins Company, shows in detail the construction of the ways and the rigging of the gear with which the vessel was pulled apart. The fixed ways, which were 10 inches deep by 14 inches wide, were laid upon blocking on the floor of the dock and well shored guide pieces were spiked to the outside of these ways to keep the sliding ways in place. The latter were built of 6 × 14 inch timbers and were tied together with 12 × 12 transverse timbers at regular intervals. The space between the transverse timbers and the floor of the hull was filled in with blocks and wedges, and at the forward end shoring pieces were substituted to accommodate the decreasing width and the taper of the bow. The length of these ways was 102 feet, and they were placed 10 feet 9 inches apart in the clear. At a distance of 3 feet 9 inches on the outside of the main ways, a pair of additional ways were built to take the weight of the boilers. The rubbing surfaces of the ways, which of course were planed and smoothed, were freely lubricated with a mixture of tallow and fish oil. When everything was completed, the wedges were gradually driven home until the weight had been lifted from the keel and bilge blocks and was carried entirely by the ways. The pulling apart of the hull was accomplished by means of four 1⅜ inch chains, a pair of 5 inch manila ropes working in fourfold blocks, and a couple of steam winches located at the head of the dock. A chain was led through the hawse hole on each side at the main deck and wound around four successive bitts so as to secure a thorough distribution of the strain. Just in front of the stem they were lashed together, and made fast to a pair of fivefold blocks. The inshore blocks were connected to 1⅜ inch chains, which were led back through one of the dock buildings and secured to a 12 × 12 stick of timber placed on the outside of the building at the ground level. The falls of the tackles were led to a pair of steam winches. In cutting apart the iron hull, all that was necessary was to cut off the rivet heads and knock out the rivets. This was done in every case at the original butts. The three decks, partitions, guards, and sponsons, were then sawn through and everything was now ready for the pull. At a given signal the forward half of the boat, weighing 350 tons, began to move slowly and steadily forward, and in exactly 5 minutes and 30 seconds it was stopped precisely at the measured mark, thirty feet ahead on the ways. Mr. W. D. Dickey, the superintendent of the Dry Dock Company, stood on the floor of the dock under the bow and directed the enginemen at the winches by signal what was to be done. When the two portions of the boat were lined up with fine piano forte wire, it was found that one side of the bow had to be raised only ⅜ of an inch and the stem jacked over about an inch—a highly creditable result. During the building of the ways, the fifteen frames for the new section of the hull had been made in the shops to model. The work of carrying them into the dock and putting them in place was done by hand, as shown in the engraving. It commenced on Saturday morning, and by noon of the same day the work was in frame. The framing and plating is similar to that of the rest of the hull, with the exception of two additional sister keelsons of ⅜ inch plate, which are spaced about 16 feet apart.

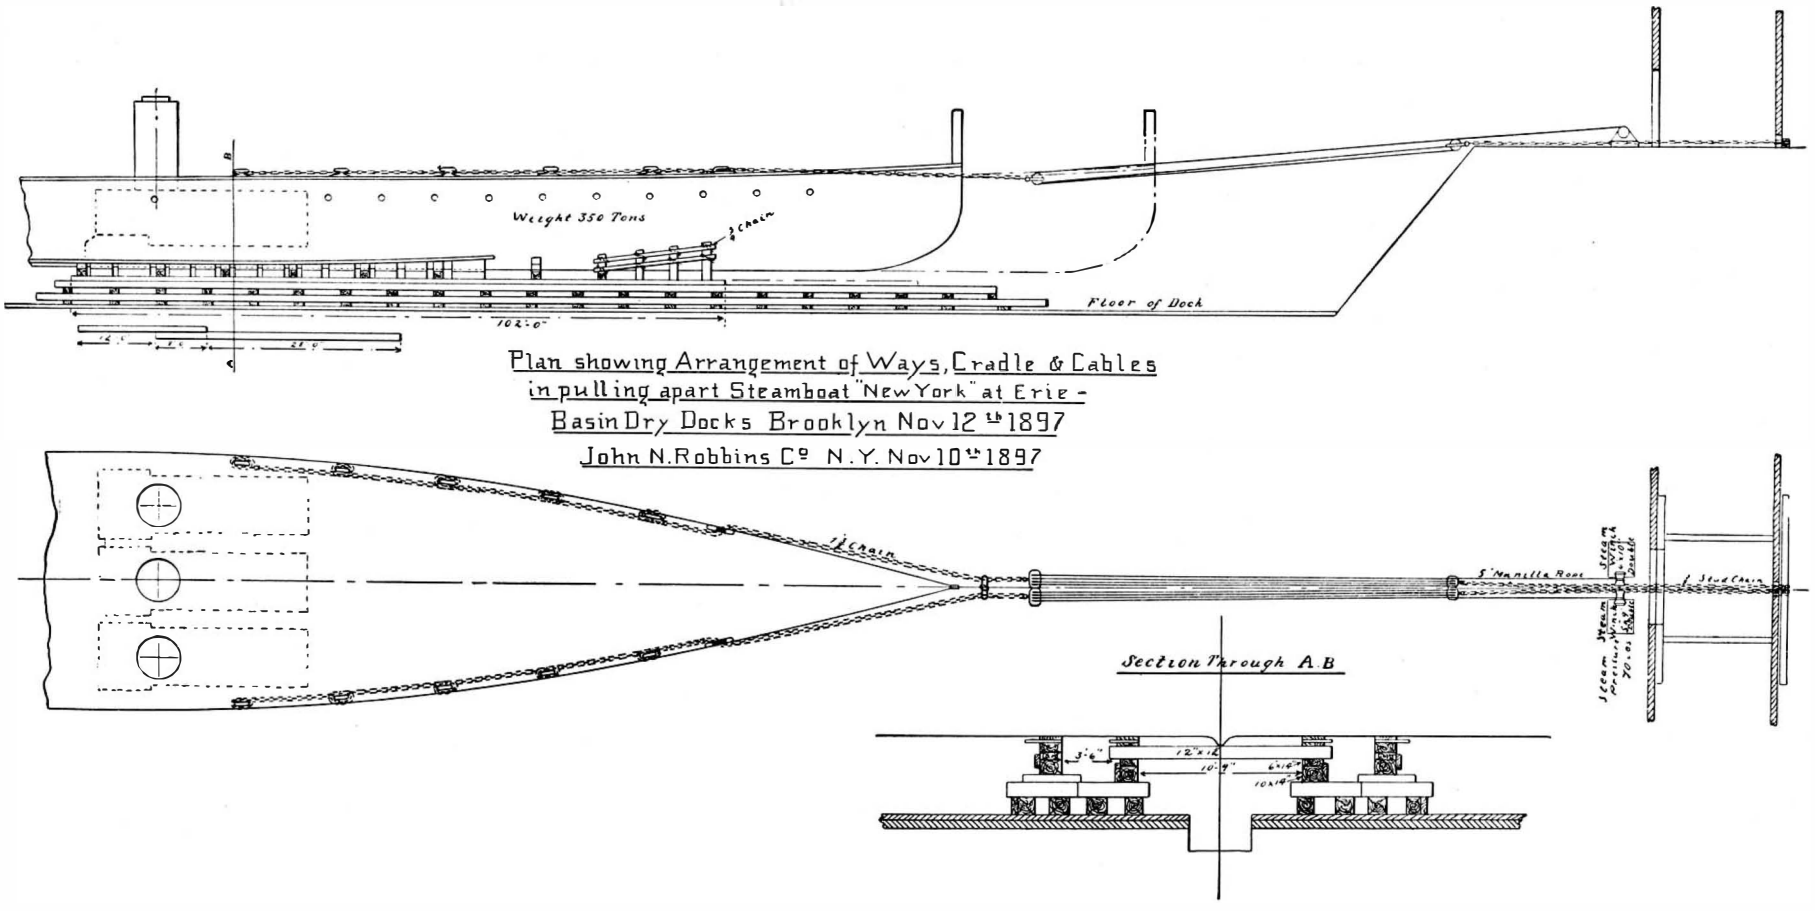

Plan showing Arrangement of Ways, Cradle & Cables in pulling apart Steamboat "New York" at Erie-Basin Dry Docks Brooklyn Nov 12th 1897
John N. Robbins Co. N.Y. Nov 10th 1897

METHOD OF SEPARATING THE TWO SECTIONS OF STEAMBOAT NEW YORK.

The owners of the shipyard are to be congratulated on the rapidity and success with which this novel and difficult piece of work was done. The work of cutting the rivets was started at 1 A. M. Thursday, November 11, and completed that night. The ways were completed by 3:30 P. M. on Friday, and the hull was in frame by noon on Saturday, the total working time being 17½ hours. It is expected that within 15 days from the time the boat was docked, the new hull and the main deck work will be completed.

It is estimated that the additional buoyancy afforded by the new section of the hull will lighten the draught by 5½ inches. This, on a model of such great beam and fine lines as the New York, will give her an easier waterline and will, if anything, increase her speed. However, as the lengthening was undertaken with a view to increasing the passenger accommodation, which at present is 2,500, it is probable that with a larger load the speed will remain at 23 knots with forced draught or 20 knots under ordinary working conditions.

© 1897 SCIENTIFIC AMERICAN, INC.

Correspondence.

Increase of the Artillery Force.

To the Editor of the SCIENTIFIC AMERICAN:

Referring to the article upon sea coast defense in your number of November 13, in which mention is made of the large number of men required to man the guns which will be required, your correspondent begs leave to make the following suggestion:

After retaining at each post the minimum of regularly enlisted men necessary to keep the armament in order, let the full fighting force required be enlisted in the vicinity under the following conditions:

The men to serve, with pay, for a stipulated time each year, during which time they will be instructed in their duties. During the remainder of the year, except in time of war, the men to remain at their homes, without pay, subject to call when needed.

By selecting the time of service when little labor on the farm is required, an abundance of the very best material would be secured, men who would be glad to remain in the service for years, and who would be available at any time on a day's notice.

Such a force would be brought under the best possible influences for making them do their duty gallantly, for they would be fighting directly in defense of their homes under the very eyes of their friends and neighbors.

While the efficiency of this service would be equal if not superior to any other, the cost would be far less, and the money expended would go into the pockets of thrifty, worthy people, where it would do the country some good.

A similar plan is now followed in the life saving service, the men serving, on pay, for certain months of the year only, and where could a finer body of men be found than these? WM. W. BLACKFORD.

Lynnhaven, Princess Anne County, Va.

Organized Arctic Exploration.

To the Editor of the SCIENTIFIC AMERICAN:

In the number for September 25 of your valued paper I find a note on Mr. W. Wellman's proposed polar expedition.

Mr. Wellman's plan in so far coincides with what I have long considered to be the only rational solution of this problem that I am encouraged to offer a few general suggestions that may, perhaps, elicit a broader discussion of this interesting subject.

I quite agree with Mr. Wellman that up to this time all attempts to reach the north pole were dashes. Therein, in my opinion, lay the ultimate cause of their failure. I am certain that if half the energy, patience and money spent in organizing polar expeditions in this century had been applied to systematic advance, the north pole would have been reached many years ago. I shall not spend time in analyzing the psychical motives that led Franklin, Dr. Kane, Peary, Nansen and all the host of polar explorers to prefer individual feats of nearly superhuman exertion to a steady and, possibly, international action in this direction. Very probably the main reason can be found even in Mr. Wellman's words: "I am eager . . . to plant the American flag," . . . etc. The world at large has gained very little by following this plan, and many brave men and valuable lives have been sacrificed without any real necessity.

When we come to think quietly over the matter, it is difficult to see any necessity in reaching the north pole at a jump. In all probability, if even the jump is successful, the happy individual who succeeds in alighting on the spot "whence there is no direction but south," will be so utterly exhausted by the terrible strain of his feat that he will have no more energy left for steady exploration and observation that can alone be of any real use to science or humanity. All the remnant of his courage and physical endurance will necessarily be employed in attempting to jump home again.

Mr. Wellman's plan seems to me the first step in the true direction; unfortunately, I see in the plan as it now stands two elements that can bring on failure where success should be certain. One of these elements is haste and the other national and personal egotism. If, instead of fixing a term of three years, Mr. Wellman had not put any limit to his work, and if, instead of packing up only the gallant "stars and stripes," and refusing "public subscription and universal consent," he would take the international flag "Excelsior" and accept both universal subscription and universal consent, his ultimate success would, I am confident, be a matter of certainty and not of doubt. Private means and private energy may, certainly, cover the expenses and furnish the exertions of founding two or three supply stations and undertaking a three years' expedition toward the pole, but they can hardly suffice to bring that enchanted spot within the reach of continuous scientific research.

I think that the north pole should be and can be reached only by a continuous chain of stations, placed "not two or three degrees," i. e., 30 or 45 geographical miles, apart, but within an easy day's journey from each other; say at a distance of 15 or 20 kilometers. At intervals of a week's march, say at every 100 or 120 kilometers, a large depot should be constructed, where a party of 10 or 12 men and 60 dogs could live comfortably for months at a time, if necessary. The intermediate stations could be much simpler equipped, and consist of a warm shanty, with a sufficient supply of provisions and fuel to allow a party to stay over a blizzard or even a few days of exceptionally inclement weather. All the stations should be connected by a telephone line, made strong enough to insure continuous service. This line would serve also as a guide rope from station to station.

If the point of departure be Cape Flora, as proposed by Mr. Wellman, ten degrees from the pole, or about 1,200 kilometers, ten large depots and fifty smaller stations would bring the pole into constant communication with America or Europe, provided Cape Flora can be regularly reached by shipping. If not, one or two intermediate large stations should connect Cape Flora with some open port.

The cost of such a "road to the pole" would certainly be very considerable (some of the stations may possibly have to be solidly constructed house boats, heavily anchored in the open sea), but that cost will scarcely be greater than that of a first class overland railroad of the same length, and certainly not beyond the limits of international enterprise and international wealth.

The time needed to construct such a chain of stations may be ten years (at the tortoise speed of 120-150 kilometers a year) instead of three, but really, ten years are a short time for inevitable success in comparison with the seventy or eighty years already spent in more or less heroical failures. N. THISHKOV.

Timbirsk, Russia.

Miscellaneous Notes and Receipts.

The Uses of Chrome Glue Especially as Glass Cement.—Chrome glue is known to consist of a moderately strong gelatine solution (containing 5 to 10 per cent of gelatine) to which about one part of acid chromate of potassium in solution is added to every five parts of gelatine. This mixture possesses the property of becoming insoluble by water through the action of sunlight under partial reduction of the chromic acid, a property which is advantageously utilized in photography. The author coated both fractures of a glass as uniformly as possible with the freshly prepared solution, pressed them together, and fixed them in this position with a cord. The cylinder glass was exposed to the sun light and was found to be firmly united after a few hours. Even hot water did not dissolve the oxidized chrome glue, and the fracture was scarcely noticeable. Valuable articles of glass, which would be disfigured by a thick cement joint, can be very nicely repaired in this manner.

In the production of waterproof textures chrome glue is likewise of use; at least, where a certain tightness is no drawback. The fabric, after having been put in a frame, only needs to be painted one to three times with the hot chrome glue and then to be exposed to the sun light or day light.—Prof. Schweizer, in Textil Zeitung.

Mode of Preserving Flowers and Grasses.—In drying flowers and grasses, which are to retain their fresh colors and natural shades, proceed as follows: Take a box with a sliding cover, remove the bottom and immediately below the lid (inside the box) attach a medium fine wire sieve. Procure fine, clean sand, sift off the dust, wash out the sand and dry it at moderate heat. Then warm the sand again in a copper kettle and after it has become hot enough add one-half part (weight) finely scraped stearine to one hundred parts (weight) sand: this is mixed and intimately incorporated with the sand, so that each grain receives a coating of stearine. Cut well developed specimens of flowers or ornamental grasses, place the box with the sliding cover and sieve downward, put in a layer of sand about two inches high, stick the flowers, etc., into this and cover them gradually with sand, but in such a manner that the stems and leaves retain their natural position. Thus continue with alternating layers until the box is filled, then put on the bottom carefully and set the box in a warm place, which must not be too hot. After about forty-eight hours drying is finished, the box is taken down and the sliding cover pulled off carefully; the sand will fall through the sieve and the flowers, grasses, etc., remain dried in their natural shapes and colors.

Production of Printing Inks.—(a) Warm 4·5 parts Venetian turpentine with 2 parts oleic acid as free from stearine as possible, adding 5 parts soft soap. Then add 3 parts of burnt, finely sifted lampblack and a solution of 0·1 part Paris blue and 0·1 part oxalic acid in 5 parts water. (b) 9 parts Venetian turpentine, 10 parts soft soap, 4 parts oleine, 4 parts lampblack. (c) Melt together carefully 25 parts paraffine oil, 45 parts colophony at 80° (176° Fah.), and add 15 parts lampblack. (d) For web printing presses use only 40 parts colophony instead of 45 parts. (e) For perquisites use dammar resin instead of colophony.—Pharm. Zeitung.

Science Notes.

The steamer Warrimoo, from Australia, brings advices as follows: H. M. S. Penguin has just returned to Fiji after surveying the proposed Pacific cable route from Suva to Honolulu. The bottom of the ocean was found to be very uneven. One or two uncharted patches near Honolulu were discovered, but, as they have seven or eight fathoms of water over them, they are not dangerous to navigation.

Sir Rutherford Alcock, K.C.B., F.R.C.S., died recently at the age of eighty-eight years. The deceased was brought up to the medical profession, but soon gave it up for travel and the diplomatic service. He was president of the Royal Geographical Society in 1876, and also presided over the health department of the Social Science Congress a few years afterward. To Sir Rutherford Alcock we owe much of our knowledge of the far East.

Twenty million dollars is the sum which the French government proposes to devote to the Paris Exhibition of 1900. Nearly $10,000,000 will be consumed by the construction of two palaces in the Champs Elysées and those in the Champ de Mars, in the Esplanade des Invalides, and on the quays. The bridges across the Seine are to cost $1,000,000, and the mechanical and electrical services another $1,000,000. In one word, France proposes to do the whole thing on a scale of unprecedented magnificence.

The World's Columbian Exposition Company must pay the loss to the French republic and French exhibitors caused by the fire on January 8, 1894. Such is the opinion of Judge Grosscup, handed down November 8, from the Federal bench. The fire at the Casino and Peristyle showered sparks upon the wooden walk of the Manufactures building. The burning timbers fell into the building and upon the exhibits of the Frenchmen. The French republic lost some fine Beauvais and Gobelins tapestries and two magnificent Sevres vases, made for ornaments at the entrance to the Chamber of Deputies. The loss amounted to about $75,000.

The Straits Times states that, according to telegraphic advices from British North Borneo, an earthquake was felt at Kudat on September 21, as also a slight tremor at several places along the coast. About the same time a new island was thrown up from the sea between Mempakul and Lambeidan, 50 yards from the mainland, opposite Labuan. The island is of clay and rocks, and measures 200 yards long by 150 yards broad and 60 feet high. The island appears to be increasing in size, and emits inflammable gas in several places, with a strong smell of petroleum gas. The earthquake was not felt at Labuan.

Experiments made in the laboratories of Sibley College show that the usual figures for dense smoke per ton of fuel employed ranged from 10 to 12 pounds of soot; of the latter, about one-half was carbon, the remainder principally unconsumed hydrocarbons, 10 to 15 per cent of ash, and, if collected outside the furnace, perhaps 2 per cent of moisture. It was found that no smoke was ever produced in an atmosphere of oxygen. With restricted air supply the maximum just stated was obtainable; but low temperature combustion and restricted oxygen supply appeared to be the two main conditions favoring smoke production. Again, the composition of soot was found often to be substantially that of the coal from which it was produced. A reduction of the proportion of smoke made effects a reduction correspondingly, and, perhaps, proportionately, in the percentage of carbon contained in the soot.

Krupp Armor Plate Process.

According to press dispatches the Krupp armor plate process is to be adopted by both the Carnegie Steel Company and the Bethlehem Company, they having purchased exclusive rights to the process in the United States. The details of the process have not been made public, but it is claimed that the plates which are produced by it are superior to those made by the Harvey process. It is said the cost of the armor under this process will be higher than under the Harvey process. The English armor plate making firms of John Brown & Company, Cammell & Company, Vickers & Company, and the French firm of St. Chamond have also purchased rights of the Krupp process.

Mount Vesuvius in Eruption.

Mount Vesuvius is more active than it has been for years, and the eruption is daily increasing in magnitude. The volcano now presents a beautiful appearance, shooting forth immense columns of smoke and ashes, through which the fire from the central crater pours upward, illuminating the showers of cinders and the lava streams. The wind carries the ashes to Naples.

Swedish Polar Expedition.

King Oscar and a number of private persons have contributed a sufficient sum of money to insure the dispatch of a Swedish polar expedition in 1898. It will be led by Prof. Nathorst, the geologist. The cost of the expedition is estimated at 70,000 crowns.

© 1897 SCIENTIFIC AMERICAN, INC.

STEAM MOTOR CAR FOR BRANCH LINE SERVICE.

It frequently happens that the large railroads have branch lines on which the travel is so light that they cannot be worked to advantage by the usual locomotive and cars. On such lines, where the traffic is light and scattered, a regular train can only secure a full load if it is run at infrequent intervals—an arrangement which, though it may be to the advantage of the company, is more or less inconvenient to the public. To run a regular train at more frequent intervals would be a dead loss to the company, on account of the large dead weight of the train in proportion to the paying load, and also on account of the large train crew which must be employed. Nor would the electrical equipment of such roads be profitable, the travel being too light to warrant the cost.

It is in this particular class of service that the steam dummy, as the combined locomotive and car is called, is likely to prove extremely useful, on account of its large passenger capacity in proportion to the weight of the motor power and the size of the train crew. The composite car which is herewith illustrated has recently been completed by the Schenectady Locomotive Works for use on a branch line of the New England Railroad, where the traffic does not warrant the services of a complete train of locomotive and cars. As the first motor was somewhat in the nature of an experiment, it was decided to make use of an old dining car. The internal fittings, kitchen, tables, etc., were removed, and the car, which is 64 feet long, was divided by partitions into three compartments, one being given up to the engine and the other two constituting the smoking compartment and day coach.

The six-wheeled truck at one end of the car has been retained, but the other truck has been removed and its place is taken by the four-wheeled locomotive shown in the engraving. The cylinders, which are 12 inches diameter by 16 inches stroke, are carried at the forward end of the frame, and are connected to crank pins on the rear axle. The center of the frame is occupied by the vertical boiler, which projects through the engine compartment of the car and answers to the king pin of an ordinary truck. This connection between the locomotive and the car is an interesting feature. A circular casting, which is bolted to the engine frame and to the lower part of the boiler, is provided with a groove, in which are 125 hardened steel balls 1½ inches in diameter. A similar casting is bolted to the framing of the car, and rests upon the circle of balls. This ball-bearing connection permits the motor to take the curves freely, and it also prevents the vibration of the locomotive from being transmitted to the car. The steam pipe connections from the boiler to the cylinders are laid on the inside of the cast iron rings, and flexible steam joints are avoided.

The furnace door is on the front of the boiler, and above it, on the upper end, are steam and air pressure gages, etc. On the opposite side is the Westinghouse air pump, the receiver being carried on the front end of the truck. The coke fuel is carried in bins within the engine room, and the water is carried in the long cylindrical tank which will be noticed slung beneath the body of the car. The car carries sufficient fuel and water for a run of sixty miles. The driving wheels are 42 inches in diameter and the driving wheel base is 8 feet. The total weight of the car is 115,000 pounds, of which 70,000 pounds are on the drivers and 45,000 pounds on the six-wheeled truck.

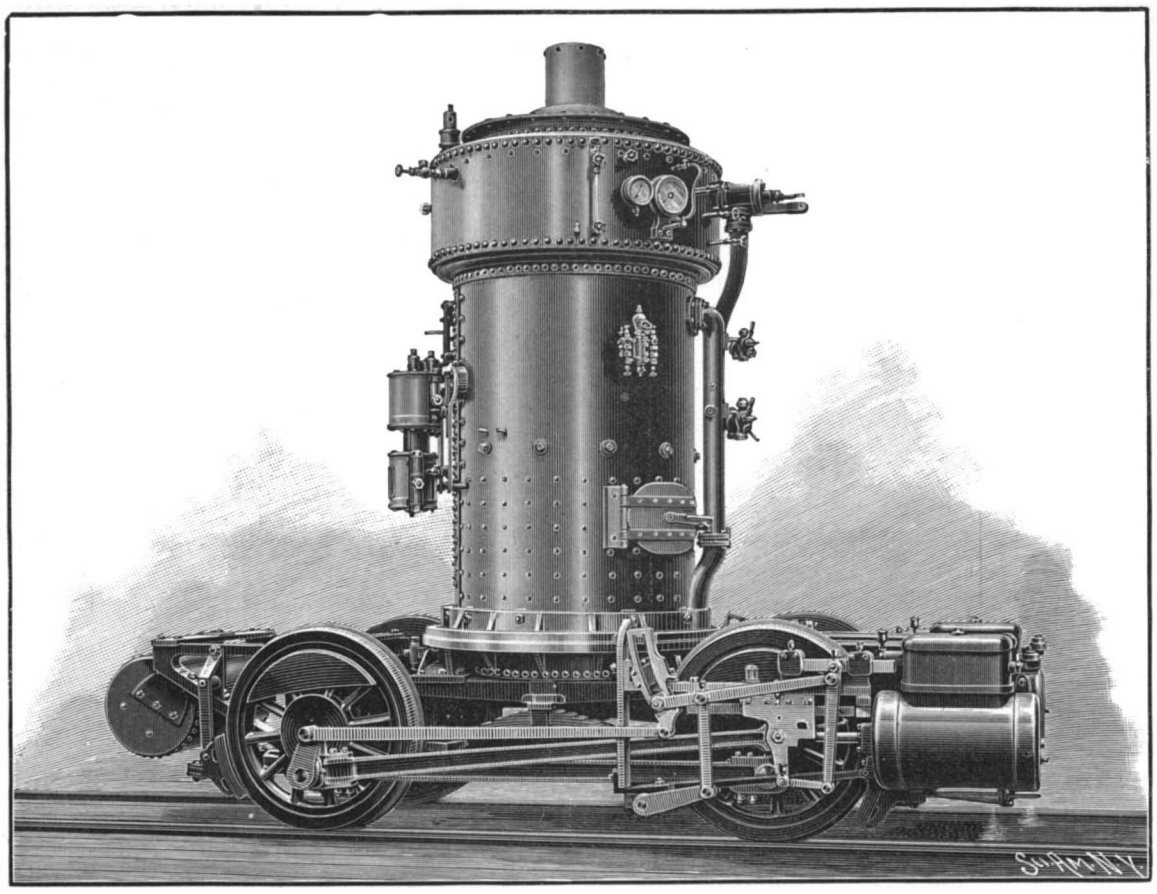

LOCOMOTIVE OF NEW ENGLAND RAILROAD MOTOR CAR.

The car was tested on a grade which varied from 50 to 58 feet to the mile, where, with a regular passenger coach attached, it maintained a speed of thirty miles an hour. A test for speed was made by running the motor car alone on a level track, under which conditions it covered five miles in five minutes and fifty-five seconds. The details of the run were as follows:

	Minutes.	Seconds.
First mile run in	1	20
Second mile run in	1	10
Third mile run in	1	5
Fourth mile run in	1	7
Fifth mile run in	1	13

The fastest mile, therefore, was run at the rate of 53·7 miles per hour.

The car was run under its own power from the Schenectady shops to its destination on the New England road, a distance of 315 miles. It should also be mentioned that the train crew consists of only two men—an engineer and a conductor. This exceedingly interesting design marks a new departure in steam railroad practice, and we shall not be surprised if it proves to be the forerunner of a large and ever-growing number of the same type of motor car.

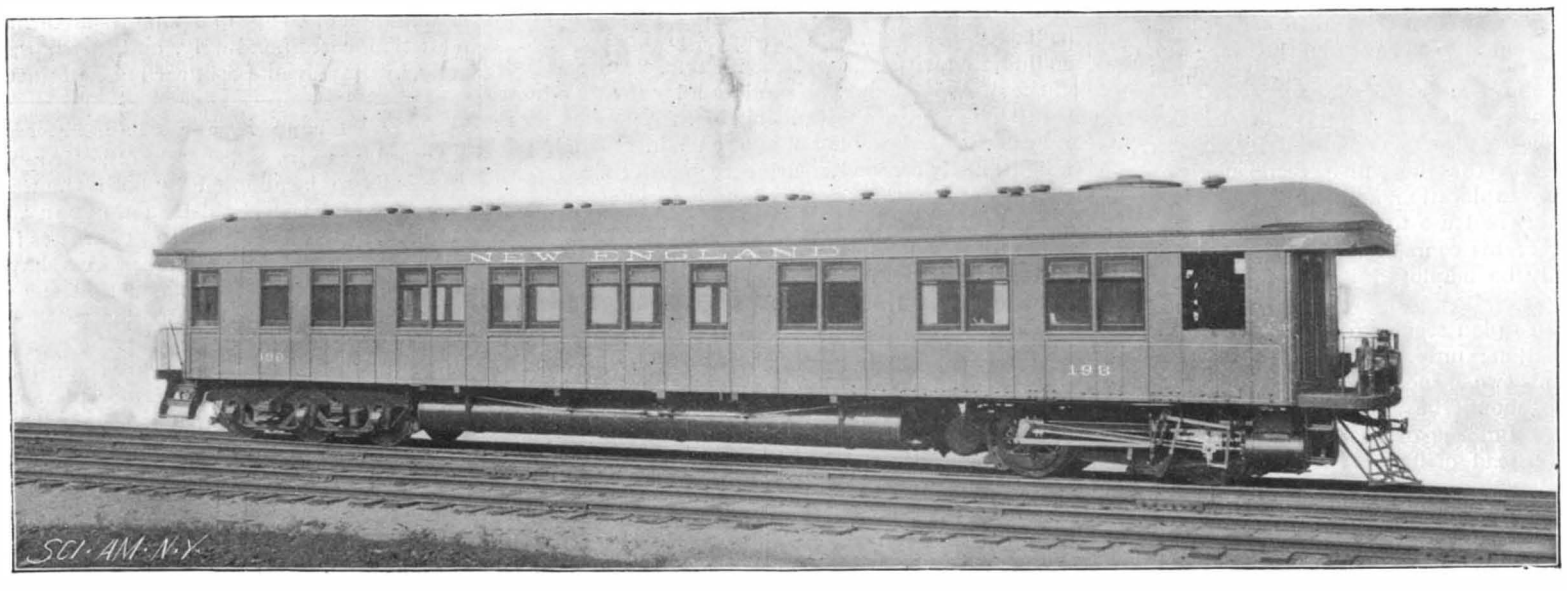

STEAM MOTOR CAR FOR THE NEW ENGLAND RAILROAD, COMPRISING LOCOMOTIVE, SMOKER AND DAY COACH—CAPACITY, 60 PEOPLE.

A REMARKABLE thunderstorm passed over Italy on April 24. The rain was mixed with sand and seeds of the carob that must have come from Africa, according to Prof. Tacchini, of Rome.

A Tank for Model Ships.

An experimental model ship tank, for which Congress appropriated $100,000 last year, is being rapidly constructed in the Washington navy yard. It is thought the tank will be ready for experimental operations early in the spring. The project is being watched with great attention by naval officers and marine architects, as its novel features and purposes are mainly of an untried character. Similar tanks exist in England, Italy and Russia, but the American tank embraces a number of mechanical contrivances which are expected to add materially to our knowledge of hull design. The tank is four hundred and seventy feet long, and is built entirely of concrete, and will be covered by a substantial steel framed building. Spanning the water surface, a moving bridge will carry the dynamometrical device for measuring the resistance of the accurate models of vessels towed from one end of the tank to the other. These models, representing precisely the form of the ships, will be from fifteen to twenty feet long, and when towed at slow speed will furnish data upon which the efficiency of a full-sized vessel at high speeds may be determined from formulæ. The frame for the building, which is to be five hundred feet long and fifty feet high in the clear, is being delivered at Washington. The shelter is designed to enable the maintenance of a constant temperature and an absolutely still atmosphere during experimentation. The towing gear will be operated by electricity. It will be installed next March. The experimental tank at the Washington yard is the design of Naval Constructor D. W. Taylor, who is superintending its construction.

Accident to the Maasdam.

The Dutch steamer Maasdam, from Rotterdam for New York, returned to Plymouth on November 14, with her machinery disabled, arriving there without assistance, however. On November 7 the high pressure and low pressure cylinders of the fore engine broke, smashing the crank shaft, shaft frame and foundations. The accident occurred in a heavy gale. A steamer tried to take her in tow on the ninth, but the hawsers broke. The Maasdam then got her after engine working and on November 10 proceeded without assistance, but when she reached Plymouth her after engine broke down just as she got inside the breakwater. The vessel anchored and her passengers were taken off and sent to New York on another steamer.

Ice Breaking Steamer for the Arctic.

Capt. Sverdrup, of the Fram, Nansen's Arctic vessel, has arrived at St. Petersburg to take part in the proceedings of a conference which is to be held in that city for the discussion of the feasibility of constructing an ice-breaking steamer to penetrate the Arctic Sea, specially along the coast of Siberia.

© 1897 SCIENTIFIC AMERICAN, INC.

THE STEEL CELL AND CENTRAL CORRIDOR SYSTEM OF PRISON CONSTRUCTION.

The new addition to the Erie County Penitentiary at Buffalo marks a departure from the commonly accepted methods of prison construction, and introduces features which not only increase the security with which the prisoner is held, but conduce to far better sanitary conditions than obtain under the common methods of construction. A prison building constructed on the ordinary lines consists of strong outer walls pierced with grated windows, inclosing a central block of cells, which have balconies provided at each story. The cells are provided with swing doors opening onto the balconies, and the balconies are provided with a railing which is usually about 3 or 4 feet high.

There are several objections to this system. In the first place, the security of the prison depends upon the outer walls and the gratings which cover the windows. Then the heating and ventilation are generally imperfect, the higher rows of cells becoming too warm and the lower too cold, as the result of the heated air rising to the top of the main building. The lighting also is usually very poor, as the cells are from 15 feet to 20 feet removed from the outer wall of the building, and the only light that the prisoner gets comes through the grated doorway of the cell. There is a further objection to this system on account of the unprotected condition of the balconies, which, with their low railings, present an easy means of violence by the prisoner throwing himself or the turnkey over, as has at times been done.

The Erie County Penitentiary has been designed with a view to obviating these defects. It will be seen by reference to Figs. 1 and 2 that many of the features just enumerated have been entirely reversed, and that instead of being from 15 to 20 feet from the outer walls, the cells are now placed only 3 feet distant from the walls, thereby providing a wide and roomy corridor down the center of the steel inclosure. This corridor, which is lighted by a skylight which extends over the entire length of it, forms a very commodious exercise corridor and a space in which the prisoners may be safely fed if so desired.

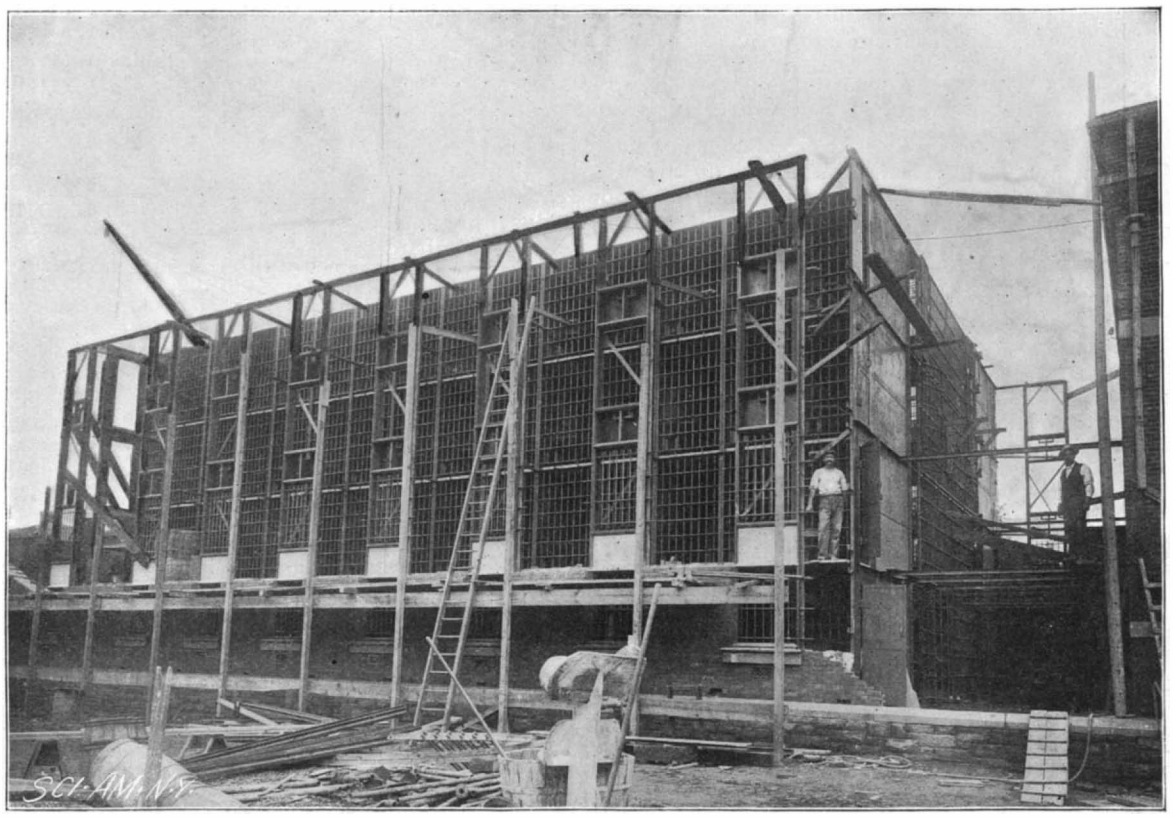

THE STEEL CELLS BEFORE OUTER WALLS WERE CARRIED UP.

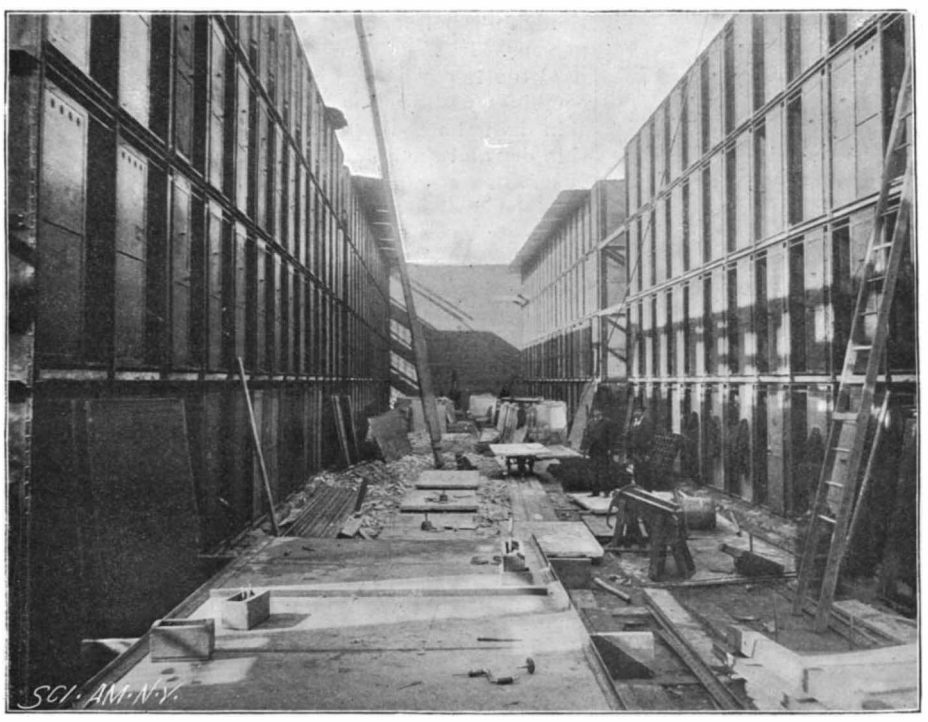

CENTRAL CORRIDOR BEFORE CONSTRUCTION OF BALCONIES.

The exterior walls of the 300 cells and the ceilings inclosing them are made of tool-proof steel grating. The vertical bars of this grating (see Figs. 3 and 4) consist of 1⅛ inch hexagonal steel spaced 6 inches on centers. The cross bars measure ¾ inch by 3 inches and are placed 12 inches on centers, the whole being interlocked in the following manner: The hexagonal vertical bars are provided at every 12 inches of their height with a circular recess, as shown in Fig. 4, which gives 12 shoulders, 6 above and 6 below the cross bars. In putting the grating together, the vertical is inserted into the horizontal (the opening of the latter being hexagonal in shape) and is given one-sixth of a turn, so as to bring the projecting shoulders above and below the metal of the cross bars and securely lock them together. A counterlocking bar is then placed at the top of the joint and is riveted securely to it. It will be seen from Fig. 3 that the counterlocking bar prevents the vertical bar from being turned back, and, consequently, when the prison grating is once set up, the whole system is firmly locked together. The bars are made of a steel which is saw, file and drill proof, and it renders unnecessary the heavy outer walls which are common in prison construction.

Ventilation and the separation of each tier of cells is secured in the following way: On the outer walls of the building in each story are located ordinary steam heating pipes, and above each set of these are the cold air registers. Each section or story is arranged so that the register and the steam can be turned on independently. The air, heated by the pipes, passes through the cells and underneath the door at the front of the cells and then rises to the skylight above the central corridor, as indicated by arrows in Fig. 2. It will thus be seen each prisoner secures the first use of the pure air from the outside. Each cell, moreover, is supplied with additional registers, which can be operated by the prisoner himself, who can regulate the heat at will.

The three feet of space between the cells and the outer wall is utilized as a jailer's corridor, through which the guard can observe the movements of the prisoners. This, it will be understood, is the only side of the cell that is provided with gratings; the floor, ceiling, side walls, and the door opening onto the prisoners' balcony being made of plate steel, and it is through this grating that the prisoners receive the abundance of light from the large windows only three feet away in the main outer wall of the building. The plate steel door of the cell is furnished with a ventilator which is so arranged that when the cell is closed observation of the opposite cell and vice versa is impossible. This, it may be remarked, is the first prison in this country that has been so arranged that a prisoner can be isolated from his fellow prisoners, and obtain an abundance of light and independent ventilation without being thrown in contact with his fellow prisoners. It will be seen, from the illustration of the central exercise corridor and balconies, that the railings around the balconies are extended the whole height of each story, so as to make it impossible for a prisoner to jump over or force his keeper or other prisoners over the balcony rail. The inclosure of each balcony separately gives the keeper an easy means of separating different classes of prisoners and of taking each class out independently for exercise in the central corridor or for work in the shops.

The locking bars governing the doors of the cells are so arranged as

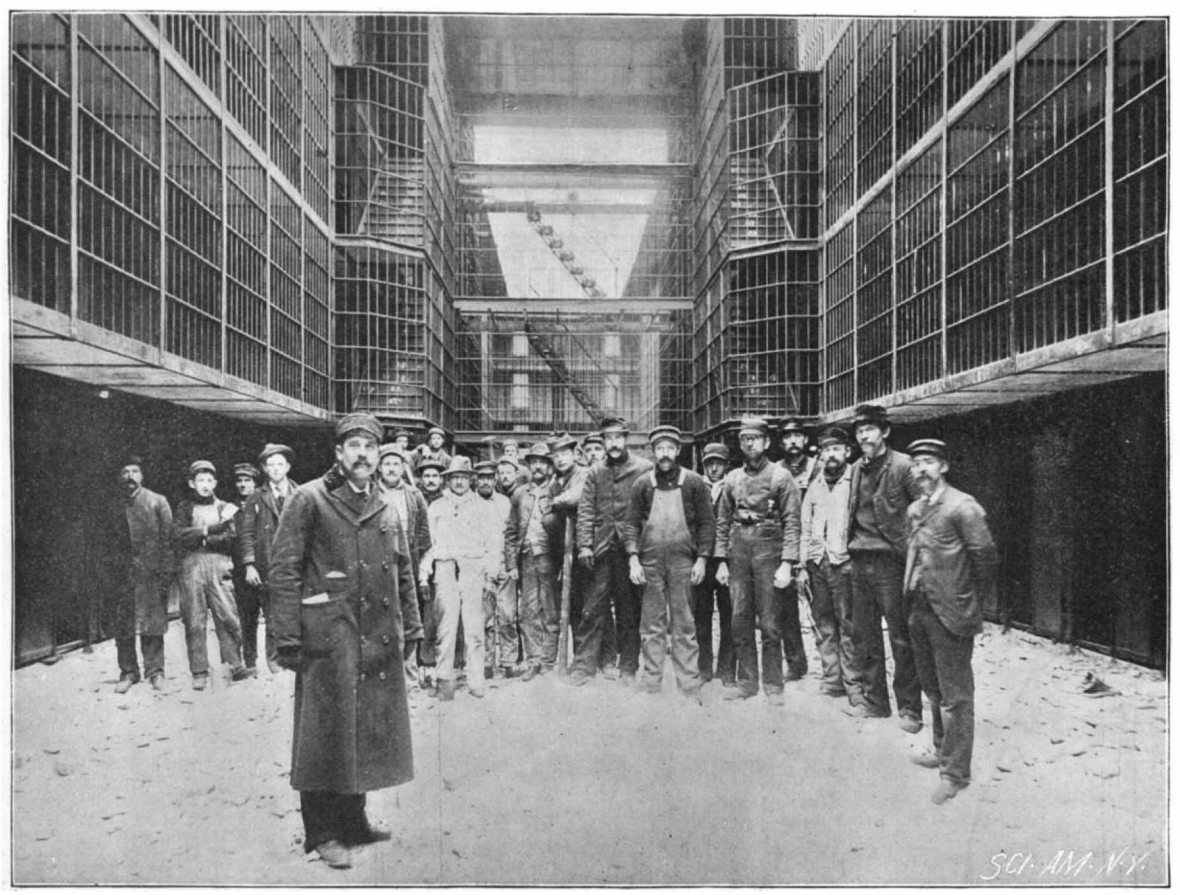

CENTRAL EXERCISE CORRIDOR AND BALCONIES, ERIE COUNTY PENITENTIARY, BUFFALO.

© 1897 SCIENTIFIC AMERICAN, INC.

to allow the entire row of cells to be locked or unlocked by the movement of one lever. At the same time the interlocking is such that a single prisoner can be removed or incarcerated without disturbing the lock bars on the other cells. On the other hand, if the keeper wishes to retain one or more prisoners, releasing the others, he can do this by a simple operation of the lock bar, unlocking the desired number of cells and leaving the balance locked.

About midway of the length of the central corridor the various balconies are connected by a short cross gallery, or watch tower, as it is called, from which the guards are able to watch the door of every cell in the building. The guards' walk at the rear of the cells is built of stone, and is carried on steel angles, which are placed at the same height as the cell floors; outer angles being laid up as the masonry progresses. This walk serves, as we have already described, to form a complete floor from the corridor side of the cells to the outside door of the building, and, as it is perfectly airproof, the system of ventilation, as above described, is carried out to perfection.

This separation of the cells conduces to considerable economy in the operation of the prison, inasmuch as if only one line, or say twenty or thirty cells, are in use, it is possible to heat this particular floor, thus doing away with the necessity of heating the whole prison when only one-half or one-quarter of it is in actual use. The plans of this building were drawn up by the Van Dorn Iron Works Company, of Cleveland, O., the builders of the cellwork, to whom we are indebted for our illustrations and particulars.

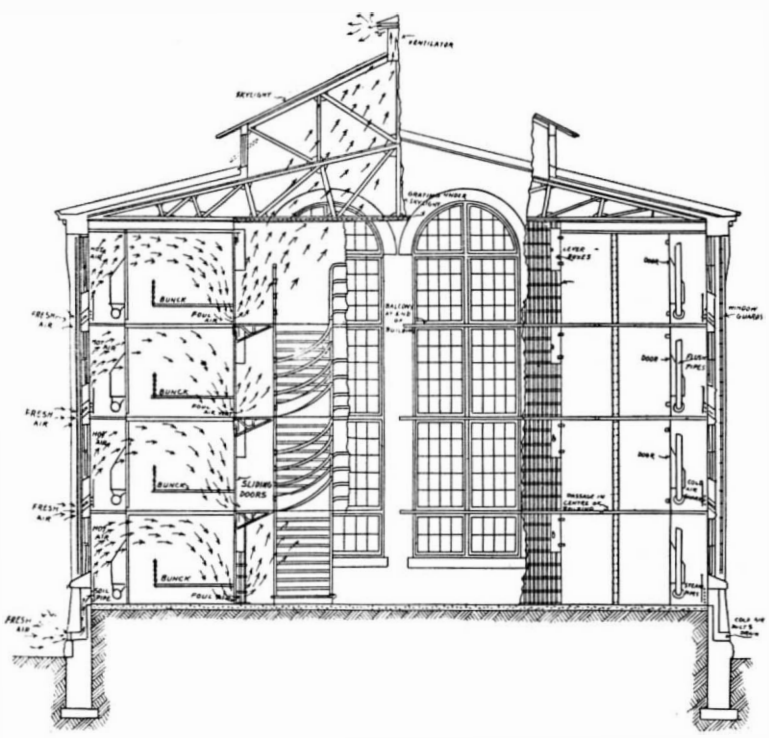

2.—CROSS SECTION SHOWING METHOD OF VENTILATION.

Tuberculous Disease in Fishes.

An interesting contribution to comparative pathology, by Prof. Dubard, of the Dijon school of medicine, is published in the Province Médicale, says the New York Medical Journal. M. Dubard begins his communication with the remark that chance often effects more than patient investigation, as is shown by the fact that after several years spent in bacteriological studies of cold-blooded animals he lately had the good fortune to observe a remarkable case of tuberculous disease in the carp. He then goes on to say that he has long been engaged in trout culture in an abundant spring of pure cold water, of a temperature of from 53·6° to 57·2° F., on a piece of property situated near Dijon. In a reserved portion of the stream eight carps, the remnants of experiments in pisciculture, were placed in October, 1895. For two or three years servants had habitually cast into this part of the watercourses the dejecta and sputa of a person suffering with tuberculous disease of the lungs and intestines.

At the beginning of the winter one of the carps died, and its condition of putrefaction precluded any examination into the causes of the lesions it presented, but M. Dubard's attention was directed to the state of the remaining carps. Three of the seven were found to have tumors of the flank, and these were investigated jointly by M. Bataillon, M. Tene, and M. Dubard. It was found that the first tumor observed, on February 20, 1897, was as large as a hen's egg and had the consistence of a sarcoma. It was formed at the expense of the kidney. Although readily concealable in places, it was elsewhere continuous with the sound renal tissue. Microscopical preparations of the growth showed innumerable bacilli which stained like Koch's bacillus. Amid the lumina of the vessels and the connective tissue, both more or less inflamed and invaded by leucocytes, there were the same bacilli, some of them free, but most of them included in phagocytes. At certain points the formation of tuberculous giant cells was readily recognized.

An extensive series of cultures and inoculations was undertaken. The cultures succeeded at the ordinary temperature, about 57·2° F., but they did better at from 69·6° to 80·6°. At from 96·8° to 98·6° their growth was slow and very difficult to start. There is little difficulty, remarks M. Dubard, in choosing a suitable medium for this micro-organism, but its development requires the presence of oxygen. All the cultures produce bacillary toxines identical with the toxines of the tuberculous disease of birds. On cultures that are a little old there are found dichotomous forms, filaments more elongated and flattened and presenting points where the coloring matter accumulates to a degree suggesting the existence of chlamydospores. On solid media, the closer the temperature to 96·8° F., the more does the dry, scaly look of the cultures distinguish them from those of the tuberculous disease of birds and make their characteristics those of a culture of human bacilli. If bouillon is used, whether a pellicle forms or the growth goes on at the bottom of the vessel, the liquid never becomes cloudy. At a temperature of from 75·2° to 81·2° F., which seems to be the best for this form, the cultures begin to grow in from five to seven days. As regards inoculations of animals, M. Dubard can say little, except that in the course of from seventeen to twenty days there was obtained in the frog a "superb" pleural, pulmonary, mesenteric, hepatic, and splenic tuberculous formation. The results obtained with warm blooded animals the investigators will make the subject of subsequent communications.

The second tumor, examined on April 18, was also renal, and it showed precisely the same lesions and bacilli as the first one. The third carp, which was not very decidedly affected, was kept with a view to provide against possible failures or obstacles in the investigation. M. Dubard inclines to the belief that the microbe found in these carps is a cyprine variety of Koch's bacillus, and that the trinity of tuberculous disease — of man, of birds and of fishes— is one fundamentally.

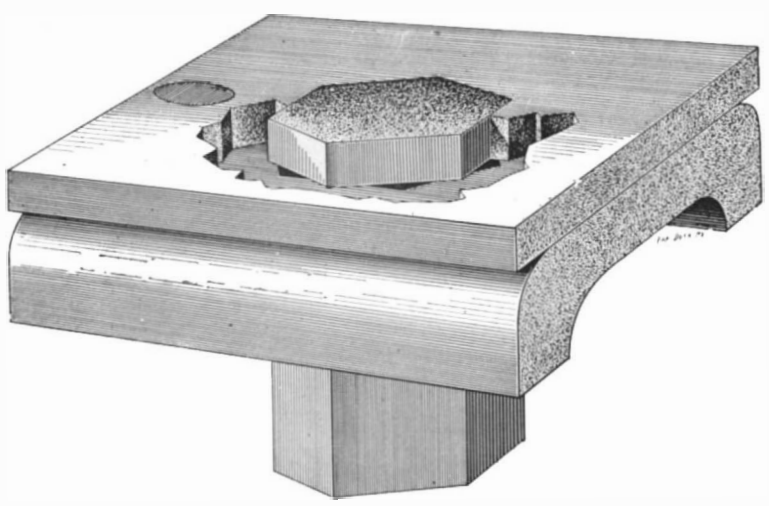

3.—DETAILS OF INTERLOCKING JOINT—GRATING OF ERIE COUNTY PENITENTIARY CELLS.

Dr. Carl Peters Punished.

A special dispatch from Berlin dated November 15 says that the court martial has confirmed the sentence of the lower court upon Dr. Carl Peters, the well known African explorer, former German high commissioner in Africa, ex-chairman of the German Colonial Society. He was charged with extreme cruelty toward the natives when he was commissioner in Africa in 1891. Dr. Peters is dismissed from the German service and has been ordered to pay the entire cost of the prosecution. The indictment charged him with arbitrarily hanging a negro boy in 1891 and the next year a negro girl, and also unjustly making war against Chief Malamia. Dr. Peters protested that he was not guilty and affirmed his belief that in his official capacity he was vested with the power of life or death. He claimed he was obliged to inflict the death penalty in the cases specified in order to save German prestige.

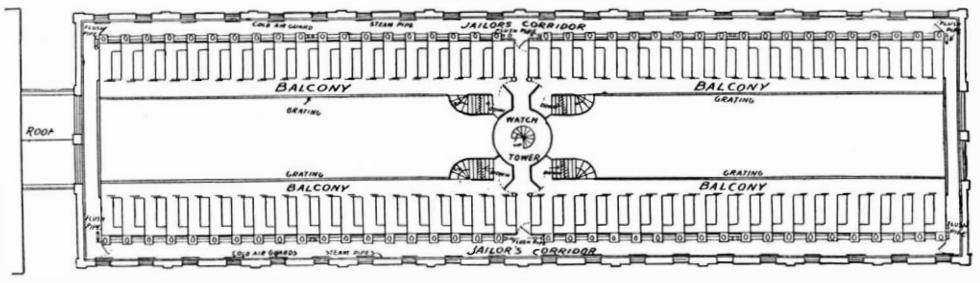

1.—PLAN OF ERIE COUNTY PENITENTIARY.

Borax.

The first issue of the Western Homes, published at Topeka, Kansas, contains many practical suggestions. The following is one of them: Borax has a great variety of uses. It is a great purifier. Wash out the sink and clean the kitchen table with it to keep them sweet. It is a good wash for many skin diseases, though it is poisonous to some persons. It should never be used too freely by any, as it combines with the oil of the skin and hair, leaving the skin dry and the hair brashy. It softens water, and if dishes must be washed in hard water, it will prove a great help. In the laundry, it makes the washing easier and helps whiten clothes, especially if soap containing borax is used. Strong borax water will aid in removing stains made by machine grease. It is good to cleanse brushes, combs, silver and glass. It is a good gargle for sore throat. It is said that a tiny pinch put in the water wherein the face is washed will remove freckles, if persisted in. The fact that it is poisonous to some must be remembered in this connection. It will destroy roaches. It whitens the teeth, and is a good wash for inflamed eyes.



4. SECTION OF VERTICAL STEEL BAR.

EGYPT'S population, according to the census just taken, is 9,700,000, an increase of 2,900,000 since 1882, or about 42 per cent in fifteen years.

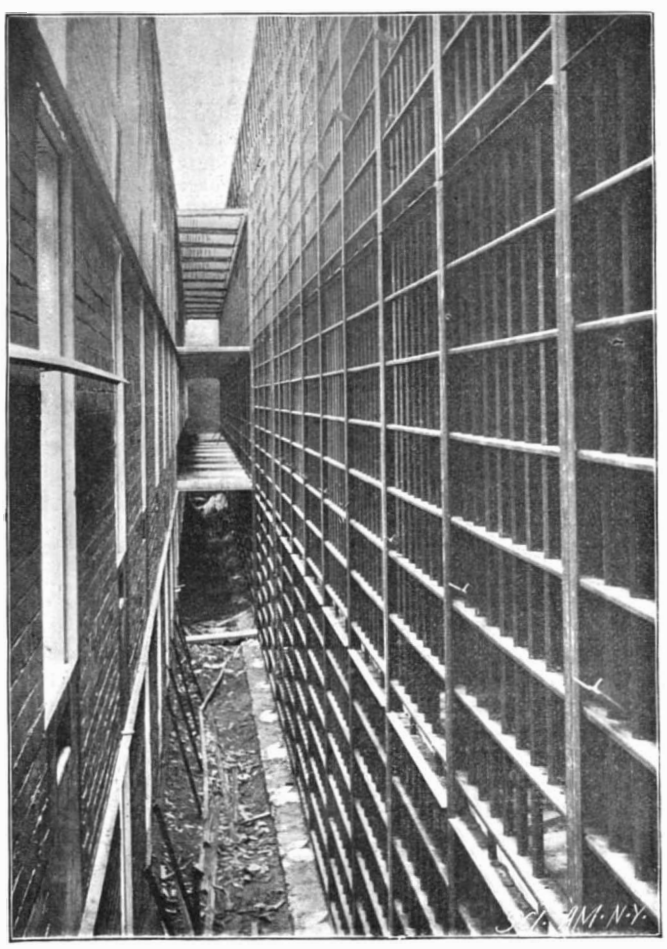

GUARDS' WALK AROUND THE CELLS.

© 1897 SCIENTIFIC AMERICAN, INC.

THE GIANT REDWOOD TREES OF CALIFORNIA.

An interesting story attaches to the huge slab of wood which is shown in the engraving suspended between two railroad cars ready for shipment to England. At a dinner recently given by an American millionaire to a party of English friends in London, the guests had expressed their incredulity at the account given by the host of the mammoth trees of California. To prove his assertions, he offered to wager that he could procure from one cross section of a big tree a table large enough to accommodate all of the forty guests then assembled. The wager was accepted and an order was promptly given which resulted in the shipment of a cut from a redwood log, which was two feet thick and over fifteen feet in diameter.

The engraving shows the novel method of transportation. The possibility of the slab splitting in two, or of a section of it becoming detached, was guarded against by passing two one-inch rods entirely around the circumference and drawing them tight with screw bolts. Two large chains were then slung beneath the slab and made fast to two heavy timbers, one on each side of it, the ends of the timbers resting upon two railroad cars. The lower edge of the slab was a few inches clear of the rails, and the method of supporting it allowed the cars to swing freely in passing round the curves. Before shipping it was dressed down to the required size, and it finally left San Francisco for London by the German ship Maria Hackfield.

The slab was cut by the John Vance Mill and Lumber Company, of Eureka, California, and for the photograph we are indebted to Mr. A. W. Ericson, of Arcata, in the same State.

In felling these giant redwoods the tree is usually cut at a point a few feet above the ground, so as to avoid the great thickness which occurs at the bottom of the stump. Notches are cut in the tree just below the line at which it is to be cut through and planks are inserted in the notches, to form a platform for the two axmen. The tree is then "undercut" on the side toward which it is to be felled. The undercut is V shaped and generally reaches about half way through the tree, the lower face of the cut being horizontal and the upper face sloping to meet it at a steep angle. When the undercutting is complete, the tree is cut through from the opposite side with large crosscut saws, the fall of the tree being guided and hastened somewhat by driving wedges into the cut behind the saw. The tree gives warning of its fall by the cracking of the remaining fibers, and if proper precaution is taken, there is no danger attending the incredibly swift descent of a falling tree, though accidents do occasionally happen, due to the carelessness of the lumbermen.

SLAB OF REDWOOD FOR A LONDON DINING TABLE DESIGNED TO SEAT FORTY GUESTS—DIAMETER 15 FEET.

Water Power and Momentous Changes.

The purposes, says a writer in The Spectator, for which water power is being utilized are exceedingly varied. It is used directly as electrical energy for lighting purposes and for chemical and metallurgical operations. Transformed again into mechanical energy by means of the electric motor, it is used for working tramway systems, for producing wood pulp for paper making, and for driving machinery of all kinds at the mines or in engineering and other workshops. The significance of this new step forward in the application of water power to industrial purposes is startling. On the one hand, it signifies that man has at last learned how to effectually master and utilize one of the mightiest natural forces of the earth.

Coal is an exhaustible possession, and the day must come when the coal fields of the earth will be worked out. Our rivers and falls offer, on the other hand, an inexhaustible supply of energy; for so long as the heat of the sun evaporates the water of the sea, and causes it to fall again as rain upon the hills or as snow upon the mountains, this source will be available for the supply of man's wants, and the arrival of the time when the earth's coal fields will be exhausted need no longer be awaited with misgivings. But there is another aspect of this development which is less cheerful for contemplation by three of the nations of Europe. The position which England, Germany and Belgium occupy to-day as the leading manufacturing countries of Europe has resulted chiefly from their possession of extensive coal fields capable of cheap development, coal having been in the past the chief factor in determining the industrial progress of any country. The progress of electrical science has, however, apparently changed the conditions of industrial supremacy, and it appears as though the possession, not of coal fields, but of water power, will be the determining factor in the future.

Whether the check to the natural growth and expansion of industry in the older manufacturing countries of Europe, that may already be observed as one result of the increased use of water power in countries hitherto of little or no account in the industrial struggle, will be followed by the gradual migration of the staple industries to the cheaper centers of power remains for the future to disclose, but it is a question of tremendous significance for the prosperity of the countries concerned.

"The American Educator—A Library of Universal Knowledge."

The above is the comprehensive title of a splendid work now being issued in six large quarto volumes, with nearly 4,000 illustrations, by the Syndicate Publishing Company, 230–238 South Eighth Street, Philadelphia, Pa. It is an entirely new and up-to-date publication, giving a carefully summarized compendium of the most valuable encyclopædic information, prepared with great judgment and discrimination, and combining therewith a dictionary and library of biography, atlas and statistical gazetteer, while presenting also an ample resumé of the progress of science and the arts, and the facts that go to the making of history right up to the present year. Those who have only the large, old-time encyclopædias, with their absence of information about the striking progress in the arts and sciences for a generation back, will take up these volumes with a keen appreciation of the advance that has been made. The up-to-date character of the work is well illustrated by its large official map of the Klondike region; its account of the life and recent sudden death of Henry George; its explanation of the acetylene lamp, and Maxim's and other flying machines; its fine illustrations and descriptions of Roentgen ray experiments and appliances, and in fact in almost every direction where the reader desires the latest and freshest information. A large corps of editors has been employed upon the work, and the publishers acknowledge their indebtedness to the SCIENTIFIC AMERICAN for many illustrations of late inventions and mechanical processes, the descriptions in many cases having been collated from our columns. The fact that, for a limited period, subscriptions may be made for this new and splendid work at a very low figure, payable in small installments, will probably not be lost sight of by thousands who will be anxious to obtain it, but do not feel able to pay at once the full purchase price.

© 1897 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

MOTOR VEHICLE.—Henry W. Heaton, Olneyville, R. I. This is a four-wheeled vehicle, in which oil or gas may be used to actuate the motor, the vehicle being easily started, stopped and steered. The motor comprises a revoluble combustion chamber fastened on a main driving shaft, between which and the rear axle is a transmitting device, cylinders opening into the combustion chamber, and there being an intermediate mechanism between the pistons of the cylinders and a series of gear wheels rolling off on a fixed gear wheel. In the combustion chamber is an electric igniting device, which is actuated by the rotation of the chamber.

DESULPHURIZING MATTE OR OTHER FURNACE PRODUCTS.—James L. Wells, El Paso, Texas. An apparatus for reducing low grade matte and other furnace products, producing high grade matte or metal in a very simple and economical manner, has been devised by this inventor. The furnace is provided with the usual stack, having a water jacket, and tuyeres are arranged on opposite sides to open into the molten metal, the tuyeres being connected with an air blast with a high pressure air supply. The tuyere consists of a tubular shell, in which a longitudinally divided plug having recesses in its sections forms a longitudinal bore, the sections also having abutting projections engaging a corresponding recess of the shell to prevent the plug from turning.

Electrical.

LOCK CIRCUIT CLOSER.—Charles E. Pierce, New York City. In an electric alarm to be operated when an attempt is made to force the lock of a door, according to this invention, a frame piece is employed carrying two normally disconnected contact points and a lever movable to engage them and thus close the circuit, the device being placed in such position that the lever will be rocked by the bolt of the lock when excessive pressure is applied to the lock, as when the door is sprung by a jimmy or otherwise. Several forms of the device are shown in the patent.

Bicycles, Etc.

HANDLE BAR — Henry W. Heaton, Olneyville, R. I. To reduce to a minimum the transmission of vibration through the handle bar from the frame of the bicycle, in riding over rough places, is the object of this invention, according to which a clamp engages the handle bar and the handle bar stem has a head made in sections inclosing the clamp, there being an elastic material between the clamp and the head and means for drawing the head sections together and clamping the several parts firmly in place, the elastic material taking up the vibrations of the stem. By having the surface of the handle bar roughened, a very firm contact is obtained between the elastic material and the handle bar, preventing possible turning of the latter in the head.

DIFFERENTIAL BICYCLE GEAR.—Guy R. Balloch, Centerville, Canada. To allow a rider to readily and conveniently change from a high gear to a low gear, and vice versa, this invention comprises principally a hollow drive wheel hub provided with differential gear wheels, a double gear wheel being laterally slidable to mesh with either of the hub gear wheels, while a driven sprocket wheel is in gear with the double gear wheel to rotate the latter within the hub and permit its lateral movement. The entire device for transmitting motion to the drive wheel is completely inclosed within the hollow hub, and is thus thoroughly protected from dust and other impurities, and is not liable to get out of order.

DETACHABLE CARRIER FOR BICYCLES.—William M. Tegart, Moosomin, Canada. To facilitate carrying a camera, baggage, etc., on a bicycle, this inventor has devised a carrier which may be conveniently attached to or removed from a bicycle. It comprises a back frame adapted to be clamped to the steering head, and a supporting bracket or bottom frame formed of two sections having a hinged and sliding connection with each other, the inner section being hinged to the back frame. The device is not in the way of the handle bar or the fork for the front wheel, directly above which the load is supported.

Agricultural.

REAPING MACHINE. — Mihail Alexandrescu, Bucharest, Roumania. This is a machine adapted to be pushed along by a draught animal, when it grasps the corn to be cut, bends it down and conveys it to the knives, the cutter bar having motion imparted thereto from the axle. The corn falls upon an endless apron passing over rollers rotated from the axle and is conveyed onto a rack where it collects until it falls to the ground, when the rack is moved inward.

Miscellaneous.

RACE STARTING MACHINE. — Victor Carandini, Calcutta, India. According to this invention a fence or barrier is mounted transversely to the track, in connection with means for raising and lowering it quickly, so that upon raising the barrier the horses may pass. The barrier is formed of two bars with flexible connections and slight independent movement, there being a restraining device for each bar and means tending to lift the bars, while a flexible connection is capable of tripping the restraining device for the second bar when the first bars moves upon being released. The barrier moves upward on the drawing of a cord by the starter.

NECKTIE FASTENER. — Gustave Selowsky, New York City. This is a simple and inexpensive device to be applied to any neckstrap necktie, and which can be quickly and accurately adjusted to fit the tie to any size of neck. It comprises hook and eye straps and a connecting device having at one end a loop embracing the hook strap and at the other end a hook to engage the eye of the eye strap.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co. for 10 cents each. Please send name of the patentee, title of invention, and date of this paper.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

Marine Iron Works. Chicago. Catalogue free.

"U. S." Metal Polish. Indianapolis. Samples free.

Gasoline Brazing Forge, Turner Brass Works, Chicago

Yankee Notions. Waterbury Button Co., Waterb'y, Ct.

Handle & Spoke Mchy. Ober Lathe Co., Chagrin Falls, O.

Inventions developed, models and experimental work. Charles Crook, 144 Centre St., New York.

Canadian Patent No. 50,683, on Pipe Joints, for sale. Apply to M. S., Box 773, N. Y. City.

Improved Bicycle Machinery of every description. The Garvin Machine Co., Spring and Varick Sts., N. Y.

Concrete Houses — cheaper than brick, superior to stone. "Ransome," 757 Monadnock Block, Chicago.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4. Munn & Co., publishers, 361 Broadway, N. Y.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(7242) E. E. S. asks: Will the galvanometer, described in "Experimental Science," show how many volts and amperes of a current, with proper scales? If it will, will you give me proper instructions how to make proper scales? A. The tangent galvanometer of "Experimental Science" will measure amperes; but no permanent scale reaching amperes could be attached to it. Any change in the strength of the needle would change the value of one ampere on the scale. Any good text book of electricity or of physics will explain the tangent galvanometer, but you will not understand it easily unless you have a knowledge of trigonometry. To measure volts with a galvanometer, you require a coil with a large number of ohms resistance. The Deprez-D'Arsonval galvanometer, of "Experimental Science," has hardly resistance enough—150 ohms. Here the scale is an ordinary scale. If you have one volt and can find how far the spot of light moves for it, you can then measure volts. The Daniell's cell gives nearly 1·1 volts. All voltmeters and ammeters are graduated where volts and amperes are at hand with which to make the graduation. You may be unable to do it. All voltmeters and ammeters with scales reading volts and amperes directly are made without magnetic needles, since these easily change their magnetic strength, which would change the value of a given deflection on a scale.

(7243) W. F. R. ask: Is there any direct way, that is, by means of converters and the like, of changing an alternating current into a continuous one? A. The only way to transform an alternating current into a direct current is to run a motor with the alternating current, and with this motor drive a direct current dynamo, which will give the voltage and amperes required. These two machines are sometimes wound on same shaft and called a motor dynamo.

(7244) H. C. C. writes: Please explain how nitrate of gold may be separated? A. It is very doubtful if there be a nitrate of gold. If there be, it is an unstable compound which is reduced at once to oxide of gold or to metallic gold. Fuming nitric acid will dissolve fine gold leaf, but even by shaking the solution with water, the precipitation of gold oxide takes place.

(7245) E. Y. M. writes: I am making the tangent galvanometer described in "Experimental Science." Please inform me what size and kind of wire, also length, to use for the different coils of same? A. For the coils of the tangent galvanometer, as described in "Experimental Science," use No. 27 Am. wire gage copper wire (cotton-covered magnet wire will answer).

	Ohms.	Ft.	In.
For coil b....	1	19	5
For coil c. ..	9	174	7
For coil d....	40	776	0
For coil e....	100	1940	0
Total		2900	0

The weight required is a little more than 1¾ lb.

(7246) J. G. B. asks: What is the difference between an incandescent light of 100 volts, 16 candle power, at $3\frac{3}{16}$ watts per candle power, and one of the same voltage and candle power but of 2½ watts per candle power? I understand the difference in horse power, but not in the lamp or light. Why not use 2½ watt lights in the place of $3\frac{3}{16}$ watt, because there could be more lights used per horse power? A. You can light more lamps per horse power at 2½ watts per candle than at any higher rate of power, but you will burn your lamps out a great deal faster than the decrease of power at 2½ watts will balance. It is more economical to consume three or more watts per candle than to consume the carbon filament so fast and thus shorten the life of the lamp. It is the interest of the lighting company to prolong the life of the lamp, but it is the interest of the user to obtain a large amount of light. There must be a compromise somewhere, and it is made at about 3½ watts per candle.

(7247) W. H. F. writes: I have come across a substance that I think is a compound of acids. If you put a drop of water on this substance, it ignites immediately. Will you please tell me the name of this substance and how it is made? A. We cannot tell the name of a substance we have never seen simply by knowing one property of it. If a drop of water be put on potassium, it will be decomposed and the gas which results will be set on fire. So also sodium will set fire to a drop of hot water. Both these metals are soft, silvery in color when freshly cut, and are kept under kerosene oil for safety. It may be one of these which you have.

(7248) W. M. M. asks: Is there any chemical that will cause the silver on an electric print to disappear? We know that the chloride of lime will do it, but it will not remain away. I want something that will be permanent. These prints are those which are used for crayon work. A. The disappearance of the print when treated with solution of chloride of lime is due to the fact that the chloride of lime changes the silver of the print into chloride of silver, which is white and does not show. To prevent this from turning black again by the light, it must be dissolved and washed out. Prepare the following bath:

Water, distilled	50 parts.
Cyanide of potash	1 "

Soak the print in this for 15 minutes. Wash for one hour in running water and dry. In other words, treat the print as you would any photographic print in fixing, washing and drying. Hyposulphite of soda, 1 in 8 of water, will dissolve the chloride of silver, but is not so powerful as the cyanide. It must never be forgotten that cyanides are most violent poisons, and great care must be exercised in their use, lest they get into the system by the mouth or through a cut in the skin.

(7249) V. W. writes: In your SUPPLEMENT there is a description of a Wimshurst electrical machine, with directions to make it, and in the directions it says to use for the accumulating Leyden jars the hock bottle, and I do not know where to procure these, cannot get them here and do not know to whom to send for them. Will you please inform me as to the closest point here that I can get them; also give name of dealer? I am making one of these machines and would like to have the bottle at once. A. All the glass parts of a Wimshurst or similar electric machine, and all glass apparatus to be charged with electricity, should be free from lead. Glass which contains no lead is called "crown" glass. It is impossible to recognize this glass by its appearance. The best you can do is to get a good window glass for the plates. To test the bottles for the Leyden jars, wash them and dry them thoroughly. When cold, rub them with a dry and warm silk handkerchief or other piece of silk. A suitable bottle will show strong signs of electricity, crackling or even yielding a spark when the finger is presented to it. It is more convenient if these bottles have a wide mouth. You need not be particular to get "hock" bottle; any bottle which will stand test as above is good. A greenish bottle is likely to prove to be of good glass for electrical uses.

TO INVENTORS.

An experience of nearly fifty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

NOVEMBER 16, 1897,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adding register, C. H. Bigelow ... 593,715
Advertiser, automatic, Petsch & Soukup ... 593,754
Air motor, G. H. Cooper ... 593,923
Alarm. See Bicycle signal alarm.
Alarm, W. Lancaster ... 593,669
Amalgamating pan and settler, W. B. Easton ... 593,767
Annealing furnace, B. J. Abbott ... 593,557
Annunciator, electric, J. A. Gowans ... 593,884
Atmospheric burner or heater, W. Parfrey ... 593,904
Atomizer, G. C. Marks ... 593,750
Autoharp, S. G. Stuart ... 593,701
Awning for vines, E. Headley ... 593,654
Awning frame, G. Skinner ... 593,729
Baking pan, W. H. Mullins ... 593,949
Balance escapement, A. M. Lane ... 593,849
Bale tie, J. W. Griswold ... 593,843
Bark peeling machine, J. T. & G. W. Jones ... 593,897
Battery. See Electric battery. Storage battery.
Bearing, shaft, F. A. Tourtillotte ... 593,705
Bed bottom, K. C. Hout ... 593,891
Bed bottom for iron bedsteads, extensible, F. M. Tinkham ... 593,824
Bed bottom, spring, A. F. Purefoy ... 593,781
Bed, folding, F. A. Cooper ... 593,922
Bell, polarized signal, C. E. Scribner ... 593,613
Belt cutter and punch, H. Hubbell ... 593,9 0
Berry carrier, A. Horn ... 593,889
Bib, L. B. Stackhouse ... 593,618
Bicycle, L. De Rango ... 593,814
Bicycle, V. Ernst ... 593,975
Bicycle coasting foot rest, F. A. Neider ... 593,678
Bicycle handle bar, adjustable, PS. Kingsland ... 593,943
Bicycle hanger, Pruden & Waterbury ... 593,728
Bicycle lock, Pond & Taipe ... 593,755
Bicycle signal alarm and brake, C. O. Sobinski ... 593,786
Bicycle steering mechanism, H. L. Stanton ... 593,696
Bicycle support, O'Connor & Hodge ... 593,812
Bicycle wheel, G. Hayes ... 593,653
Bicycle wheel hub, G. Burdick ... 593,764
Boat, ice breaking, B. B. Inman ... 593,664
Boiler. See Steam boiler.
Boiler furnace, O'Brien & Pickles ... 593,851
Book or manuscript holder, E. D. Hall ... 593,935
Book rack, portable, G. R. Alden ... 593,758
Bottle, non-refillable, Wilson & Chatfield ... 593,825
Bottle, nursing, C. Borgenschild ... 593,830
Box. See Junction box. Miter box. Stepbox.
Box fastener, J. W. & C. A. Myers ... 593,753
Box fastener, Sheer & Pitney ... 593,615
Bracket. See Curtain pole bracket. Fan motor bracket.
Brake. See Elevator brake. Wagon brake.
Brake and fender, combined, N. Feigley ... 593,839
Bucket, pick up, R. B. Patton ... 593,969
Buggy top raising or lowering attachment, R. W. Liddle ... 593,591
Burner. See Atmospheric burner. Gas burner. Incandescent burner. Oil burner.
Cabinet, E. Bamberger ... 593,636
Caisson air lock, S. Mattson ... 593,947
Cake or food turner, griddle, C. M. Fowler ... 593,881
Calculating machine, H. M. Minnis ... 593,675
Can. See Sheet metal can.
Canceling device, check, J. M. Willbur ... 593,795
Car, bogie truck motor, J. F. McLaughlin ... 593,599
Car bolster, C. E. Bauer ... 593,637
Car bumper, railway, W. H. Pearson ... 593,605
Car coupling, C. W. Gillespie ... 593,840
Car coupling, E. F. McMurtrey ... 593,950
Car coupling, E. L. Rickson ... 593,815
Car coupling, E. C. Washburn ... 593,951
Car door fastening, mine, F. C. Hockensmith ... 593,938
Car driving gear, motor, F. Kramer ... 593,945
Car, furniture, A. C. Mather ... 593,674
Car mover, Zern & Milhone ... 593,632
Car platform truss, T. L. McKeen ... 593,676
Cars, etc., differential speed and reversing gear for motor and tram, G. G. M. Hardingham ... 593,652
Carpet stretcher, P. A. Lawyer ... 593,898
Carriage fan attachment, baby, Penick & Nash ... 593,687
Carriage, folding baby, J. A. Crandall ... 593,924
Carriage spring gear, J. H. Caffrey ... 593,831
Carrier. See Baby carrier.
Case. See Shipping case.
Cashier protector, Murray & Ivens ... 593,752
Castings, machine for drilling and tapping metal, J. D. Tejada ... 593,622
Chain, J. N. McIntire ... 593,811
Chain, drive, D. Parry ... 593,685
Chain mortising machine, D. Parry ... 593,684
Chains, coupling link for repairing drive, F. Barnhart ... 593,872
Cheese cutter, L. H. Hicks ... 593,656
Cheese cutting machine, A. Ball ... 593,635
Cheese vat, G. J. Liezen ... 593,771
Chest and neck protector, J. H. Way ... 593,954
Chopper. See Cotton chopper.
Chuck, W. C. Obernesser ... 593,681
Cigar or cigarette wrapper cutter, N. Du Brul ... 593,879
Cigar or cigarette wrapper cutting machine, N. Du Brul ... 593,878
Cigarette making device, Tabler & Gracey ... 593,822
Clamp. See Hose coupling clamp.
Cleaner. See Gun cleaner.
Clothes drier, C. M. Biddle ... 593,797
Clothes line holder, G. M. Hughes ... 593,745
Clutch, magnetic, T. J. Fay ... 593,571
Coin operated machines, electrical switchboard for, J. L. Blodgett ... 593,919
Coin transmitter, J. N. Crabb ... 593,800
Conduit, flexible armored, E. T. Greenfield ... 593,842
Cooking utensil, steam, S. T. Robertson ... 593,691
Copying pad, E. R. Hodges ... 593,657
Corkscrew, L. C. Stoll ... 593,698 to 593,700
Cornet, F. J. Richmand ... 593,690
Cotton chopper, F. L. Richter ... 593,908
Cotton picking machine, W. A. Turner ... 593,707
Counting machine, R. Mieble ... 593,773
Coupling. See Car coupling. Thill coupling. Yoke coupling.
Crate, collapsible, S. T. Lewis ... 593,590
Crusher. See Rock crusher. Rotary crusher.
Cultivator, L. Ward ... 593,709
Current motor, alternating, A. J. Churchward ... 593,716
Curtain and shade holder, J. R. Oakley ... 593,850
Curtain pole, E. E. Bechtold ... 593,829
Curtain pole bracket, E. E. Boland ... 593,920
Cutter. See Belt cutter. Cheese cutter. Cigar and cigarette wrapper cutter. Kraut cutter. Meat cutter.
Cycle coasting hub, J. Redding ... 593,688
Cycles, etc., seat or saddle support for, E. J. Byrne ... 593,798
Damper, G. C. & N. P. Fraser ... 593,930
Damper regulator, J. R. Hanlon ... 593,937
Drawer, cash, A. B. Tomlin ... 593,704
Drawing rolls of cotton machinery, rotary clearer for, J. Thomson, Jr ... 593,971 to 593,973
Drier. See Clothes drier.
Drill. See Miner's expanding drill.
Dye, blue-black disazo, Ulrich & Bammann ... 593,790
Electric battery, Hanscom & Hough ... 593,803
Electric currents, multiple metering of, E. Oxley ... 593,852
Electric cutout, H. T. Paiste ... 593,853
Electric switch, W. M. T. Weise ... 593,914
Elevator, A. & A. Iske ... 593,963
Elevator, T. Keenan ... 593,806
Elevator brake, electric, J. P. Casey ... 593,832
Enameling surfaces, A. J. Vollrath ... 593,792
End gate, wagon, Pierce & Warner ... 593,813
Engine. See Gas engine. Steam engine.
Engine muffler, gas, C. A. Schwarm ... 593,970
Engines, vaporizing carbureter and air governor for gas, F. F. Snow ... 593,911
Engraving machine, B. J. Abbott ... 593,556
Fabrics, manufacture of mixed or party colored, H. Giesler ... 593,883
Fan motor bracket, J. E. Fuller ... 593,719
Fare box register, O. Legros ... 593,671
Farm gate, H. W. Bolender ... 593,638
Fastening, C. V. Hoffman ... 593,721
Feed water filtering apparatus, Davie & Wotherspoon ... 593,740
Fence, J. H. Sears ... 593,862
Fence machine, M. L. Curl ... 593,717
Fence machine, wire, T. H. McDonald ... 593,776
Fence stays, spring clamp for wire, M. B. Walter ... 593,868
Filter, O. H. & W. M. Jewell ... 593,666
Filter, self cleaning, Franke & Buchhorn ... 593,573
Firearm extension stock, D. H. Houston ... 593,890
Firearm, recoil operated, C. H. R. Clausius ... 593,835
Firearms, ejector mechanism for breech loading, Smith & Crass ... 593,616
Fireman's tool and hose carrier, J. H. Murnan ... 593,901
Fireproof building, J. E. Hintze ... 593,804
Flagstaff holder, G. P. Neely ... 593,601
Flue cleaner rod, J. L. Marvin ... 593,673
Foot power application, C. K. Heath ... 593,887
Form for displaying clothing, H. Lyons ... 593,592
Fumigator, T. H. McDonald ... 593,777
Funnel and strainer, combined, C. G. Chambers ... 593,834
Furnace. See Annealing furnace. Boiler furnace. Self feeding furnace.
Furniture fastening, S. J. De Long et al ... 593,876
Furniture fastening device, W. S. Hitch ... 593,888
Fuse, shell, F. H. Cogswell ... 593,765
Game apparatus, J. Adler ... 593,731
Game board, parlor, O. A. Wade ... 593,794
Gas burner, W. D. Smith ... 593,785
Gas burner, S. G. Stoddard ... 593,730
Gas burner, multiple, D. P. Stirk ... 593,619
Gas engine, A. Rosenberg ... 593,859
Gas generator, acetylene, B. F. Williams ... 593,628
Gas machine, J. C. Oliver ... 593,682
Gas machine, electrically driven, T. J. Fay ... 593,718
Gas producer, W. B. Hughes ... 593,893, 593,894
Gas producer, B. Talbot ... 593,865
Gate. See End gate. Farm gate. Swinging gate.
Gate, L. D. Hooper ... 593,939
Gate, C. M. Lane ... 593,747
Gear, extension, W. E. Golding ... 593,932
Gearing, sprocket and chain, F. E. Baldwin ... 593,714
Generator. See Gas generator.
Glass tubing, process of and apparatus for drawing, A. A. Houghton ... 593,581
Glassware, apparatus for forming articles of, D. C. Ripley ... 593,857
Glue and making clay size, dissolving, F. Kahrs ... 593,845
Governor, G. A. Brachhausen ... 593,760
Governor, engine, H. B. Halvorsen ... 593,802
Governor mechanism, G. A. Brachhausen ... 593,759
Grain adjuster or butter for binders, W. Gates ... 593,575
Grinding machine, C. J. Luther ... 593,964
Grinding mill, A. J. & W. B. Talley ... 593,823
Gun cleaner, S. Gloor ... 593,648
Hair crimper, J. B. Nicholson ... 593,679
Hair pin, C. A. Packard ... 593,903
Hammock support, portable, Jeffares & McCann ... 593,[illegible]3
Hanger. See Bicycle hanger. Insulated hanger. Shaft hanger.
Harp, G. B. Shearer ... 593,818
Hat brim curling machine, W. J. McGall ... 593,810
Hat holder, W. Johnston, Jr ... 593,805
Hat linings, machine for manufacturing, W. H. Thomas ... 593,702
Heater. See Water heater.
Heater, R. G. Holbrook ... 593,659
Heating and ventilating device, Corbin & Foster ... 593,737
Hides or skins, depilating, H. Holmes ... 593,660
Hoist, chain, J. W. Kincaid ... 593,588
Hoist, differential chain, J. W. Kincaid ... 593,589
Hoisting and conveying machine bucket dumping device, F. H. Schlegelmilch ... 593,816
Hook. See Snap hook.
Horse detaching device, H. Michael ... 593,724
Horse hoof pad, A. H. Dorney ... 593,960
Horse overboot, W. Cain ... 593,564
Hose coupling clamp, O. Pound ... 593,906
Ice dump, W. F. Niebling ... 593,680
Igniting device for gas or like motors, De Dion & Bouton ... 593,877

(Continued on page 350)

© 1897 SCIENTIFIC AMERICAN, INC.

ON 30 DAYS' TRIAL!

READ CAREFULLY EVERY WORD. THIS IS THE MOST ASTONISHING AND LIBERAL EDUCATIONAL OFFER EVER MADE.

Astronomy and Photography Up-to-date | THE MOON as Photographed.

A Fortunate Arrangement just concluded with several prominent educational journals enables us to offer readers of this issue a proposition that is entirely unprecedented—one that **can never be repeated** under any circumstances whatever, and therefore demands the immediate attention of every man, woman and child who sees this announcement, viz.: We will send to any reader of this issue a complete set of **THE AMERICAN EDUCATOR** in **six** large quarto volumes,

ABSOLUTELY WITHOUT THE ADVANCE PAYMENT OF A SINGLE PENNY. . . .

We will give you **Thirty Days** to examine the work and compare it with all others; at the end of that time you can return the books if not entirely sat sfactory, or you can retain them at our **Special Introduction Price** (about **one third** the regular rate), and settle the bill by easy monthly payments. **WE MEAN JUST WHAT WE SAY.** You are to pay us **no money** until you can examine each volume and see for yourself that every claim we make is **absolutely true.** Such a work as ours will be thoroughly appreciated in every home where ambitious boys and girls are earnestly striving for a **higher practical education.** Remember the

YOU TAKE ABSOLUTELY NO RISK.

If by actual test the work does not prove itself to be **the most perfect general reference library** of this day and generation, or if for other reasons you may not desire to keep it, the books may be returned to us at any time **within 30 days.** Nothing but unbounded confidence in **The American Educator** would warrant us in making such a proposition. **We cheerfully assume all chances.** The number of sets to be distributed under this offer is not large, and there will be many disappointments. **Send your order to-day**—no cash required.

WHY NOT OWN THE LATEST AND BEST?

Pure Bred Poultry and 1897 Rules of the American Poultry Association; agricultural chemistry; fertilizing by electricity; everything that is new in agriculture.

American Educator

is a **strictly new** publication. It was begun in 1896 and finished in 1897. **It is fresh and newsy from cover to cover.** The contributions, illustrations, colored plates, maps, etc., cost over $250,000 in cash. Its editors, numbering more than 200, are **world-acknowledged authorities** in their several departments. It treats hundreds of new and very important subjects that other encyclopedias do not even mention—things that happened lately. As an **Encyclopedia,** it exactly meets the wants of busy people who are determined to keep fully up to date. As a **Dictionary,** it answers every requirement of business, study and society. As a **Compendium of Biography,** it gives brief life histories of notable persons of all ages. As a **Gazetteer,** it is a full generation later than any other in existence. As an **Atlas of the World,** it gives an 1897 view of the entire globe, with special maps, showing disputed boundaries, recent surveys, the Klondike region, Hawaii, Venezuela, Greece, etc. In every department it is **absolutely incomparable** in its concise and accurate statements of existing facts. The illustrations number over **4,000,** including magnificent **chromatic plates** showing some 500 designs in 17 brilliant colors, and **200 full page portraits** of the world's great men. All the maps have been specially engraved since Sept., 1897, and are **right up to date.** We make

THIS SEEMINGLY IMPOSSIBLE PROPOSITION

without the least hesitation, knowing that we take no risk. **No one will willingly give up these matchless volumes** after becoming familiar with their wonderful utility and unrivaled excellence. We have supreme confidence in our work and in the intelligent judgment of our patrons, and are determined that no reader of the SCIENTIFIC AMERICAN shall miss this

ONE GREAT EDUCATIONAL OPPORTUNITY OF A LIFETIME

through lack of fairness and liberality on our part. Furthermore, **this proposition is really not an experiment.** Though only two months old, thousands of sets of **The American Educator** are already in the hands of wide-awake buyers. Every mail since the day of issue has brought a host of enthusiastic commendations from purchasers who are apparently overwhelmed with the greatness and beauty of the work. This proves that the demand will be unlimited when people generally learn what a prize we are offering. Our present remarkable proposition aims to spread this knowledge far and wide—to place a few more sets of this incomparable new reference library in the homes of worthy people, where it will be a **perpetual** and **most effective daily advertisement** of a work that every ambitious man, woman and child **actually needs.** Your benefit comes now, **if you're prompt;** our reward will come later, and it's **absolutely certain.**

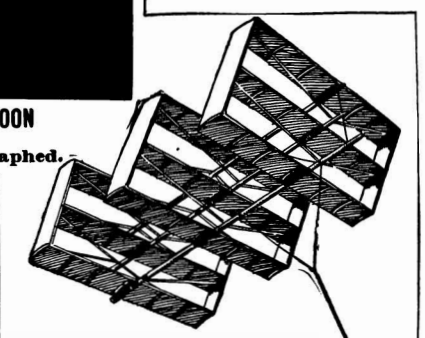

Meteorological Kite—1897 Model.
Latest Government designs, used by the Weather Bureau and Signal Service.

REMEMBER

under this remarkable proposition you are to pay us

NO CASH

until you have satisfied yourself that the books are precisely as represented; if so, they are yours on easy terms and

AT ONE-THIRD VALUE

or you are free to return the set if not just what you want.

Six Great Quarto Vols.

HERE, FOR EXAMPLE,

Are a few instances of our up-to-date treatment of encyclopædic topics:

Cuban affairs are recorded to so late a date as to include a statement of Weyler's recall, and the appointment of Blanco as Captain-General.

Steamships are described with such regard for recent detail that the late record-breaking performance of the *Kaiser Wilhelm der Grosse* (Sept.-Oct., 1897) is chronicled, with perfect drawings of her wonderful triple engines.

The Yukon River Region and the Klondike Gold-Fields are given several pages of description by a government expert, with handsome new official maps and other illustrations.

Populations of over 20,000 American cities and towns are given **for the year 1897.**

Andree and his famous balloon voyage; **Peary's** last trip to the Arctic regions, and the big meteorite he brought back; the history of tariffs, to the **Dingley Bill;** and a thousand other things of living, present interest.

No discriminating buyer can feel quite satisfied with an encyclopædia whose "newness" consists of a few lines added, here and there, to old articles that are badly out of date.

Get This—Compare—Choose.

UP-TO-DATE—1897.

NEARLY 4,000 PAGES.

SIX IMMENSE QUARTO VOLUMES

65,000 Encyclopædic Articles
15,000 Biographical Sketches
75,000 Geographical References
10,000 Columns of Meaty Matter
4,000 Original Illustrations
500 Designs in Brilliant Colors
200 Superb Full-Page Portraits
Nearly One Hundred Colored Maps

We assert positively and without reserve that The American Educator is by far the best edited, best illustrated, best mapped, and most practical work of general reference ever published in any country or in any language. IT IS ABSOLUTELY THE ONLY ONE THAT IS UP-TO-DATE IN EVERY PARTICULAR. We support these statements by the open-handed proposition here offered, by which our unbounded confidence in The American Educator is amply shown.

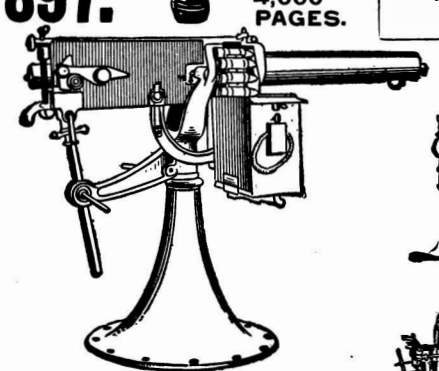

MAXIM MACHINE GUN.
1897 Model.
Fires 300 1-lb. Shells a Minute.

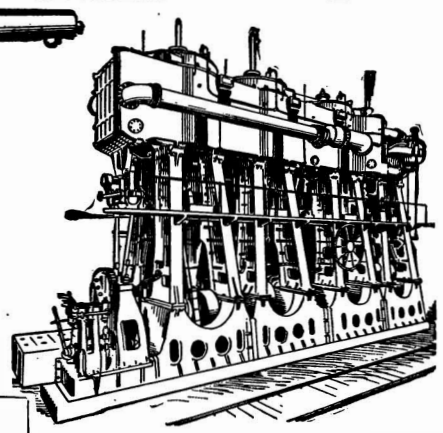

Engines of the New Steamer
"KAISER WILHELM DER GROSSE."
Broke the Southampton-New York record, in Sept.–Oct., 1897.
ENGINEERING IN ALL ITS BRANCHES.

THE JET-PROPELLED LIFE-BOAT—Completed 1897.

What You Must Do.

Send us your full name and address, stating occupation, etc., and say which style of binding you prefer. We will promptly forward the entire set of six quarto volumes, you to pay the transportation charges on receipt. At any time **within 30 days** you can consummate the purchase by sending us your first payment of **$1.00.** The subsequent payments will be, on the cloth style, **$2.00** a month for six months, making a total payment of **$13.00** (regular price $35.00); on the Half Russia style, **$2.50** a month for six months, making a total payment of **$16.00** (regular price $45.00). The cloth style is handsome and solidly bound, but **we always recommend the Half Russia** as more durable and worth the difference in present cost. If, however, you decide for any reason to return the set, you are entirely free to do so at any time within the **30 days,** prepaying the transportation charges. This proposition will not remain open longer than December 31st, and may be withdrawn much sooner. **The earliest applicants only** will secure the introductory sets on these **phenomenal terms.** Book of sample pages mailed free on receipt of 2c. stamp to pay postage. **This announcement will not appear again.**

THAT'S THE WAY WE ADVERTISE—IT'S YOUR GOOD FORTUNE.

SYNDICATE PUBLISHING COMPANY, 230-238 S. Eighth St., Philadelphia.

© 1897 SCIENTIFIC AMERICAN, INC.

Star Lathes ★ Foot power Screw... ...cutting Automatic Cross feed

9 and 11-inch Swing.
New and Original Features
Send for Catalogue B.
Seneca Falls Mfg. Company,
695 Water St., Seneca Falls, N.Y.

ELECTRICAL APPARATUS REPRESENTED by Conventional Diagrams in Drawings.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper. Contained in SUPPPEMENT 1106. Price 10 cents. For sale by Munn & Co. and all newsdealers.

POWER & FOOT LATHES, SHAPERS, PLANERS, DRILLS, MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. CATALOGUE FREE.
SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Boys! Men! "Strike while the Iron's Hot." Complete and Thorough Instruction **By Mail**

ADVANCE YOURSELVES.
IMPROVE YOUR CONDITION.
THE HOME SCHOOLS OF
Mechanical, Electrical, Steam, Civil, and Sanitary Engineering, Architecture, Metal Working, Pattern Making.
To encourage you to start **now**, we furnish $11 mechanical drawing outfit **free.** Small Fees. Advance or *Installments.* Send for beautifully illus. 100 page S. A. catal., postpaid.
United Correspondence Schools,
154 to 158 5th Ave., New York, N. Y.
F. W. EWALD, Gen. Mgr.

Office Desks
Chairs, Tables, etc.

Send for Catalogue and Discounts.
Manufactured by
Derby Desk Co. 138 Portland Street, Boston
114 Nassau Street, New York
☞ Export Business a Specialty.

SAVE ½ YOUR FUEL
By using our (stove pipe) RADIATOR.
With its 120 Cross Tubes,
ONE stove or furnace does the work of TWO. Drop postal for proofs from prominent men.
TO INTRODUCE OUR RADIATOR, the first order from each neighborhood filled at WHOLESALE price, and secures an agency. Write at once.
ROCHESTER RADIATOR COMPANY,
82 Furnace St., ROCHESTER, N. Y.

THE HALL
BRASS PIPE WRENCH.
A PERFECT TOOL WITH FRICTION GRIP.
Bushings for all sizes and shapes.
Highly polished pipes made up without scar or injury.
For Circulars and Prices
WALWORTH MFG. CO., 16 Oliver St., BOSTON, MASS.

COBURN PATENT TROLLEY **TRACK**

Parlor, Barn and Fire Door Hangers
All Styles.
Latest Improvements.
☞ Send for Book.
Coburn Trolley Track Mfg. Co.
Holyoke, Mass.

BARNES'
UPRIGHT DRILLS

Complete line, ranging from Light Friction Disk Drill to 42" Back Geared Self-Feed. ☞ *Send for New Catalogue.*
W. F. & JOHN BARNES CO.
1999 Ruby Street, ROCKFORD, ILL.

Send your business card for 150 p. 1896 catalogue.



NICKEL AND **Electro-Plating**
Apparatus and Material.
THE Hanson & VanWinkle Co.,
Newark, N. J.
136 Liberty St., N. Y.
35 & 37 S. Canal St., Chicago.

Tools For All Trades

You can't even think of a Tool that isn't mentioned in our 1897 Tool Catalogue. Every Metal Worker, every person interested in Machinery or Machinery Supplies, needs it in his business. It contains 710 pages, 10½x7½ inches, and is a complete Tool Encyclopedia. Handsomely bound in cloth, express paid on receipt of $1.00. Money paid for book will be refunded with first order amounting to $10.00 or over.
MONTGOMERY & CO.
MAKERS AND JOBBERS IN
FINE TOOLS,
105 Fulton Street, New York City.

THE TORPEDO BOAT TURBINIA.—This article describes the construction of the Turbinia, which made such a phenomenal speed. Detailed drawings showing arrangement of machinery. SCIENTIFIC AMERICAN SUPPLEMENT 1121. Price 10 cents. For sale by Munn & Co. and all newsdealers.

DROP-FORGING
SEND US MODELS TO FIGURE ON.
OUR WORK IS EQUAL TO THE BEST DONE IN THIS COUNTRY.
NONE BUT SKILLFUL HANDS EMPLOYED.
BAGNALL-LOUD BLOCK CO.
162 COMMERCIAL ST.
BOSTON, MASS.

Impalement trap, L. H. Guertin	593,933
Incandescent burner for lanterns, etc., J. W. Dearing	593,925
Incubator, G. H. Stahl	593,863
Indicator. See Station indicator. Street and station indicator.	
Insulated hanger, E. P. Warner	593,625
Insulator, L. F. Rembe	593,689
Iron. See Soldering iron.	
Ironing board, D. B. Hook	593,661
Ironing machine, J. W. Craw	593,566
Jar wrench, E. B. Colyer	593,736
Junction box and means for uniting metal conduit tubes thereto, metallic, E. T. Greenfield	593,841
Kiln for burning clay goods, E. P. Lee	593,723
Knife fruit paring attachment, B. C. Allen	593,633
Knitting machine, circular, L. C. Huse	593,663
Kraut cutter, Kirkpatrick & Robbins	593,746
Labeling machine, can, H. W. Pease	593,604
Lamp, electric arc, W. H. Coughlin	593,738
Lamp, electric arc, G. R. Lean	593,899
Lamp, electric arc, C. C. Stirling	593,697
Lamp, electric arc, E. P. Warner	593,626
Lantern, Miller & Shaffner	593,725
Lantern, signal, A. F. Prahm	593,606
Lathe, engine, A. F. Prentice	593,607
Lathing machine, J. G. Staudenmayer	593,864
Life saving messenger, marine, J. M. Cotey	593,958
Liquid in tanks, apparatus for circulating, G. E. Dunton	593,837
Loading or unloading apparatus, chain lock in, H. C. Domeyer	593,928
Lock. See Bicycle lock. Padlock. Sash lock. Seal lock.	
Locker for marine purposes, metal, R. W. Jefferis	593,722
Locomotive smokestack, R. Forsyth	593,572
Log barking and washing apparatus, A. Andersen	593,870
Loom, pile fabric, C. H. Burt	593,957
Loom shuttle operating mechanism, power, E. Huschke	593,941
Marine leg pushing device, Hand & Greenberg	593,743
Match safe, W. W. Pennington	593,905
Matches in boxes, etc., machine for packing, P. C. Kjellberg	593,944
Measurements, indicator for electrical, E. B. Rosa	593,858
Meat cutter, C. P. Mosher	593,948
Mill. See Grinding mill.	
Mimeograph, Lindley & Coggins	593,672
Miner's expanding drill, H. M. Soulon	593,617
Miter box, Miller & Denney	593,751
Moulds, runner brick for bottom cast, M. L. Williams	593,974
Motor. See Air motor. Current motor. Pneumatic motor.	
Motor, Lippincott & Homann	593,808
Mower, F. Bower	593,561
Mower, J. G. Hoffken	593,580
Musical instrument, G. A. Brachhausen	593,761
Musical instrument, mechanical, G. A. Brachhausen	593,762
Necktie fastener, Armstrong & Jones	593,955
Nut lock, R. H. Walker	593,913
Oil burner, mineral, J. J. Hall	593,801
Pad. See Copying pad. Horse hoof pad.	
Padlock, permutation, J. R. Houts	593,892
Paint, Aird & Felch	593,917
Paint, C. F. Lawton et al	593,670
Painting machine, W. K. Johnson	593,896
Pan. See Amalgamating pan. Baking pan.	
Paper fastener, R. M. Pancoast, Jr	593,683
Paper in sheet form, drier for, L. Dejonge, Jr	593,926
Paper, mat surface photographic, M. W. McDonald	593,775
Paper perforating machine, Shonnard & Davis	593,694
Pencil sharpener, L. A. Stough	593,912
Picker, A. A. Sweet	593,620
Pin. See Hair pin.	
Planter, automatic check row corn, L. Gist	593,647
Pneumatic motor, F. W. Hedgeland	593,655
Pockets, device for preventing picking of, M. Peraglie	593,727
Post and brace, combined, E. E. Murry	593,774
Powder, blasting, H. Von Dahmen	593,568
Powder packing machine, J. McNab	593,902
Preserving perishable substances, W. G. Day	593,741
Printing press, B. Huber	593,662
Printing press, Huber & Hodgman	593,582
Printing press registering apparatus, W. K. Hodgman	593,658
Propeller, reversible, R. B. Hain	593,934
Pulley, expansible, W. Jasper	593,895
Pulley moulding machine, J. E. Donovan	593,645
Pulley moulds, apparatus for forming, J. E. Donovan	593,644
Pulley, split, J. E. Donovan	593,646
Pulverizing machine, soil, F. P. Krewson	593,848
Pump, H. S. Lockman	593,809
Pump, double acting, A. O. Haney	593,936
Pumping apparatus, oil well, F. M. Kennedy	593,586
Pumping rig, oil well, E. D. Yates	593,826
Punching machine bevel shearing attachment, C. P. O'Neill	593,778
Purse, E. Caldwell	593,640
Puzzle, W. F. Derwin	593,766
Pyroxylin compound, J. H. Stevens	593,787
Queen and drone trap, G. W. Williams	593,712
Quilting machine, J. C. Keough	593,846
Rack. See Book rack.	
Railway signaling and switching systems, protector for wires, rods, etc., in, J. Wrigley	593,869
Railway switch, W. H. Jackson	593,665
Railway switch, S. T. Thornton	593,624
Railway switch, automatic, A. Grossman	593,650
Railway track rails, repairing, H. W. Falk	593,953
Railway trains, coupling for electric circuits in, J. Merryweather	593,965
Refrigerator, H. Staib	593,821
Refrigerator car, C. S. Hardy	593,886
Register. See Adding register. Fare box register.	
Rein protector and supporter, harness, R. A. Corcoran	593,642
Releasing device, safety, R. A. Haegelin	593,844
Rheostat, G. J. Schneider	593,817
Rock crusher, Seabrook & Brown	593,861
Rolling tapered metal, machine for, C. Prouty	593,907
Rotary crusher, N. Campbell	593,799
Rule, combination, W. Rosenkranz	593,608
Ruling, printing and numbering machine, combined, J. B. Edson	593,961
Sash fastener, G. H. Forsyth	593,703
Sash fastener, F. Tuitte	593,706
Sash lock, L. A. Crocker	593,875
Sash, window, A. F. Smith	593,909
Saw file holder and guide, A. Vreeland	593,793
Saw set, C. French	593,574
Saw swage, S. Y. Rawlings	593,752
Scaffold ledger board support, W. S. Bradley	593,639
Scaffolding, painter's, H. Neddermann	593,677
Scale, paper, W. W. Dodge	593,927
Seal lock, R. A. Mills	593,598
Seat or cushion, J. T. Cowley	593,739
Seat spring, J. S. Wood	593,631
Self-feeding furnace, H. Wortendyke	593,713
Self-oiling spindle, J. M. Walker	593,867
Separating heavy from light particles by centrifugal action, L. Maiche	593,900
Sewing machine, G. H. Colley	593,733, 593,735
Sewing machine, H. E. Hawes	593,577
Sewing machine shuttle, G. H. Colley	593,734
Shaft hanger, T. C. Dill	593,742
Shaft hanger, crank, P. H. Brennan	593,562
Shafts, combined cone lock nut and dust cap for crank, G. Burdick	593,873
Sheet metal can, M. Ams	593,558
Shelf, table or desk, folding wall, G. A. Ank	593,828
Shelving and table, convertible, F. Yunck	593,916
Shipping case, F. W. Parsons	593,603
Shoe, W. D. Hall	593,576
Shutter worker, Pitney & Hansen	593,854
Sifter and receptacle, ash, R. Evans	593,838
Sifting granular material, F. G. Winkler	593,630
Sifting granular material, machine for, F. G. Winkler	593,629, 593,915
Signaling mechanism, electric, L. G. Rowand	593,692
Signaling or calling system, electric, J. G. Smith	593,820
Skelp charging apparatus, P. C. Patterson	593,968
Skirt adjuster, A. E. Dean	593,569
Sleigh runners, connecting rod for attachable, J. E. Hobbs	593,744
Smoke consumer, J. H. Saunders	593,860
Smoke preventer, automatic, R. W. Cavenaugh	593,565
Snap hook, twin, Lapsley & Sallee	593,748
Socket piece, hinged, C. M. Hamilton	593,651
Soldering iron, D. H. Allen	593,796
Soldering iron, J. C. Barber	593,918
Soles flexible, machine for making shoe, L. D. Ziegler	593,827
Spike, A. C. G. Dupuis	593,880
Spindle. See Self-oiling spindle.	
Spinning, doubling and twisting machine, combined, Van Alstine & Graham	593,866
Spraying apparatus, J. H. Burck	593,732
Spring. See Seat spring. Wagon bolster spring.	
Spring shackle and oil ejector, combined, J. B. Stone	593,788
Stacking hay, elevated carrier for, E. Dignan	593,643
Stair rod fastener, E. E. Clark	593,641
Stairway or elevator, traveling, R. Cartwright	593,874
Station indicator, W. R. Garner	593,976
Steam boiler, Burns & Ketchum	593,921
Steam boiler, sectional, W. F. Cunningham	593,836

(Continued on page 351)

A Marvelous Machine!



Watch the wonderful work done by our **Apex Nipple and Pipe Mill Machine.** Threads nipples of all sizes. So swiveled that it can be reversed and pipe cut off close to grippers. Vise can be opened or closed while machine is in motion. Send for catalogue. **THE MERRELL MFG. CO., 501 Curtiss Street, Toledo, Ohio.**

THE CONDENSING STEAM RAM
A Wonderful Device for Raising Water
In Large or Small Quantities. For All Purposes. At Smallest Cost. Guaranteed to save
50% IN FUEL, 50% IN TIME, AND 50% IN ORIGINAL COST.
☞ Send for Testimonials.
THE ERWIN HYDRAULIC MACHINERY CO.
58 & 59 Loan & Trust Bldg., Milwaukee, Wis.

QUEEN'S NEW
AUTOMATIC LAMP.



Its Six Points of Superiority:
1. It keeps in focus constantly. 2. Regulates and runs silently. 3. No attention required to help it regulate. 4. The full crater is projected. 5. The negative carbon is non-luminous. 6. The adjustments are all outside.
☞ *Send for circular to*
QUEEN & CO., Inc.
1011 Chestnut St., Philadelphia

HARDENED EDGE
SOLID STEEL SQUARES
Warranted accurate. Not graduated.
1 inch, $1.50. 2 inch, $2.00. 3 inch, $2.50.
Also 4½, 6, 9, and 12 inch sizes.
☞ *Catalogue of Fine Tools free.*
THE L. S. STARRETT CO. Box 13, Athol, MASS. U. S. A.

ALCO VAPOR LAUNCH

Motor controlled from bow. Valve movement, 12 to 1, 16 to 60 ft. Launches. Twin Screws a specialty. 1, 2, 3, 5, 7, 12 H. P. No licensed engineer or pilot required. Speed and Safety guaranteed. No dangerous Naphtha or Gasoline used. No disagreeable vibration.
☞ *Send Ten Cents in Stamps for 1897 Catalogue.*
Marine Vapor Engine Co., ft. Jersey Av., Jersey City, N.J.

ROCK DRILLS
AIR COMPRESSORS
SIMPLEST, MOST EFFICIENT and DURABLE.
RAND DRILL CO.
Send for Catalogue. 100 Broadway, New York.

MONITOR MARINE GAS ENGINES



LAUNCHES $200.00 AND UP.
MONITOR VAPOR ENGINE AND POWER CO.
GEO. H. GERE GENERAL U.S. SALES AGENT GRAND RAPIDS, MICH.
SEND 4 CENTS IN STAMPS FOR LARGE CATALOGUE

ACETYLENE GAS AND CARBIDE OF Calcium.—All about the new illuminant, its qualities, chemistry, pressure of liquefaction, its probable future, experiments performed with it. A most valuable series of articles, giving in complete form the particulars of this subject. Apparatus for making the gas. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **998, 1004, 1007, 1012, 1014, 1015, 1016, 1022, 1035** and **1038.** The most recent apparatus of simple and more elaborate type described and illustrated in special acetylene Supplement No. **1057.** Price 10 cents each. To be had at this office and from all newsdealers.

THE HARRINGTON & KING PERFORATING CO.
PERFORATED SHEET-METALS
FOR MILLING & MINING MACHINERY
WE SUPPLY WHAT YOU WANT, ANY THICKNESS OF METAL, ANY SIZE & SHAPE OF HOLE
225 NORTH UNION ST. CHICAGO, ILL. U.S.A.

AMERICAN PATENT
Pop Safety Valve
For Marine and Stationary Boilers.

Portable and Farm Engine Valves, Locomotive Valve and Muffler, and American House Heater Valve.
☞ *Send for Catalogue A.*
AMERICAN STEAM GAUGE CO.
34, 36 & 38 Chardon St., Boston, Mass.



A DESIRABLE HOLIDAY GIFT.
. . DRAPER'S . .
Recording Thermometer
Standardized and Warranted.
Gives a correct and continuous record in ink on a weekly chart.
☞ *Write for particulars.*
THE DRAPER MFG. CO.
152 Front Street, New York.

THE "INDUSTRIAL"
OXY-HYDROGEN COMPOUND JET.
Capacity, 1000 candle power. Highly finished and nickel plated. Price $10.00. This jet can be fitted to almost any good magic lantern, etc., and will produce a very powerful and white light.
Write to **Peters, Mantz & Co.** (many years with the **late Chas. Beseler**), Makers and Patentees of High Grade **"Industrial" Stereopticons, Magic Lanterns, and Accessories** of every description used for Lantern Projection.
125 and 127 Worth Street, New York City.

Patent applied for.

Print Your Own Cards
Labels, Circulars, or newspaper. Five Dollar Press. Larger $18. Type setting easy, printed rules. Money saved; also big profits at printing for others. Stamp for a catalog, presses, type, to factory.
KELSEY & CO. Meriden, Conn.

STEAM ENGINEERING
(Stationary, Locomotive, Marine); Mechanical Drawing; Architectural Drawing; Machine Design; Electricity; Architecture; Plumbing; Railroad, Municipal, **31 COURSES** Hydraulic & Bridge Engineering; Surveying and Mapping; Metal Pattern Cutting; Bookkeeping; Shorthand; English Branches; Mining; Metal Prospect'g.
All who study **GUARANTEED SUCCESS.**
Fees Moderate, Advance or Installments.
Circular Free; State subject you wish to study.
International Correspondence Schools, Box 942, Scranton, Pa.

Physical and School Apparatus
GALVANOMETERS
STANDARD, SINE, TANGENT, REFLECTING and WIEDEMANN GALVANOMETERS . . . . .
Catalogue free.
E. S. Ritchie & Sons, Brookline, Mass.



This beats Wind, Steam, or Horse Power. We offer the **WEBSTER 2½ actual horse power GAS ENGINE** for **$150,** less 10% discount for cash. Built on interchangeable plan. Built of best material. Made in lots of 100 therefore we can make the price. Boxed for shipment, weight 800 pounds. Made for Gas or Gasoline.
☞ *Write for Special Catalogue.*
WEBSTER M'F'G CO.,
1074 West 15th Street, CHICAGO.

PIERCE 2 ACTUAL H. P.
PRICE, Complete, $135.00.
Made for Gas or Gasoline.
MARINE ENGINES TO 4 H. P.
16, 18 and 21 foot Launch Outfits complete. All sizes
Stationary to 25 h. p.
☞ *Send for Circular of size wanted.*
PIERCE ENGINE CO.
17 N. 17th St., Racine, Wis.



THE MACHINERY OF A NAPHTHA Launch.—A detailed description of the motive power of a Modern Naphtha Launch, with sectional views showing all the parts of the boiler and engine. A most valuable paper. 4 illustrations. Contained in SUPPLEMENT 1104. Price 10 cents. For sale by Munn & Co. and all newsdealers.

THE IMPROVED GAS ENGINE.
Two cylinders in one casting. Occupies less space and weighs less for its power than any engine made. Can be used wherever power is required. Either stationary or marine. No fire. No heat. No smoke. No licensed engineer required.
☞ *Send for catalogue.*
SINTZ GAS ENGINE CO.,
Grand Rapids, Mich., U. S. A.

VAPOR LAUNCH Complete for $150 and Upwards.
ROW, SAIL and STEAM BOATS.
☞ *Send five cents for Catalogue.*
RACINE YACHT AND BOAT WORKS,
Racine Junction, Wis., Box A.

THE NEW BRISTOL COUNTER

Registers an accurate account of work done on printing presses, grain tallies, weighing, measuring and other automatic machines. Counts up to 1,000,000 and repeats automatically. Simple, accurate, durable. Special counters to order. ☞ *Send for circular.*
C. J. ROOT, Bristol, Conn, U. S. A.

ROUND OR SQUARE BASE
SKINNER Improved PLANER CHUCKS. Heavy, strong, accurately made. Greater capacity than any other chuck. Set screws of crucible steel. All nuts case-hardened. Drop forged steel wrench with each chuck. Holds straight or taper work. Can be instantly adjusted from 0 to greatest capacity.



SKINNER CHUCK CO., Church St., New Britain, Conn.

PERPETUAL MOTION
A valuable series of papers giving all the classic forms of perpetual motion apparatus. The literature on this subject is so very limited, the only book being entirely out of print, so that this series will be important to all inventors. 30 illustrations. SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **1130, 1131, 1133, 1135, 1136, 1137, 1138.** Price, 10 cents each. For sale by Munn & Co. and all newsdealers. Send for new catalogue.

Print Your Own Circulars

business cards, dodgers, etc., or let your boy combine business with amusement and print them for you. Splendid educator for youth and great aid to business men. A full line of hand and self-inking printing presses type and all printing supplies. Write for catalogue. J. F. W. Dorman Co., 121 E. Fayette St., Baltimore.

There is Satisfaction in it
Those who pay their money for the
No. 2 HARTFORD
have the comfortable feeling which comes to all who receive their money's worth. . .
THE HARTFORD TYPEWRITER CO., Hartford, Conn.

DEFIANCE MACHINE WORKS
DEFIANCE, OHIO, U.S.A.
BUILDERS OF
HUB, SPOKE, WHEEL, BENDING, WAGON, CARRIAGE AND HOOP MACHINERY.
SEND FOR CATALOGUE

© 1897 SCIENTIFIC AMERICAN, INC.

Buy Telephones

THAT ARE GOOD--NOT "CHEAP THINGS."
The difference in cost is little. We guarantee our apparatus and guarantee our customers against loss by patent suits. Our guarantee and instruments are **both good.**
WESTERN TELEPHONE CONSTRUCTION CO.
250-254 South Clinton St., Chicago.
Largest Manufacturers of Telephones exclusively in the United States.

BERLINER TRANSMITTER PATENTS.—A full text of the decision of the Supreme Court. SCIENTIFIC AMERICAN SUPPLEMENT, 1117, 1118. Price 10 cents each. For sale by Munn & Co. and all newsdealers.

MAGNETO BELLS
ALL KINDS PRICES OF PARTS TELEPHONES
ELECTRICAL SUPPLIES
SEND STAMP FOR CATALOGUE. MIANUS ELECTRIC CO. MIANUS, CONN

Phonographs, Graphophones, Projectoscopes, Kinetoscopes,
RECORDS, FILMS, ETC.
☞ 36 page illustrated catalogue sent free on receipt of 2-cent stamp.
The Edison Phonograph Co., 427 Vine St., Cincinnati, O.

SO SIMPLE A CHILD CAN USE THEM



SUNART
MAGAZINE CAMERA.
Folding Cameras.
All sizes, ranging in price from $5 to $100. Sunart Junior, 3½ x 3¼ picture, $5.
☞ Send 2 cent stamp for Illustrated Catalogue.
SUNART PHOTO CO.
5 AQUEDUCT STREET, ROCHESTER, N. Y.

A FOLDING CAMERA.—WORKING Drawings showing how to build a folding camera. A practical paper by an amateur for amateurs. 4 illustrations. Contained in SUPPLEMENT 1021. Price 10 cents. For Sale by Munn & Co. and all newsdealers.

IT COSTS NOTHING TO TRY!

All steam users can save time money and trouble with the simplest, safest and most satisfactory trap in existence—the **HEINTZ STEAM TRAP** Guaranteed never to wear out. Look at the cut and see how it's done! Pay me what you save in coal for one year and I'll furnish the trap free. ☞ See illus. notice Sci. Am. July 15, 1897. Sole American Mfr.
ESTABLISHED 1874.
Wm. S. Haines, S 136 S. 4th St., Phila., Pa.

CARBORUNDUM
HARDEST ABRASIVE KNOWN. EMERY AND DIAMOND POWDER SUBSTITUTE. IN FLOUR, POWDER-CRYSTAL-WHEEL-SLAB & HONE FORM.
CARBORUNDUM CO. NIAGARA FALLS, N.Y. U.S.A.

MINERAL PRODUCT OF THE UNITED States in 1895-1896.—A valuable table, accompanied by statistics. SCIENTIFIC AMERICAN SUPPLEMENT 1119. Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for 1897 catalogue.

Electric Battery Motors.
Motor No. 1, 4 in. Fan.....$3.75
" " 2, 6 " " $6.25
" " 3, 8 " " $8.75
5 x 7 Bunsen Cell..... $1.25
☞ Circular free. **C. M. Turnquist, 216 South Clark St., Chicago, Ill.**

If You Want the Best Lathe and Drill

CHUCKS
BUY WESTCOTT'S *Strongest Grip, Greatest Capacity and Durability, Cheap and Accurate.*



Westcott Chuck Co., Oneida, N. Y., U. S. A.
Ask for catalogue in English, French, Spanish or German.
FIRST PRIZE AT COLUMBIAN EXPOSITION, 1893.



Headquarters for
DUMPING HORSE CARTS.
Wide and narrow tires.
Low rates of freight from our works—Tatamy, Pa.—to all points.
HOBSON & CO.
No. 4 Stone St., New York.

EDGE TOOLS

are often nearly ruined by using a grindstone not adapted to the work. Our quarries produce a large variety of grits suitable for grinding any tool.
☞ *May we send you our Catalogue, which will give you some information?*
GRAFTON STONE COMPANY,
No. 80 River Street, Grafton, Ohio

DO YOU USE GRINDSTONES?

If so, we can supply you. All sizes **mounted** and **unmounted,** always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. ☞ *Ask for catalogue.*
The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

ON A STILL HUNT.
The up-to-date sportsman needs for success, personal comfort, and protection the **Ideal Hunting Shoe.** Tanned horsehide uppers gray color, soft as a glove, tough as steel, cannot harden. Wide double soles, rubber cemented together. Practically waterproof, flexible, easy. The most serviceable shoe for surveyors and engineers. *Illus. circulars free.*

M. A. SMITH & SON,
Manufacturers, 29-31 N. 13th Street, Philadelphia.
SPORTING SHOES OF ALL KINDS.

BEST **Drying Machines**
for Grain, Sand, Clays, Fertilizers, Phosphates, Green Coffee, Wet Feeds, Salt, Sugar, Chemicals, etc. 15 Years in operation. *Send for 6th illustrated catalogue.*
S. E. WORRELL, Hannibal, Mo.

Steam engine, C. D. Armstrong	593,634
Steam plant, D. M. Thompson	593,703
Steering mechanism, hydraulic, A. Bain	593,871
Step box, H. E. Snyder	593,695
Stereoscope or other binocular instrument, H. C. White (reissue)	11,638
Storage battery, E. A. Barber	593,559
Stove burner, gas, M. A. Thiel	593,623
Street and station indicator, S. E. Bisbee	593,956
Street sweeper, J. Z. Levy	593,749
Surveying instrument, J. Short	593,784
Swinging gate, W. R. White	593,757
Switch. See Electric switch. Railway switch.	
Tacking tool, hand, A. F. Preston	593,780
Tapping beer kegs, mallet for. E. Johnson	593,942
Telephone, J. Weil	593,627
Telephone and signaling or calling system, J. G. Smith	593,819
Telephone exchanges, multiple switchboard system for, C. E. Scribner	593,611
Telephone line toll counter, C. E. Scribner	593,612
Telephone system, C. E. Scribner	593,614
Telephone toll apparatus, W. Gray	593,962
Telephone toll station, W. Gray	593,720
Thill coupling, W. S. Osborn	593,602
Tie. See Bale tie.	
Tire cover, pneumatic, J. West	593,952
Tire tightener, Sager & Alvis	593,693
Tire, wheel, W. A. Fries	593,931
Toy, magic, Klingler & Mayne	593,807
Trap. See Impalement trap. Queen and drone trap.	
Trees, plants, flowers, etc., means for protecting small, J. W. Hilton	593,579
Trolley, O. L. Kirsch	593,847
Trousers stretcher, F. L. Sampson	593,609
Trowel, J. Hilton	593,770
Tube expander, J. O'Rourke	593,779
Tubing, M. M. Nicholls	593,726
Tubing, apparatus for manufacturing, P. C. Patterson	593,966
Type containing channel, Johnson & Low	593,667, 593,668
Typewriter tool, C. S. Vidor	593,791
Typewriting machine, L. S. Burridge	593,563
Typewriting machine, R. W. Uhlig	593,789
Underclothing, combined woolen and linen, F. Linneborn	593,772
Valve, Marea & Connors	593,594
Valve, air, J. P. Marsh	593,595
Valve, quick action triple, G. Westinghouse	593,710, 593,711
Valve, quick opening, Crane & Hayden	593,567
Valve, straightway, Keyes & Gluck	593,587
Vehicle cover, portable, C. T. Jewett	593,584
Vehicle, foot-propelled, G. G. J. Millar	593,597
Vehicle wheel, C. E. Bulkley	593,763
Vehicle wheel, R. K. McLellan	593,600
Vehicle wheel, E. Vincent	593,708
Vise, J. Goodrich	593,649
Wagon body, G. M. Harrison	593,769
Wagon bolster spring, T. G. Mandt	593,946
Wagon brake, automatic, H. H. Emery	593,570
Warp beam tension regulator, F. F. Parsons	593,686
Washing machine, A. A. Casler	593,833
Washing machine, W. Manteuffel	593,593
Washing machine, W. H. Meyer	593,596
Washing machine, J. W. Ricker	593,856
Washing machine, H. E. Smith	593,910
Water heater, G. Taubald	593,621
Welding apparatus, tube, P. C. Patterson	593,967
Well ejector, J. J. Greer	593,885
Wheel. See Bicycle wheel. Vehicle wheel.	
Wig frame, A. D. Barrett	593,560
Winding tapering cops, machine for, S. W. Wardwell, Jr.	593,756
Window casing and pulley support, Jones & Harig	593,585
Window or curtain fixture, P. G. Emery	593,929
Window, reversible, L. Proll et al	593,855
Wood splints, apparatus for cutting, K. H. Schafer	593,610
Wrapping machine for newspapers, etc., H. B. Clark	593,959
Wrench. See Jar wrench.	
Wrench, S. T. Freas	593,882
Yoke coupling, neck, C. H. Heimlich	593,578

DESIGNS.

Armature, O. Wiederhold	27,870
Basket, J. H. Hoff	27,857
Bicycle frame, H. G. Piffard	27,873
Bottle stopper lever, P. J. Gross	27,860
Brush, M. Lange	27,856
Brushes or similar articles, back for, D. A. Loeser	27,855
Car seat frame, H. S. Hale	27,871
Carriage seat, S. R. Bailey	27,872
Counter, auxiliary change, G. E. Crump	27,863
Door stop, J. Schenck	27,867
Envelope, J. Koehler	27,854
Flue cleaner, G. E. Shirley	27,875
Glass or tile, J. Jacobs	27,878
Grate, F. R. Smith	27,876
Hammer, lifter and tack puller, W. C. Hooker	27,861
Jug, Pope & Kidder	27,859
Lantern body, E. M. Rosenbluth	27,862
Pen wiper holder, J. A. Healy	27,853
Plate, pie, J. Dunlop	27,858
Plumber's trap, F. Kirchner	27,866
Puzzle board, W. J. Fleming	27,880
Soap cake, C. M. Blackman	27,864
Socket member of detachable fasteners, W. S. Richardson	27,865
Spectacle or eyeglass temple, S. G. Marshutz	27,851
Spoons, etc., handle for, W. C. Codman	27,850
Spoons, etc., handle for, E. Holbrook	27,846 to 27,849
Stove, heating, E. G. Germer	27,877
Switch and signal supporting standards, foundation for, H. Johnson	27,869
Target, flying, H. F. Parker	27,881
Teething ring, Coakley & Robbins	27,852
Toy, J. T. Henderson	27,879
Washing machine sprayer attachment, W. T. Bessonette	27,868

TRADE MARKS.

Balls and ball bearings, Grant Ball Company	30,840
Beer, estate of J. F. Trommer	30,846
Beer, lager, A. G. Hupfel	30,845
Cigarettes or small cigars, all tobacco, E. Seidenberg, Stiefel & Company	30,844
Coffee, cereals, dried fruit, candies and condensed milk, T. Martindale	30,848
Coffee or coffee substitute, cereal, Roka Food Company	30,847
Cutlery and other cutting edge tools, Farwell, Ozmun, Kirk & Company	30,837
Embroidered articles, such as handkerchiefs, doilies and tidies, Schultz, Tanner & Company	30,870
Flour, roller or patent, John P. Dousman Milling Company	30,854
Flour, wheat, Ballard & Ballard Company	30,850 to 30,852
Flour, wheat, H. L. Wright	30,853
Glue and sizing, M. R. Isaacs	30,865
Hair tonic, T. McGowan & Brothers	30,856
Insulator consisting of a black liquid to be applied with a brush, electrical, Mica Insulator Company	30,864
Lumber, manufactured, J. W. Sanborn	30,836
Paints and ingredients thereof, Griffiths Brothers & Company	30,866
Plasters, Seabury & Johnson	30,855
Remedies for diseases of women, J. B. Danis	30,858
Remedies for eczema and skin diseases, A. Wood	30,859
Remedy for bunions, corns, chilblains, frost bites, ingrowing nails, stinging feet and other ailments incident to the feet, F. B. Morgan	30,860
Rubber, erasive, Paramount Rubber Company	30,867
Sardines in oil, La Manna, Azema & Farnan	30,849
Sewing cotton and silks, yarns and threads of various kinds, Aktiengesellschaft fur Textil-Industrie, vormals Dollfus-Mieg & Cie	30,869
Sewing cotton, threads, yarns, worsted or hair and braids, trimmings and passementerie, Aktiengesellschaft fur Textil-Industrie, vormals Dollfus-Mieg & Cie	30,868
Soap and washing powder, Oettinger Company	30,863
Soap, laundry, toilet and dyeing, W. V. Blissett	30,862
Tires and parts thereof, pneumatic, American Dunlop Tire Company	30,839
Tires, hose, belting and horseshoes, articles composed in whole or in part of rubber, including, Whitman & Barnes Manufacturing Company	30,838
Tobacco and cigarettes, chewing and smoking, Liggett & Myers Tobacco Company	30,841 to 30,843
Toilet preparation, N. Carr	30,861
Tonic and laxative, Johnson Brothers	30,857

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York. Special rates will be given where a large number of copies are desired at one time.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For **full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.**

Sargent's Artistic Hardware

Good Taste in the selection of Hardware adds to the pleasures of home. A selection from **"Sargent's Book of Designs"** means that the best has been chosen. A copy of this book sent free upon application to SARGENT & CO., 37 Chambers Street, New York.

Sargent's Easy Spring Locks

EAGLE Graphophone
$10

A Perfect Talking Machine.
Send for Catalogue of Special Outfits.
RECORDS $5 per Dozen.
Agents and Dealers Wanted in All Localities.
HAWTHORNE & SHEBLE,
606 Chestnut Street, Philadelphia, Pa.
GENERAL SALES AGENTS.

THE U. S. GOVERNMENT
buys only the best. When in the market for merchandise it obtains samples and submits them to rigid expert examination before placing its order. Since 1890 the Government has purchased MASON & HAMLIN
ORGANS and PIANOS
exclusively for the equipment of its Indian schools as well as for the ships of the "White Squadron." Wise men profit by the experience of others. The experience of the Government experts is available for every one.
MASON & HAMLIN CO.,
Boston, New York, Chicago and St. Louis.

50 YEARS' EXPERIENCE
PATENTS
TRADE MARKS
DESIGNS
COPYRIGHTS &c.
Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.
Patents taken through Munn & Co. receive *special notice*, without charge, in the
Scientific American.
A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.
MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

STEEL STAMPS FOR MARKING TOOLS & C
NAME STAMPS 10¢ PER LETTER.
FIGURE & ALPHABET SETS AT LOWEST PRICES.
BEST STEEL. ALL WARRANTED. SEND FOR CIRCULAR.
SCHWAAB STAMP & SEAL CO
MILWAUKEE, WIS.

NO MORE "POISON IN THE BOWL"
No excuse for smoking foul pipes,
The "Mallinckrodt" Patent Nicotine Absorbent and Ventilated Tobacco Pipe

will render smoking a healthy enjoyment. Try it and you will become convinced. See notice, SCI. AM. of *August 7, '97.*
Manufactured only by
The Harvey & Watts Co., Station E, Philadelphia, Pa and No. 275 Canal Street, New York.
☞ *Illustrated Circulars "S. A." mailed on application.*

BOOKS WORTH HAVING.
Best Books on all subjects of
NATURAL HISTORY.
THE NATURAL HISTORY BOOK STORE,
BRADLEE WHIDDEN, Publisher,
Send for Catal. 28 Arch St., Boston, Mass.

INVENTORS HAVE MODELS
IDEAS DEVELOPED
SLOT AND ANIMATED PICTURE MACHINES
DESIGNED & BUILT BY THE UNION MODEL WORKS
CATALOGUE FREE. 193 S. CLARK ST. CHICAGO.

$5.49 **ELGIN WATCH**

Ladies or Gents size, stem wind and set.
WARRANTED 20 YEARS.
Elgin made movement in a 14 k. Gold filled hunting case, elegantly engraved. Fit for a king. No better watch made than an Elgin. Must be seen to be appreciated. Special Offer for the next 60 days, send us your full name and address and we will send this watch by express C. O. D. with privilege of examination. If found satisfactory pay the agent our special price, $5.49 and express charges. A guarantee and beautiful chain and charm sent free with every watch. Write at once as this may not appear again. Address,
NAT. MFG. & IMPORTING CO., 334 Dearborn St., B-105, Chicago

WATCH AND CHAIN FOR ONE DAY'S WORK.

Boys and Girls can get a Nickel-Plated Watch, also a Chain and Charm for selling 1½ doz. Packages of Bluine at 10 cents each. Send your full address by return mail and we will forward the Bluine, post-paid, and a large Premium List. No money required.
BLUINE CO., Box 108 Concord Junction, Mass.

BRASS BAND

Instruments, Drums, Uniforms, Equipments for Bands and Drum Corps. Lowest prices ever quoted. Fine Catalog, 400 Illustrations, *mailed free;* it gives Band Music & Instructions for Amateur Bands.
LYON & HEALY, 33-35 Adams St., Chicago.

APPARATUS for Production and Manipulation of Light, Acetylene Gas Generators, Electric Light Stereopticons and Animated Picture Machines, etc. ☞ *Catalogues Free.*
J. B. COLT & CO. 115 & 117 Nassau Street, New York. 189 La Salle Street, Chicago, Ill. 131 Post Street, San Francisco, Cal. Acetylene House Lighting Show Rooms, Broadway and 37th Street, New York.

PROPOSALS.
THE CITY AUTHORITIES OF PRESCOTT, ARK., will let contract December 8th, 1897, for a system of water works and electric lights. The plant will be put in under Local Improvement Statute, authorizing a one per cent assessment on real estate.

MODELS SECRECY GUARANTEED. Equipped for all classes of work. J. C. SEYL, 181 Madison St., CHICAGO.

SPECTACLES { F. E. BAILEY sells spex cheap. Write for new optical catalogue. 271 Wabash Ave., Chicago.

FILMS & MACHINES FOR ANIMATED PHOTOGRAPHS F. L. WILLARD 196 LEXINGTON AVE. BROOKLYN N.Y.

ICE MACHINES, Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton Street, Milwaukee, Wis.

WANTED to correspond with parties familiar with the manufacture of Portland and other cements. Address, C. W. Nicklaus, Elgin, Iowa.

ELECTRICAL Bicycle, and Photo. Novelties, low prices, 100 page cat. FREE M. E. S. CO., 32 Cortlandt St., N.Y.

COMPLETE SHOP with lathe, power and foot presses for sale, good chance for tool and die maker or manufacturer of small metal goods. Address A. H., 194 Chambers Street, New York.

NOVELTIES & PATENTED ARTICLES Manufactured by Contract. Punching Dies. Special Machinery. E. Konigslow, 181 Seneca St., Cleveland, O.

STEEL TYPEWRITER TYPE
TYPE WHEELS, MODELS & EXPERIMENTAL WORK, SMALL MACHINERY NOVELTIES & ETC. NEW YORK STENCIL WORKS 100 NASSAU ST. N.Y.

Experimental & Model Work
Cirs. and advice free. Gardam & Son, 45-51 Rose St., N.Y.

MECHANICAL DRAWING and Surveying taught by mail. Terms very reasonable. Catalogue free. Black Corresp. School, Paterson, N. J.

FOR SALE—Patent No. 411,220, on Improved Horse Hay Fork. Will sell outright or by state rights. For terms and particulars, address **D. A. GOCHNAUER,** EAST BERLIN, PA.

GAS AND GASOLINE ENGINES
WATER MOTORS
BACKUS WATER MOTOR CO. NEWARK N. J. U. S. A.

VOLNEY W. MASON & CO.,
Friction Pulleys, Clutches & Elevators
PROVIDENCE R. I.

Odd Tools You Need
for almost any purpose can be found in our store. Bicycle tools and materials a specialty. Everything, from a screw to a handle bar. ☞ Send for list, free.
THE FRASSE CO., 21 WARREN ST., NEW YORK

WOODEN TANKS.
For Railroads, Mills and Manufactories.
Builders of Steel Towers and Tanks.
La. Red Cypress Wood Tanks a specialty.
W. E. CALDWELL CO.,
217 E. Main Street, Louisville, Ky.

THE EUREKA CLIP
The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by
Consolidated Safety Pin Company,
Box 95, Bloomfield, N. J.



RECENT ARCHÆOLOGICAL DISCOVeries in the Nile Valley.—An account of M. de Morgan's latest researches. SCIENTIFIC AMERICAN SUPPLEMENT 1138, price 10 cents. For sale by Munn & Co. and all newsdealers. Send for new catalogue.

The ECLIPSE DYNAMO & BATTERY OUTFIT ONLY $1.00



This Dynamo and Battery is a wonder of utility, mechanical perfection and cheapness. Supersedes induction coils and chemical batteries, for curative purposes. Gives a stronger current without continual expense and bother of replacing chemicals. Has current regulator; can be adjusted to a nervous child, or so it will overpower the strongest man. It is the most interesting instrument for the study of electricity ever produced. Every scholar needs one. An evening party can be entertained for hours with experiments made on this dynamo. **INVALIDS may cure** themselves by its use without expense. **It is an established** fact that **electricity cures rheumatism, gout, neuralgia, numbness** and **nervous troubles.** It increases the circulation of blood, and displaces weakness and exhaustion, with strength and activity. In fact, electricity is the one great element the emaciated system requires. The Eclipse Dynamo offers to all an inexhaustible supply of this powerful agent. It is fully equipped with armature magnet, brush, multiplying gear, crank, and current breaking switch; all parts perfectly made and handsomely finished. Packed in a strong wood box with full instructions for medical use, and many amusing electrical experiments. Price, complete, only **$1.00** each by express. If you live beyond the Mississippi, it might be cheaper to send 35c. extra and have Dynamo sent you by mail, postpaid. Your money back if wanted.
KIRTLAND BROS. & CO., 111 Nassau St., N. Y.

© 1897 SCIENTIFIC AMERICAN, INC.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion, - 75 cents a line
Back Page, each insertion, - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

Eclipse 1898 Bicycles

FITTED WITH

Automatic Coaster and Brake.



Wheel Always Under Perfect Control

Because Your feet Are always On the Pedals.

The Coaster consists of automatic clutch in the rear sprocket, which is thrown out of gear by holding the pedals still. The machine moves on with the chain and sprockets stationary and your feet on the pedals.

The Brake applied by back pressure on the pedals, which throws a spoon on tire of rear wheel. Released by forward movement of pedals.

Touring Made Easy. Street Riding Made Safe.

☞ *Send for Circular describing in detail.*

ECLIPSE BICYCLE CO.
Box X, ELMIRA, N. Y., U. S. A.

GARDNER GRINDER FOR FLAT SURFACES ACCURATE & RAPID FOR UP-TO-DATE SHOPS
C. H. BESLY & Co. CHICAGO, ILL. U.S.A.

HALF A CENTURY OF CYCLES.—AN interesting history of the cycle from its origin up to the present time. The first crank-driven bicycle. The "bone-shaker" and its successors. The tricycle. The modern wheel. Cycle building a science. Points of improvement. The pneumatic tire. A hand and foot cycle. With 9 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1012. Price 10 cents. To be had at this office and from all newsdealers.



THE **Motor of 19th Century** Used ANY PLACE BY ANYONE FOR ANY WORK

No Fire! No Boiler! No Gauges! No Engineer! No Ashes! No Danger! Cost of operation about **1 Cent** an hour to each indicated H. P.

ECONOMY, RELIABILITY, SIMPLICITY, SAFETY.

☞ *Catalogue, Testimonials, etc., by addressing*

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

The Fifty Dollar Tribune

The Best Wheel for the Price in the World.

Do not think of buying until you have seen it.

The Famous Blue Streak.

Faster Than Ever.

Write for Advance Sheets. 1898 Prices Ready.

☞ *Secure the Agency if Possible.*

The Black Mfg. Co., Erie, Pa.

THE

GREATEST PENETRATING LIGHT IN THE WORLD

FIRST PRACTICAL ACETYLENE GAS BICYCLE LAMP ON THE MARKET.

ABSOLUTELY SAFE ALWAYS RELIABLE

Calcium King



Sold by the trade. Price $5 including two boxes Carbophene charges.

Strong adjustable bracket sent with each lamp.

HANDSOME PRACTICAL MECHANICAL

No oil, no wick, no smoke, no odor. Always clean; cannot jar out. Cost of maintenance nominal. Charged and re-charged in a minute. Send for circular matter, containing detailed information.

THE CEO. H. CLOWES MFG CO.,
464 Bank St., Waterbury, Conn., U. S. A.

The "Calcium King" can be seen, also circular matter and further information obtained at the following places:
New York—Randolph & Clowes, 202 Postal Telegraph Bldg.
Boston—Randolph & Clowes, Oliver and Purchase Sts.
Philadelphia—Randolph & Clowes, 320 Phila. Bank Bldg.
Chicago—Randolph & Clowes, 226 Lake St.
Cincinnati—Randolph & Clowes, Room 308 Neave Bldg.



A Big Money Making Business!

FOR PUBLIC EXHIBITION OR PRIVATE USE.

The CINEOGRAPH

A LIFE MOTION PICTURE MACHINE,

IN COMPLETE RUNNING ORDER, AND

Four Fifty Feet Films Free!

ALL FOR $75.00.

Weight Only 40 pounds.

Shows a Life Motion Picture 16x20 feet.
So simple in construction a child can operate it.

Send for Illustrated Catalogues of Cineographs and Films, and 100 Testimonial Letters from *Successful Exhibitors.*

S. LUBIN, Manufacturing Optician, 19 So. 8th St., Philadelphia, Pa., U. S. A.

THE BICYCLE: ITS INFLUENCE IN Health and Disease.—By G. M. Hammond, M.D. A valuable and interesting paper in which the subject is exhaustively treated from the following standpoints: 1. The use of the cycle by persons in health. 2. The use of the cycle by persons diseased. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1002. Price 10 cents. To be had at this office and from all newsdealers.

Eastman's No. 2 Eureka Camera is a simple instrument for use with glass plates. Makes pictures 3½ x 3½ inches, and has space in back for three double plate holders. Safety shutter. Fine achromatic lens.



$4.00

Price No. 2 Eureka Camera, with one double plate holder, - - - - - $4.00
" Extra Double Plate Holders, each, - - .75
" Eastman's Extra Rapid Dry Plates, 3½ x 3½, per doz., .35

For sale by all dealers. Booklet of Eurekas and Bicycle Kodaks free at agencies or by mail.

EASTMAN KODAK CO.

Rochester, N. Y.

Thorough Inspections

AND

INSURANCE AGAINST LOSS OR DAMAGE TO PROPERTY AND LOSS OF LIFE AND INJURY TO PERSONS CAUSED BY

Steam Boiler Explosions

HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO. HARTFORD, CONN.

J. M. ALLEN, PRES. W. B. FRANKLIN, VICE PRES.
J. B. PIERCE, SEC. F. B. ALLEN, 2D VICE PRES

Round Writing

The most handsome, neatest, quickest and most easily acquired ornamental lettering. Based on mathematical principles, anybody can learn it in a few hours from the Methodical Textbook to Round Writing, complete with an assortment of 25 single and double pointed pens, postpaid, $1.10. The most practical system of lettering for maps, plans, book headings, insurance policies, diplomas, legal documents, price tickets, etc.

KEUFFEL & ESSER CO., 44 Ann Street, NEW YORK.

WORK for men with little capital and great energy. How to give **Stereopticon** and **Magic Lantern** exhibitions—list of **Views**, etc., **THAT PAYS** in 250 page catalog, sent **free.**
McALLISTER, Mfg. Optician, 49 Nassau St., N. Y.

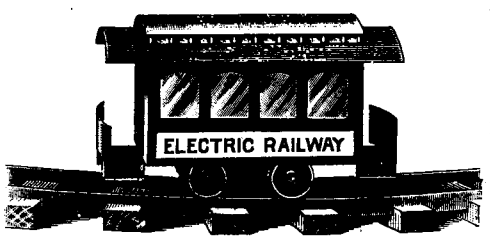

Electrical Novelties

Railway shown in cut, with Battery and Track, ready to run, price . **$3.50**

☞ Send for Catalogue of Show Window Attractions, Hand Dynamos, Water Motor Dynamos, Inclined Planes, etc.

THE CARLISLE & FINCH CO.
SIXTH STREET, CINCINNATI, O.

At ¼ Price Bicycles, Watches, Guns, Buggies, Harness, Sewing Machines, Organs, Pianos, Safes, Tools, Scales of all varieties and 1000 other articles. Lists free. CHICAGO SCALE CO., Chicago Ill.



X Ray Tubes

WITH AUTOMATIC ADJUSTABLE VACUUM ATTACHMENT.

Impossible to run too high in vacuum.
Life prolonged indefinitely.

Roentgen Ray Apparatus:

Coils (Induction and High Frequency), **Fluoroscopes, Motor-Generators, etc.**

MINIATURE INCANDESCENT LAMPS,
Candelabra, Series, Decorative, Battery

EDISON DECORATIVE & MINIATURE LAMP DEPT.
(General Electric Co.) **Harrison, N. J.**

BICYCLE TIRE REPAIRING.—THE Mending of Single Tube Tires.—A practical article illustrating the method of inserting patches and plugs with pliers and pluggers, together with rubber band plugging and the use of puncture bands. 9 illustrations. Contained in SUPPLEMENT 1102. Price 10 cents. For sale by Munn & Co. and all newsdealers.

HOLDS HOSE

with a vise-like grip, and never tears the fabric. Lift the little lever and the jaws are released. No elastic band to bind the leg. Same idea applied to Cuff and Necktie Holders, Suspender Buttons, Eyeglass Holders and Key Chains. By mail 10 cents each. 25 cents for Aluminum or Phosphor Bronze Key Chains. Illustrated booklet for the asking.

AMERICAN RING CO., Box P, Waterbury, Conn.

Bristol's Patent Steel Belt Lacing.



The simplest, cheapest and most perfect Belt Fastening for all kinds of belting. *Samples sent free.*

The Bristol Co.
Waterbury Conn.

LENSES

of every description and in any quantity manufactured to order.

Photographic, Projection Lantern, Bicycle Lamp, Search Light, etc.

BAUSCH & LOMB OPTICAL CO.,
515½ N. St. Paul St., Rochester, N. Y.

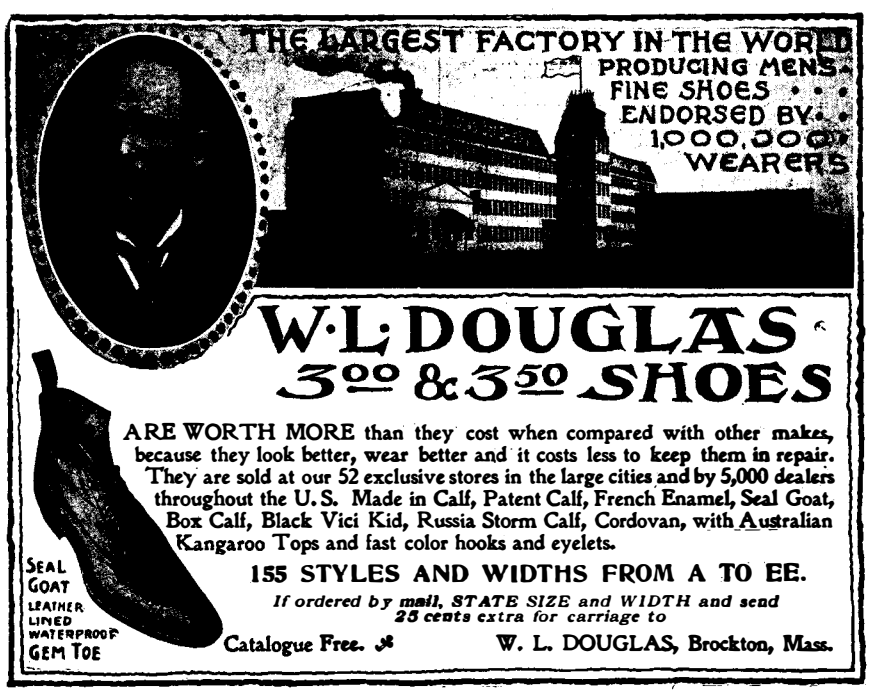
THE LARGEST FACTORY IN THE WORLD PRODUCING MENS FINE SHOES
ENDORSED BY 1,000,000 WEARERS
SEAL GOAT LEATHER LINED WATERPROOF GEM TOE

W. L. DOUGLAS $3.00 & $3.50 SHOES

ARE WORTH MORE than they cost when compared with other makes, because they look better, wear better and it costs less to keep them in repair. They are sold at our 52 exclusive stores in the large cities and by 5,000 dealers throughout the U. S. Made in Calf, Patent Calf, French Enamel, Seal Goat, Box Calf, Black Vici Kid, Russia Storm Calf, Cordovan, with Australian Kangaroo Tops and fast color hooks and eyelets.

155 STYLES AND WIDTHS FROM A TO EE.

If ordered by mail, STATE SIZE and WIDTH and send 25 cents extra for carriage to

Catalogue Free. W. L. DOUGLAS, Brockton, Mass.

RAY CAMERAS

Four Sizes.
Eight Styles.

Have all the improvements of others and more.



They are "up-to-date" and the only **Camera** using our **New Patent Plate Holder,** which are the **cheapest,** most **compact** and most **durable** on the market. *Catalogue Free.*

MUTSCHLER, ROBERTSON & CO.
175 West Main Street, Rochester, N. Y.

BALL BEARING AXLES AND RUBber Tires.—A paper read before the Carriage Builders' National Convention, Philadelphia, October, 1894, showing the advantage to be derived from the use of ball bearings and pneumatic tires in road vehicles. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 992. Price 10 cents. To be had at this office and from all newsdealers.



The fraction of a second is valuable in the action of a revolver. The SMITH & WESSON Revolver never hangs fire.

☞ *Descriptive Catalogue.*

SMITH & WESSON,
14 Stockbridge St., Springfield, Mass.

IMPERIAL BALL BEARING AXLE

'97 PATTERN.

Endorsed by the Leading Carriage Builders.
TO RIDE EASY, GET RUBBER TIRES.

The Kelley, Maus & Co. Tire is the best on the market.

☞ *Write for Descriptive Catalogue.*

KELLEY, MAUS & CO., Imperial Ball Bearing Axle and Vehicle Rubber Tire Dept., 439 Wabash Av., Chicago.

Wood Workers' Tools.

With our Metalworkers' Catalogue **"A BOOK OF TOOLS,"** and our new Woodworkers' Catalogue **"WOODWORKERS' TOOLS,"** you have before you the World of Tools. Nothing as complete or comprehensive has ever been printed. Either book sent, postpaid, upon receipt of 25 cents. (Your money back if you're not satisfied.)

THE CHAS. A. STRELINGER CO.
Address Box 12½. **DETROIT, MICH.**

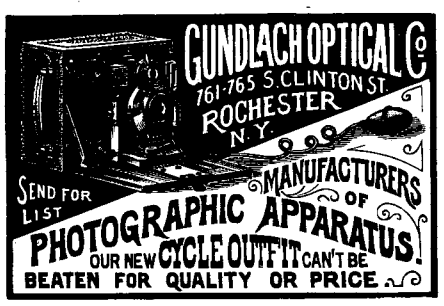
GUNDLACH OPTICAL Co
761-765 S. CLINTON ST.
ROCHESTER N.Y.
SEND FOR LIST
MANUFACTURERS OF PHOTOGRAPHIC APPARATUS!
OUR NEW CYCLE OUTFIT CAN'T BE BEATEN FOR QUALITY OR PRICE

Do You Manufacture Anything?

If so, you must be interested in the machinery that makes your own goods and those of your competitors. You would like to see and read about improvements in such machinery, to hear of new mechanical inventions that will be a boon to you by increasing your facilities and reducing your expenses. To keep up with the times in all such matters, and in every branch of science, you should subscribe for the

Scientific American

which is the acknowledged leader of all publications in the world devoted to science and mechanical arts. Published weekly, 16 pages, illustrated. $3.00 a year postpaid, $1.50 for six months, $1.00 for four months. Remit by check, draft or P. O. order payable to

MUNN & CO., Publishers,
361 Broadway, New York City.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM JESSOP & SONS Ltd 91 JOHN ST. NEW YORK

PRINTING INKS

The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St. opp. Duane, New York

© 1897 SCIENTIFIC AMERICAN, INC.